

LINEAR INTEGRATED CIRCUIT

TDA 1410

www.DataSheet4U.com

PRELIMINARY DATA

MONOLITHIC QUASI-COMPLEMENTARY DUAL DARLINGTON IN PENTAWATT® PACKAGE

The TDA 1410 is a monolithic integrated circuit in Pentawatt® plastic package consisting of a pair of quasi-complementary (NPN-PNP) darlintons with the associated biasing system. Each darlington can deliver a current in excess of 3A and can withstand a supply voltage of 36V. The device is intended for applications as:

- booster for operational amplifier
 - DC motor driver
 - stepping motor driver
 - output stage for AC power amplifier up to 12W in Hi-Fi systems
 - output stage for vertical deflection systems in colour TV etc.

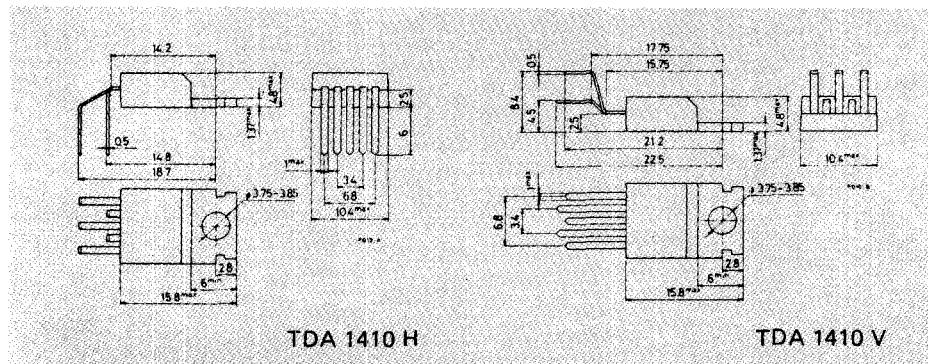
ABSOLUTE MAXIMUM RATINGS

V_{CEO}	Collector-emitter voltage ($I_B = 0$)	36	V
V_{CBO}	Collector-base voltage ($I_E = 0$)	50	V
I_o	Output peak current (repetitive)	3.5	A
I_o	DC output current	3	A
$I_F D_1$	D1 forward current	0.3	A
$I_F D_2$	D2 forward current	3	A
P_{tot}	Total power dissipation at $T_{case} = 60^\circ\text{C}$	30	W
T_J, T_{stg}	Junction and storage temperature	-40 to 150	$^\circ\text{C}$


**ORDERING NUMBERS: TDA 1410 H
TDA 1410 V**

MECHANICAL DATA

Dimensions in mm




CONNECTION AND SCHEMATIC DIAGRAMS



+Vs
OUTPUT
-Vs
INPUT
INPUT

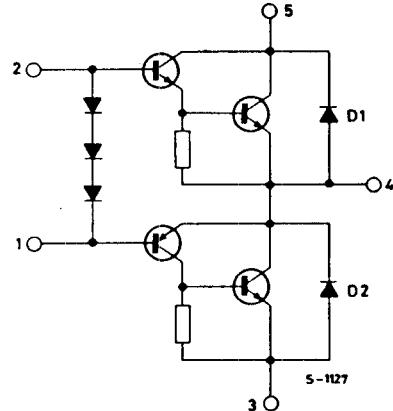5-1128



5-1127

THERMAL DATA

$R_{th(j-case)}$ Thermal resistance junction-case	max.	3 °C/W
---	------	--------

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^\circ C$)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{CEO}	Collector-emitter breakdown voltage		36		V
V_{CBO}	Collector-base breakdown voltage		50		V
$V_{(BR)CSSO}$	Collector-substrate breakdown voltage		50		V
$h_{FE(NPN)}$	DC forward current transfer ratio	$I_C = 2A$	$V_{CE} = 5V$	2000 5000	-
$h_{FE(PNP)}$	DC forward current transfer ratio	$I_C = -2A$	$V_{CE} = -5V$	800 2500	-

ELECTRICAL CHARACTERISTICS (continued)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_d Quiescent drain current	$I_{2-1} = 5 \text{ mA}$ $V_s = 34V$		20		mA
$V_{CE(\text{sat})}$ Collector-emitter saturation voltage (NPN-PNP)	$I_C = 2A $ $h_{FE} = 200$		1.7	2.3	V
$V_{BE(\text{NPN})}$ Base-emitter voltage (pins 2-4)	$I_C = 2A$		2		V
$V_{BE(\text{PNP})}$ Base-emitter voltage (pins 1-4)	$I_C = -2A$		-0.9		V
$V_F(D_1)$ D1 forward voltage	$V_{3-5} = -34V$ $I_{F(D_1)} = 0.3A$		1.5		V
$V_F(D_2)$ D2 forward voltage	$I_{F(D_2)} = 3A$		5		V
$f_T(\text{NPN})$ Cutoff frequency	$I_C = 2A$ $V_{CE} = 10V$	10			MHz
$f_T(\text{PNP})$ Cutoff frequency	$I_C = -2A$ $V_{CE} = -10V$	5			MHz


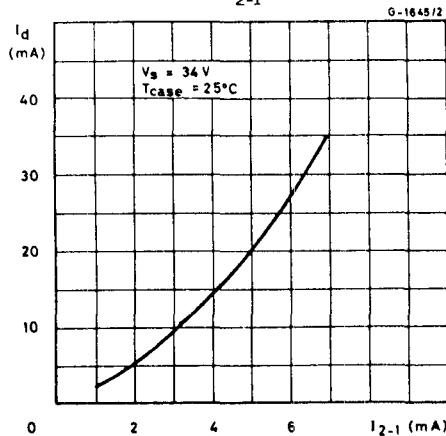
Fig. 1 - Typical quiescent drain current vs. I_{2-1} 

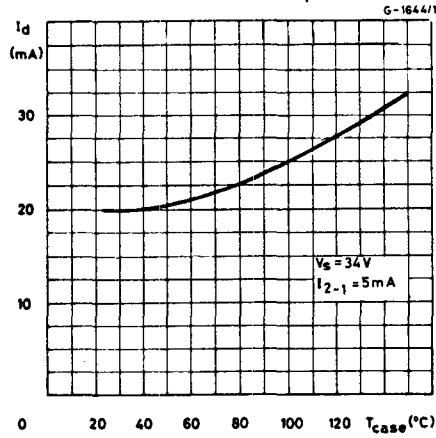Fig. 2 - Typical quiescent drain current vs. case temperature



TDA 1410

www.DataSheet4U.com

Fig. 3 – Typical quiescent drain current vs. supply voltage

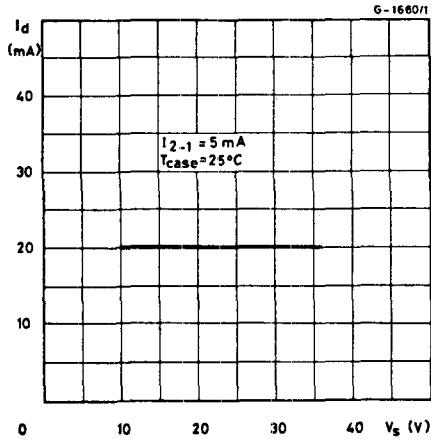


Fig. 4 – Typical DC current gain vs. collector current

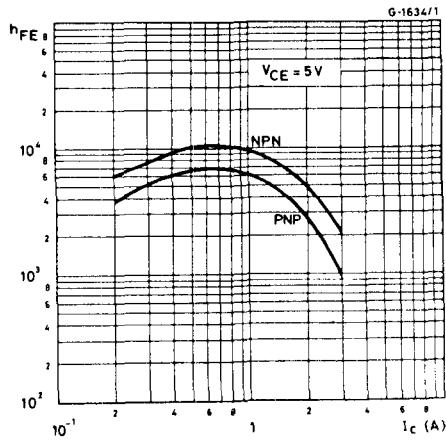


Fig. 5 – Typical $V_{CE(sat)}$ vs. collector current

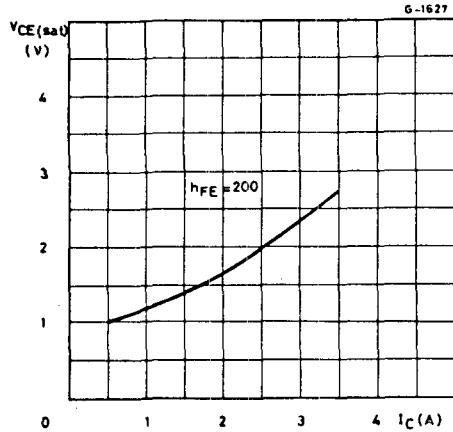


Fig. 6 – Typical V_{BE} vs. collector current

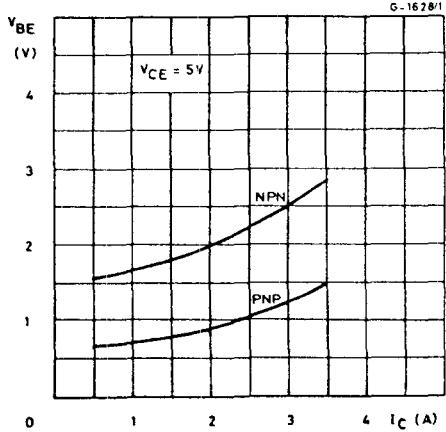


Fig. 7 – Typical pulse response
(rising edge)

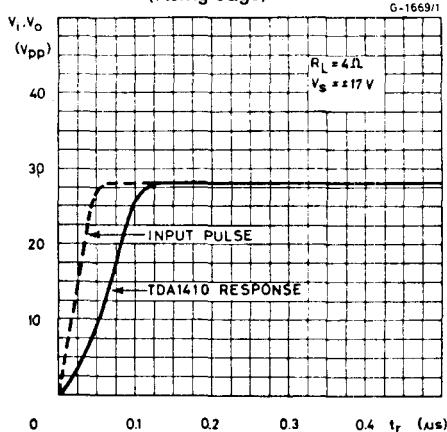


Fig. 8 – Typical pulse response
(falling edge)

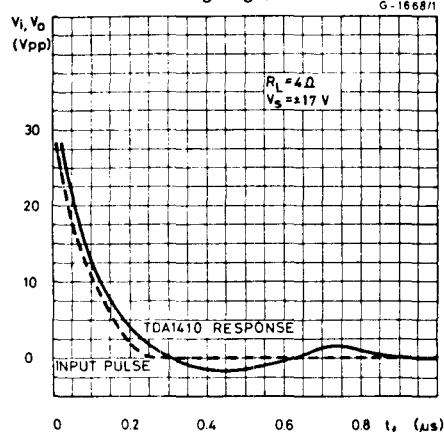


Fig. 9 – Typical output voltage swing
vs. frequency


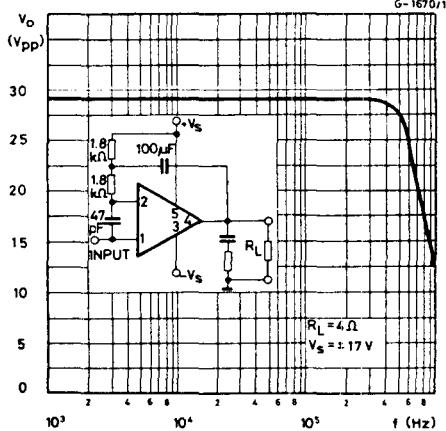


Fig. 10 – Safe operating areas

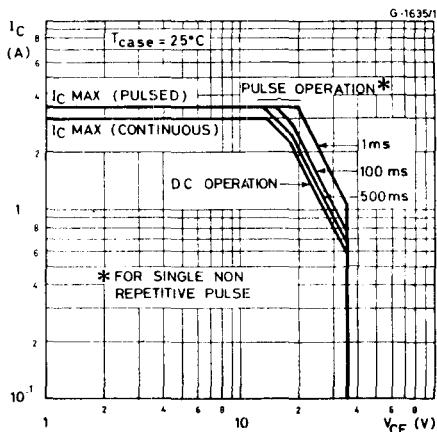


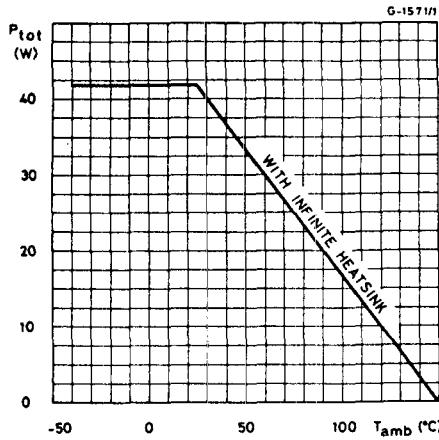
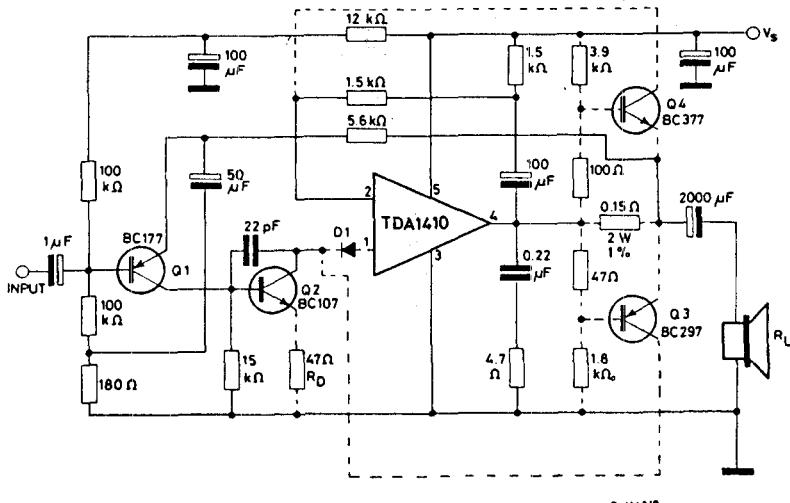


Fig. 11 - Derating characteristic

APPLICATION INFORMATION

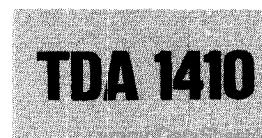Fig. 12- Hi-Fi audio amplifier with short circuit protection




Typical performance of circuit in fig. 12

Parameter	Test conditions	Min.	Typ.	Max.	Unit
P_o Output power	$d = 1\%$ $G_v = 30 \text{ dB}$ $f = 40 \text{ to } 15,000 \text{ Hz}$ $V_s = 25V$ $R_L = 4\Omega$ $V_s = 27V$ $R_L = 8\Omega$	10	12		W
	$d = 10\%$ $G_v = 30 \text{ dB}$ $f = 40 \text{ to } 15,000 \text{ Hz}$ $V_s = 25V$ $R_L = 4\Omega$ $V_s = 27V$ $R_L = 8\Omega$	8	9	16	W
B Frequency response (-3 dB)	$V_s = 25V$ $R_L = 4\Omega$ $G_v = 30 \text{ dB}$	20 to 100,000			Hz
	$V_s = 25V$ $R_L = 4\Omega$ $P_o = 18W$ $V_s = 27V$ $R_L = 8\Omega$ $P_o = 12W$	960		575	mA

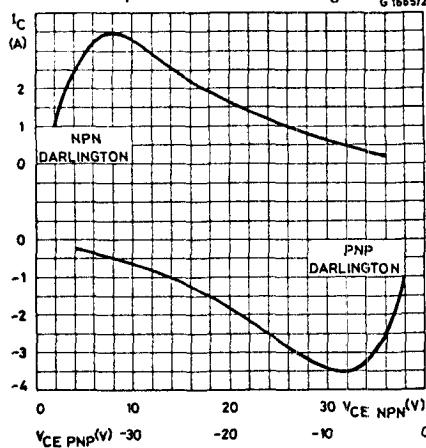
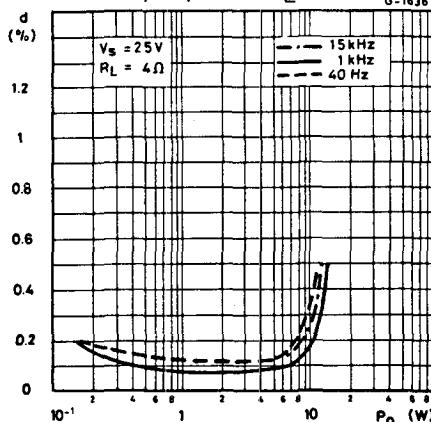
Fig. 13 - Output characteristics of the protected class B stage

Fig. 14 - Typical distortion vs. output power ($R_L = 4\Omega$)


Fig. 15 - Typical distortion vs. output power ($R_L = 4\Omega$)

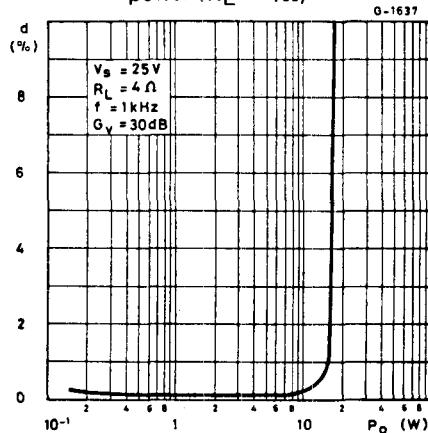


Fig. 16 - Sensitivity vs. output power ($R_L = 4\Omega$)

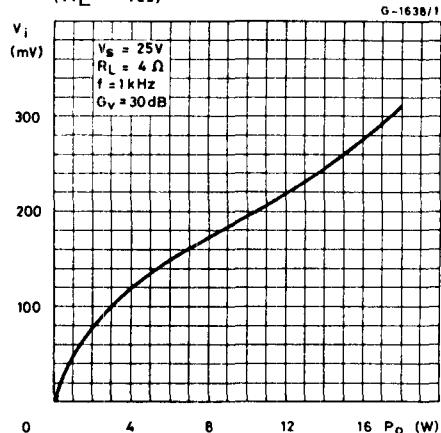


Fig. 17 - Typical power dissipation and efficiency vs. output power ($R_L = 4\Omega$)

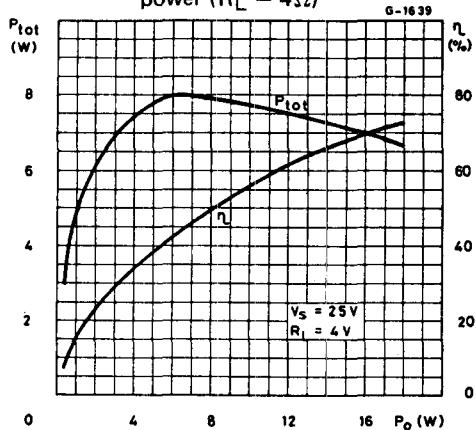


Fig. 18 - Typical distortion vs. output power ($R_L = 8\Omega$)

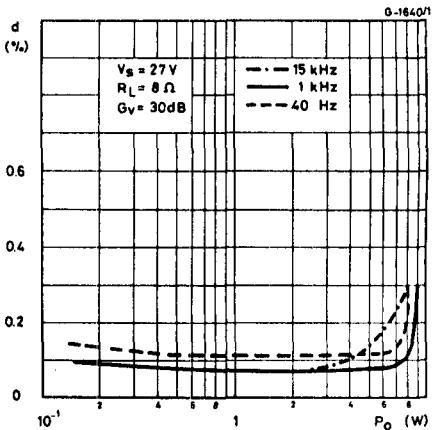


Fig. 19 - Typical distortion vs. output power ($R_L = 8\Omega$)

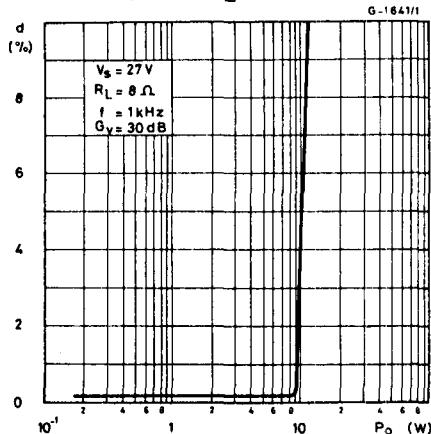


Fig. 20 - Typical sensitivity vs. output power ($R_L = 8\Omega$)

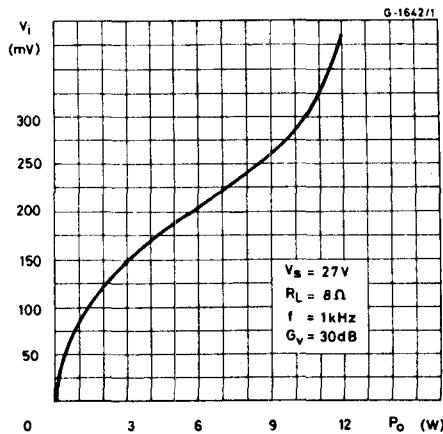


Fig. 21 - Typical power dissipation and efficiency vs. output power ($R_L = 8\Omega$)

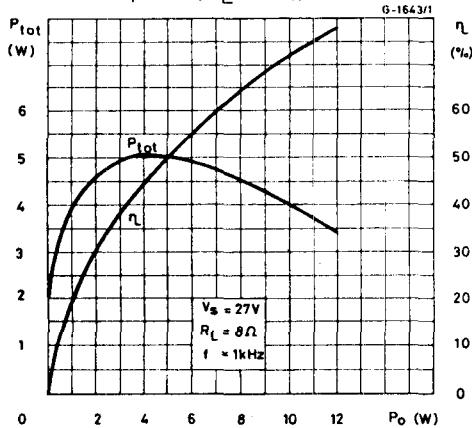


Fig. 22 - Typical output power vs. supply voltage

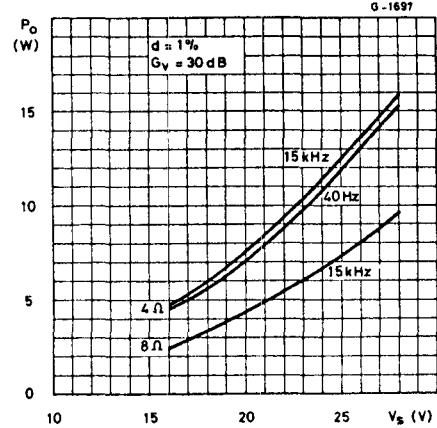


Fig. 23 - H-Fi stereo amplifier with preamplifier-equalizer for ceramic pick-ups.
The final stage is identical to fig. 12.

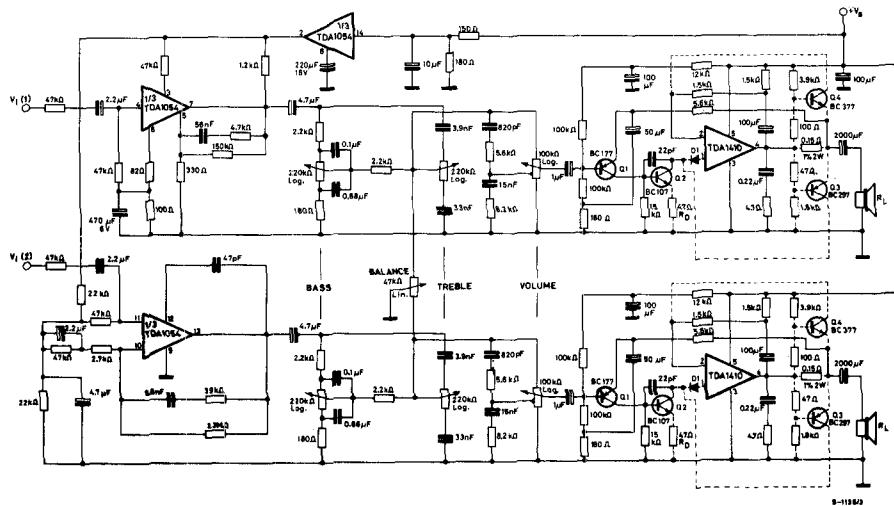


Fig. 24 - Booster for operational amplifier

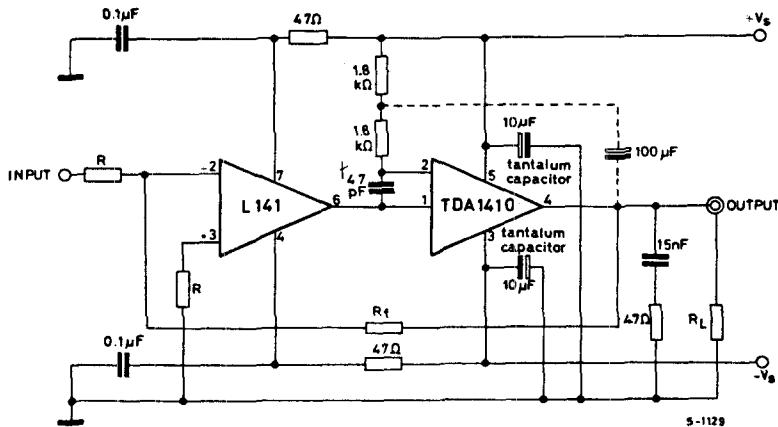


Fig.25 - L 141 + TDA 1410 output voltage swing vs. frequency


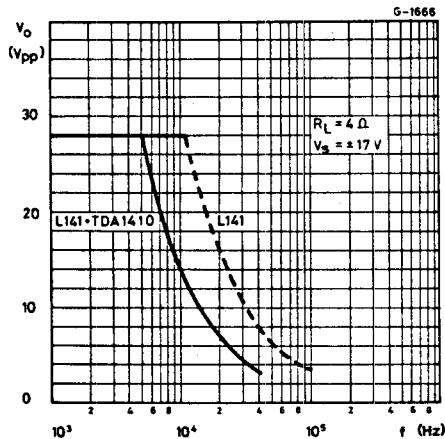


Fig.26 - L 141 + TDA 1410 transient response

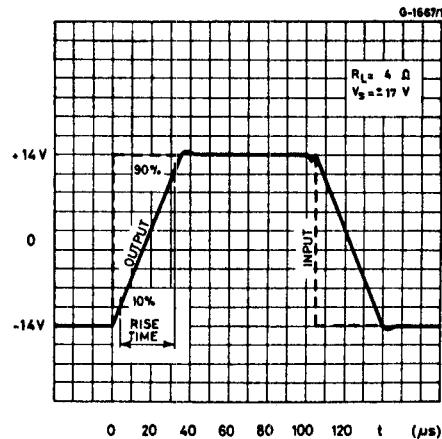

Performance of circuit in fig. 24

	L 141 + TDA 1410
Max. supply voltage Max. power dissipation Input offset voltage Input offset current Input bias current Voltage gain Max. DC output current	$\pm 18V$ 30W at $T_{case} = 60^\circ C$ $\leq 5 mV$ $\leq 200 nA$ $\leq 500 nA$ $\geq 86 dB (R_L = 4\Omega)$ 3A

Fig.27 - Position control of DC motor

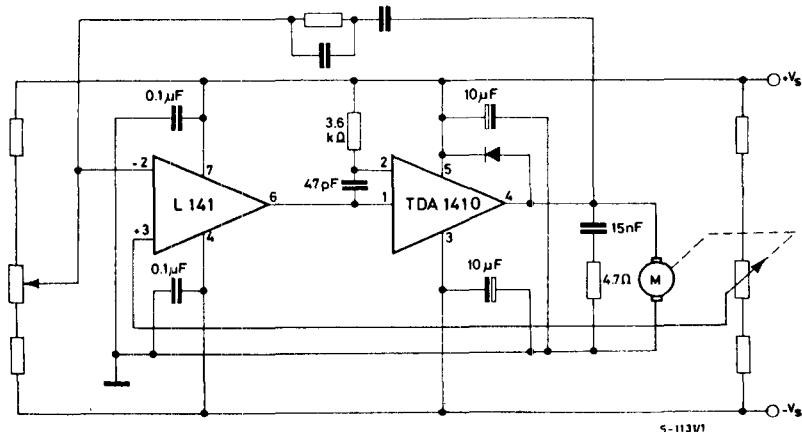


Fig.28 - Stepping motor driver

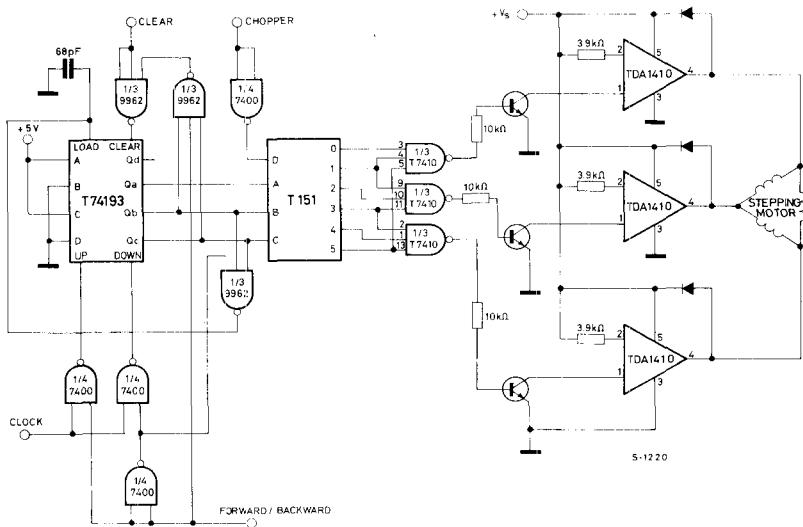


Fig.29 - Bidirectional speed control of DC motor


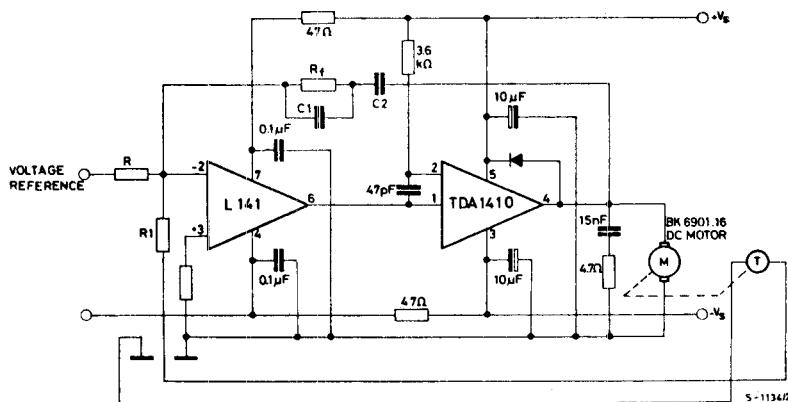



Fig.30 – Programmable supply voltage

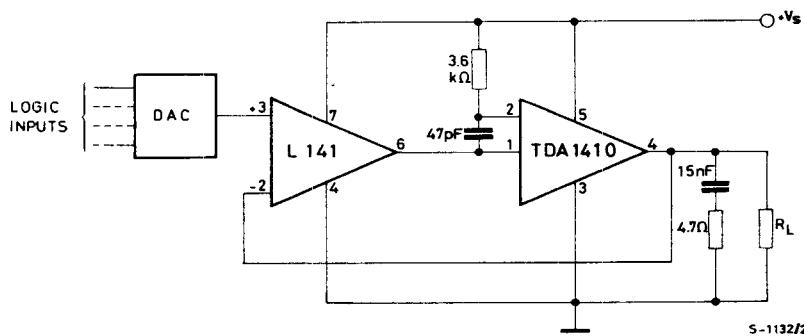

TDA 1410

www.DataSheet4U.com

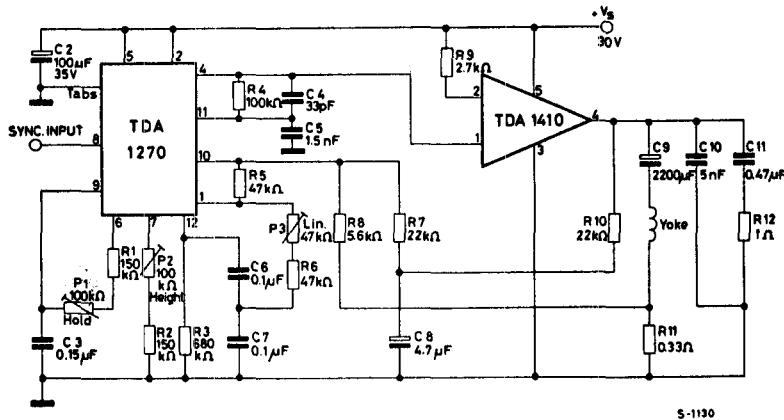Fig.31 - Output stage for vertical deflection system



S-1130