



element14

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[BC161-16](#)

[BC160-16](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant

PNP Medium Power Transistor



Pin Configuration

1. Emitter
2. Base
3. Collector

Features:

- PNP Silicon Power Switching Transistors
- Medium Power Amplifier and Switching Applications

Absolute Maximum Ratings:

($T_a = 25^\circ\text{C}$ unless otherwise specified)

Characteristic	Symbol	BC160-16	BC161-16	Unit
Collector Emitter Voltage	V_{CEO}	40	60	V
Collector Base Voltage	V_{CBO}			
Emitter Base Voltage	V_{EBO}	5		
Collector Current Continuous	I_C	1		A
Power Dissipation at $T_a = 25^\circ\text{C}$ Derate above 25°C	P_D	0.8		W
Power Dissipation at $T_C = 25^\circ\text{C}$ Derate above 25°C		4.57		
Power Dissipation at $T_C = 25^\circ\text{C}$ Derate above 25°C		4		mW/°C
Operating Storage Temperature Range	T_j, T_{stg}	-65 to +200		°C

Thermal Resistance

Junction to Ambient in Free Air	$R_{th(j-a)}$	219	°C/W
Junction to Case	$R_{th(j-c)}$	44	

PNP Medium Power Transistor

Electrical Characteristics:

($T_a = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector Emitter Voltage	V_{CES}	$I_C = 100\mu\text{A}, V_{BE} = 0$ BC160-16 BC161-16	40 60		-	V
	$*V_{CEO}$	$I_C = 30\text{mA}, I_B = 0$ BC160-16 BC161-16	40 60			
Emitter Base Voltage	V_{EBO}	$I_E = 100\mu\text{A}, I_C = 0$	5		-	
Collector Cut off Current	I_{CES}	$V_{CE} = 40\text{V}, V_{BE} = 0,$ BC160-16 $V_{CE} = 60\text{V}, V_{BE} = 0,$ BC161-16	-		100 100	nA
		$T_a = 150^\circ\text{C}$ $V_{CE} = 40\text{V}, V_{BE} = 0,$ BC160-16 $V_{CE} = 60\text{V}, V_{BE} = 0,$ BC161-16			100 100	μA
DC Current Gain	$*h_{FE}$	$I_C = 100\text{mA}, V_{CE} = 1\text{V}$ BC160-16/BC161-16 Group-6 Group-10 Group-16	40 40 63 100		400 100 160 250	-
		$I_C = 1\text{A}, V_{CE} = 1\text{V}$ BC160-16/BC161-16 Group-6 Group-10 Group-16	-		26 15 20 30	
Collector Emitter Saturation Voltage	$*V_{CE(sat)}$	$I_C = 1\text{A}, I_B = 0.1\text{A}$			1	V
Base Emitter on Voltage	$*V_{BE(on)}$	$I_C = 1\text{A}, V_{CE} = 1\text{V}$			1.7	

Dynamic Characteristics

Transition Frequency	f_T	$I_C = 50\text{mA}, V_{CE} = 10\text{V}, f = 20\text{MHz}$	50		-	MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, I_E = 0, f = 1\text{MHz}$	-		30	μF
Input Capacitance	C_{ib}	$V_{EB} = 10\text{V}, I_C = 0, f = 1\text{MHz}$			180	


Switching Characteristics

Turn On Time	t_{on}	$I_C = 150\text{mA}, I_{B1} = 5\mu\text{A}$	-	-	500	ns
Turn Off Time	t_{off}	$I_C = 100\text{mA}, I_{B1} = I_{B2} = 5\mu\text{A}$			650	

*Pulsed : Pulse Duration $\leq 300\mu\text{s}$, Duty Cycle $\leq 1\%$


PNP Medium Power Transistor

TO-39 Metal Can Package

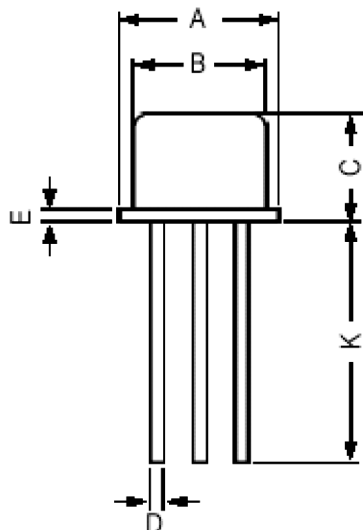

Dim.	Min.	Max.
A	8.5	9.39
B	7.74	8.5
C	6.09	6.6
D	0.4	0.53
E	-	0.88
F	2.41	2.66
G	4.82	5.33
H	0.71	0.86
J	0.73	1.02
K	12.7	-
L	42°	48°

Dimensions : Millimetres

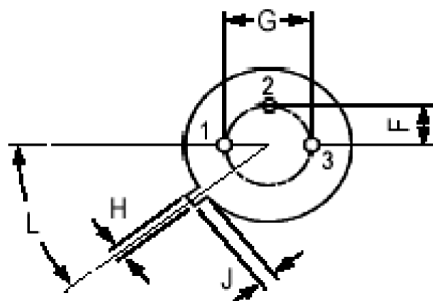

Pin Configuration

1. Emitter
2. Base
3. Collector

Part Number Table

Description	Part Number
Transistor, PNP, TO-39	BC160-16
	BC161-16

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.



element14

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[BC161-16](#)

[BC160-16](#)

EN
This Datasheet is presented by
the manufacturer

DE
Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR
Cette fiche technique est
présentée par le fabricant