


**2N6080**  
**2N6084**

**RF & MICROWAVE TRANSISTORS**  
**130... 230MHz FM MOBILE APPLICATIONS**

- FREQUENCY 175MHz
- VOLTAGE 12.5V
- POWER OUT 4 --- 40W
- HIGH POWER GAIN
- HIGH EFFICIENCY
- FM CLASS C TRANSISTORS
- COMMON EMITTER




**.380 4LSTUD (M135)**  
 epoxy sealed

ORDER CODE	BRANDING
SD1012	2N6080
SD1014-02	2N6081
SD1229-07	2N6082
SD1229-08	2N6083
SD1018	2N6084


**DESCRIPTION**

This line of epitaxial silicon NPN planar transistor is designed primarily for VHF mobile and marine transmitters. The device utilizes emitter ballasting resistors and improved metallization systems to achieve extreme ruggedness under severe operating conditions.

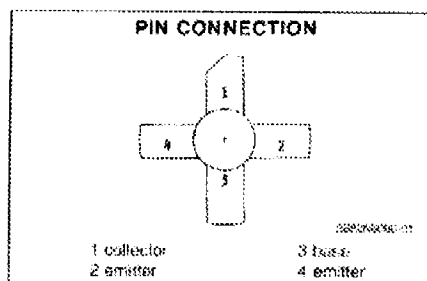

**ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub> = 25°C)**

Symbol	Parameter	Value					Unit
		2N6080	2N6081	2N6082	2N6083	2N6084	
V <sub>CB0</sub>	Collector to Base Voltage	36.0	36.0	36.0	36.0	36.0	V
V <sub>CE0</sub>	Collector to Emitter Voltage	18.0	18.0	18.0	18.0	18.0	V
V <sub>EB0</sub>	Emitter to Base Voltage	4.0	4.0	4.0	4.0	4.0	V
I <sub>C(max)</sub>	Continuous Collector Current	1.0	2.5	4.0	4.0	6.0	A
P <sub>C</sub>	Total Dissipation at 25°C Stud	12.0	31.0	55.0	65.0	80.0	W
T <sub>J</sub>	Junction Temperature	+ 200	+ 200	+ 200	+ 200	+ 200	°C
T <sub>stg</sub>	Storage Temperature	- 65 to + 150	- 65 to + 150	- 65 to + 150	- 65 to + 150	- 65 to + 150	°C



NJ Semi-Conductors reserves the right to change test conditions, parameters limits and package dimensions without notice information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

**Quality Semi-Conductors**

2N6080 → 2N6084

**THERMAL DATA**

Parameter	Symbol	2N6080	2N6081	2N6082	2N6083	2N6084	Unit
Junction-Case Thermal Resist	$R_{\theta(jc)}$	15	5.5	2.8	2.8	2.2	$^{\circ}\text{C/W}$

**ELECTRICAL CHARACTERISTICS** ( $T_{\text{case}} = 25^{\circ}\text{C}$ )

**STATIC**


Symbol	Test Conditions	2N6080			2N6081			2N6082			2N6083			2N6084			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
$B_{\text{open}}$	$I_c = 20\text{mA}, V_{\text{ce}} = 0$	38			36			38			36			36			V
$B_{\text{open}}$	$I_c = 100\text{mA}, I_b = 0$	18			18			18			18			18			V
$B_{\text{open}}$	$I_c = 10\text{mA}, I_b = 0$	4			4			4			4			4			V
$I_{\text{CEO}}$	$V_{\text{ce}} = 15\text{V}, I_b = 0$			0.25			0.5			1			1			2.5	mA
$I_{\text{FE}}$	$V_{\text{ce}} = 5\text{V}, I_b = 0.25\text{A}$	5			5			5			5			5			

**DYNAMIC**

Symbol	Test Conditions	2N6080			2N6081			2N6082			2N6083			2N6084			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
$P_o$	$F = 175\text{MHz}$ $V_{\text{ce}} = 12.5\text{V}$ Class C	4			15			25			30			40			W
$G_r$	$F = 175\text{MHz}$ $V_{\text{ce}} = 12.5\text{V}$ Class C	12			8.3			6.2			5.7			4.5			dB
$\eta_c$	$F = 175\text{MHz}$ $V_{\text{ce}} = 12.5\text{V}$ Class C	50			50			50			50			50			%
$F_r$	$V_{\text{ce}} = 13.6\text{V}$ $I_c = 100\text{mA}$ $F = 100\text{MHz}$	200			200			200			200			200			MHz
$C_{\text{ob}}$	$V_{\text{ce}} = 15\text{V}, I_c = 0$ $F = 1\text{MHz}$			20			85			120			130			280	pF

**APPLICATION INFORMATION** (typical curves) **IMPEDANCE DATA** (typical)

**2N6080**

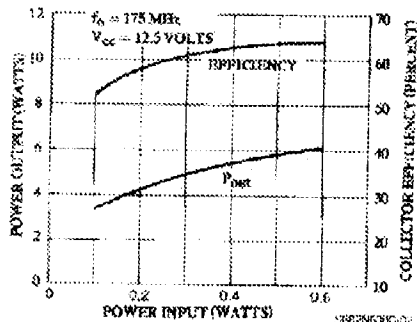

POWER OUT AND EFFICIENCY vs POWER IN

**NETWORK IMPEDANCE AT TRANSISTOR TERMINALS**

$f_o = 175\text{MHz}, V_{\text{ce}} = 12.5\text{V}$			
$P_{\text{in}}$ WATTS	$P_{\text{out}}$ WATTS	INPUT OHMS	OUTPUT OHMS
0.1	3.3	$1.5 + j1.7$	$5.8 + j1.4$
0.3	4.9	$2.2 + j1.3$	$7.6 + j9.8$
0.5	5.8	$2.9 + j0.4$	$8.4 + j5.9$

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.