

## Linear Integrated Circuits

### CA3035, CA3035V1



## Ultra-High-Gain Wide-Band Amplifier Array

### Features:

- Three separate amplifiers - gain and bandwidth for each amplifier can be adjusted with suitable external circuitry
- Amplifiers operable independently or in cascade
- Exceptionally high cascade voltage gain - 129 dB typ. at 40 kHz
- Low noise performance
- Wide-band response
- All amplifiers single-ended - only one power supply required
- Wide operating temperature range -  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

- Built-in temperature compensation
- Hermetically sealed, all-welded 10-lead TO-5 style metal package with straight or formed leads

### Applications:

- Three individual general-purpose amplifiers
- Ideal for service in remote-control amplifiers - e.g., TV receivers
- Available in two electrically identical versions: CA3035 with straight leads; CA3035V1 with formed leads

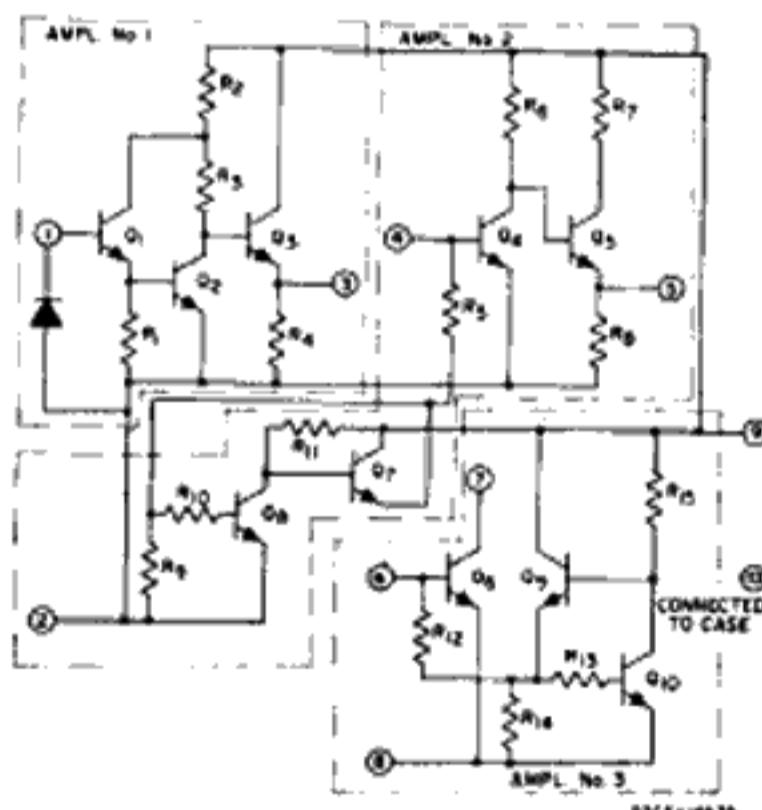


Fig. 1 — Schematic Diagram for CA3035 and CA3035V1

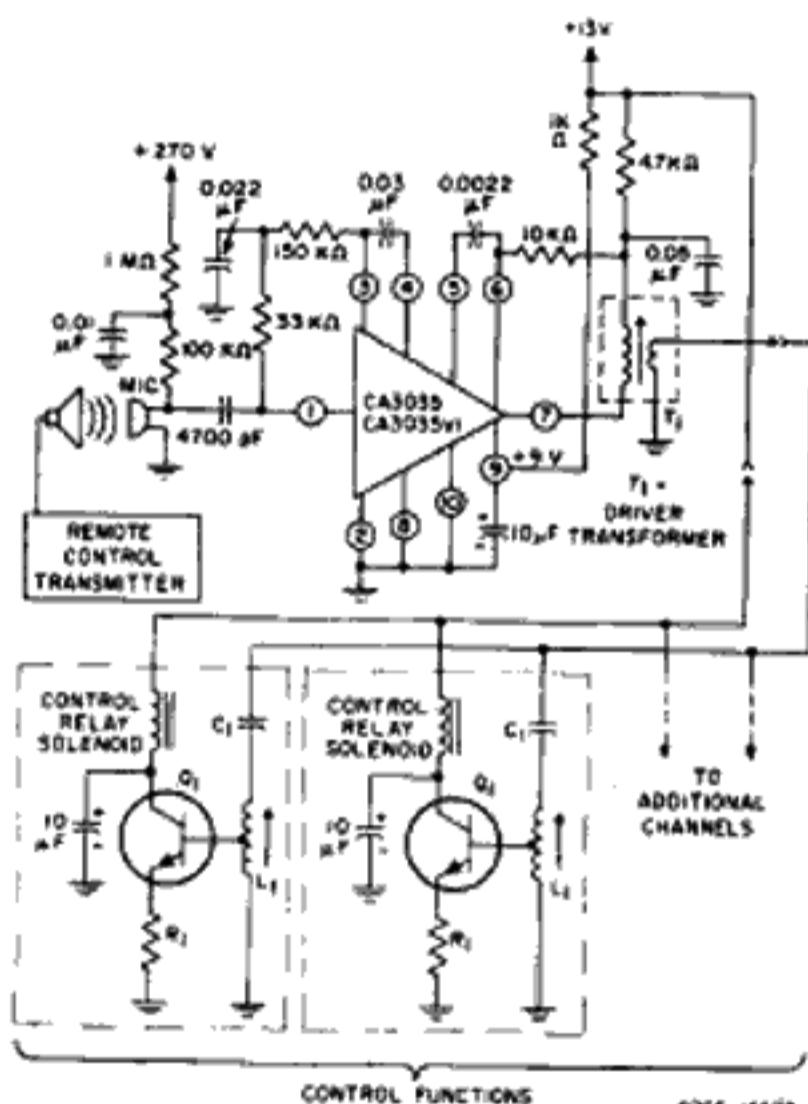


Fig. 2 — Typical Remote Control System

**CA3035, CA3035V1****ABSOLUTE-MAXIMUM RATINGS:**

Operating Temperature Range	-55°C to +125°C
Storage Temperature Range	-65°C to +200°C
Device Dissipation	300 mW
Input Voltage	1 V p-p
Supply Voltage	+15V

**ELECTRICAL CHARACTERISTICS AT  $T_A = 25^\circ\text{C}$** 


CHARACTERISTICS	SYMBOLS	SPECIAL TEST CONDITIONS	TEST CIRCUITS AND CHARACTERISTICS CURVES	LIMITS			UNITS	
				CA3035, CA3035V1				
				Min.	Typ.	Max.		
<b>STATIC CHARACTERISTICS</b>								
Quiescent Operating Voltage	$V_3$ $V_5$ $V_7$	$V_{CC} = +9V$	Fig.5	-	2 1.9 4.9	-	V	
Total Current Drain	$I_d$	$V_{CC} = +9V$ , $R_{L3} = 5K\Omega$	Fig.3	3.5	5	7.5	mA	
<b>DYNAMIC CHARACTERISTICS</b>								
Voltage Gain: Amplifier No.1 Amplifier No.2 Amplifier No.3	$A_1$ $A_2$ $A_3$	$f = 40 \text{ kHz}$ , $V_{CC} = +9V$		40 40 38	44 46 42	-	dB	
Output Voltage Swing	$V_{out}$ $V_{1out}$ $V_{2out}$ $V_{3out}$	$R_{L1} = 10K\Omega$ $R_{L2} = 10K\Omega$ $R_{L3} = 5K\Omega$ Sinusoidal Output, $V_{CC} = +9V$		-	2 2.6 8	-	Vp-p Vp-p Vp-p	
Input Resistance: Amplifier No.1 Amplifier No.2 Amplifier No.3	$R_{1in}$ $R_{2in}$ $R_{3in}$	$f = 40 \text{ kHz}$		-	50K 2K 670	-	$\Omega$	
Output Resistance	$R_{1out}$ $R_{2out}$ $R_{3out}$	$f = 40 \text{ kHz}$		-	270 170 100K	-	$\Omega$	
Bandwidth at -3dB point: Amplifier No.1 Amplifier No.2 Amplifier No.3	$BW_1$ $BW_2$ $BW_3$	$V_{CC} = +9V$	Fig.5 Fig.6 Fig.7	-	500 2.5 2.5	-	kHz MHz MHz	
Noise Figure Amplifier No.1	$NF_1$	$f = 1 \text{ kHz}$ , $R_S = 1K\Omega$	Fig.4	-	6	7	dB	
Sensitivity		$V_{CC} = +13V$ Relay $1K_1$ Current = 7.5 mA	Fig.2	-	100	150	$\mu\text{V}$	

# Linear Integrated Circuits

## CA3035, CA3035V1

### STATIC CHARACTERISTICS


#### TEST CIRCUIT

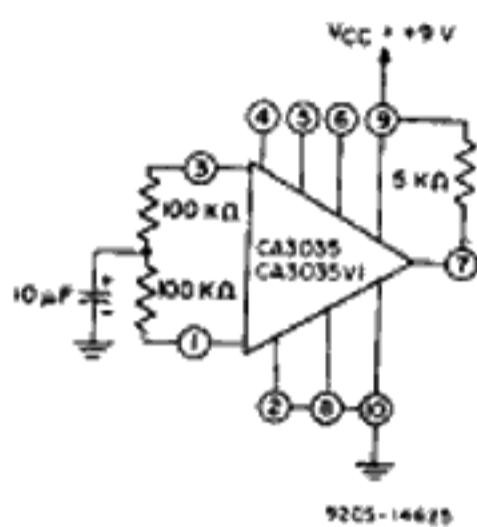

92CS-14625

Fig.3


### TYPICAL 1st-AMPLIFIER RESPONSE

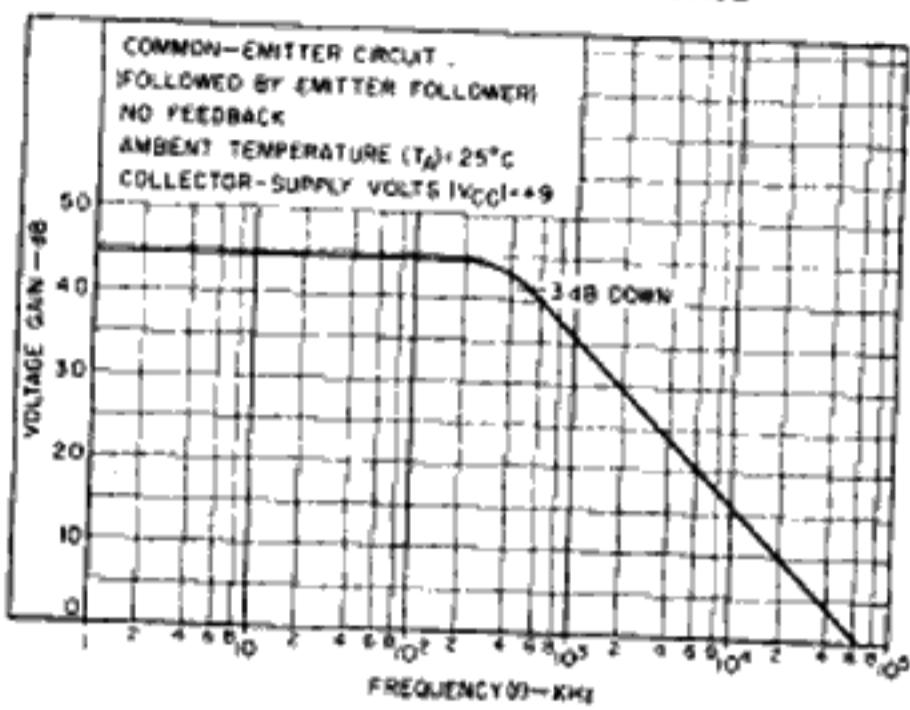

92CS-14625

Fig.5


### TYPICAL 2nd-AMPLIFIER RESPONSE

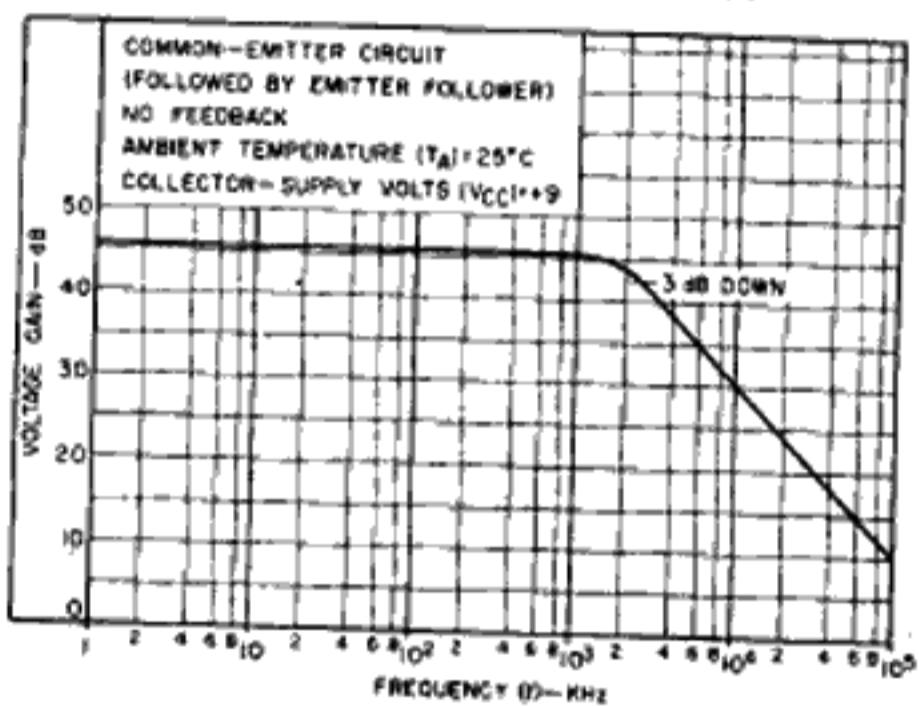

92CS-14634

Fig.6

### TYPICAL 3rd-AMPLIFIER RESPONSE

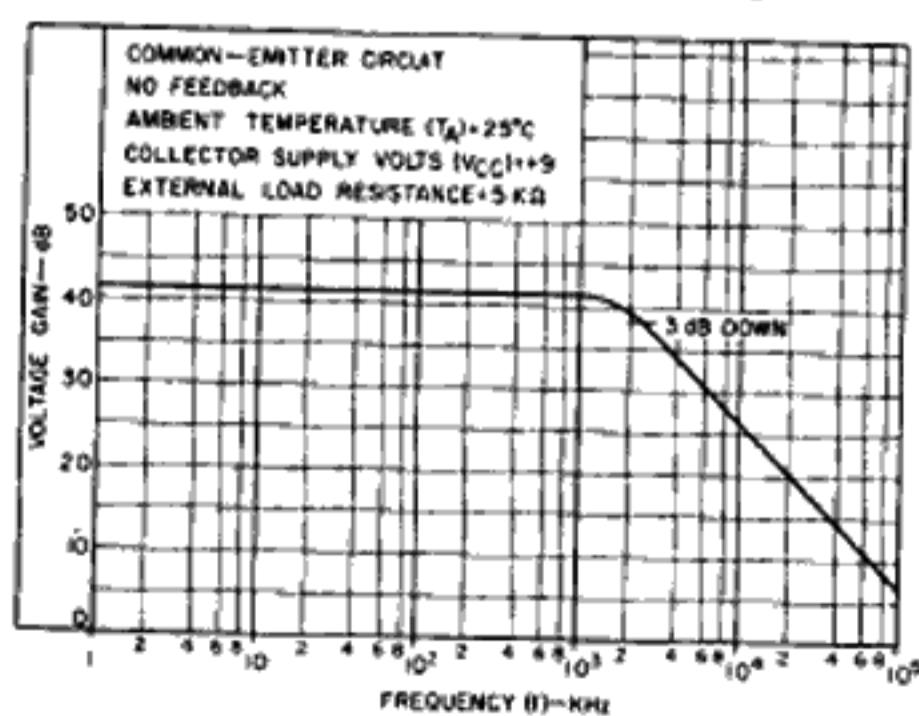

92CS-14637

Fig.7

NOTE: SET ALL INTERNAL POWER SUPPLIES ON QUAN TECH NOISE ANALYZER TO ZERO VOLTS.

Fig.4