

# International **IR** Rectifier

## IRS20124(S)PbF

### Digital Audio Driver with Discrete Deadtime and Protection

#### Features

- 200 V high voltage ratings deliver up to 1000 W output power in Class D audio amplifier applications
- Integrated deadtime generation and bi-directional over-current sensing simplify design
- Programmable compensated preset deadtime for improved THD performances over temperature
- High noise immunity
- Shutdown function protects devices from overload conditions
- Operates up to 1 MHz
- 3.3 V/5 V logic compatible input
- RoHS compliant

#### Product Summary

V<sub>SUPPLY</sub> 200 V max.

I<sub>O+/-</sub> 1 A / 1.2 A typ.

Selectable Deadtime  
15 ns, 25 ns, 35 ns, 45 ns typ.

Prop Delay Time 60 ns typ.


Bi-Directional Over-  
Current Sensing

#### Package



14-Lead SOIC

#### Typical Application Diagram

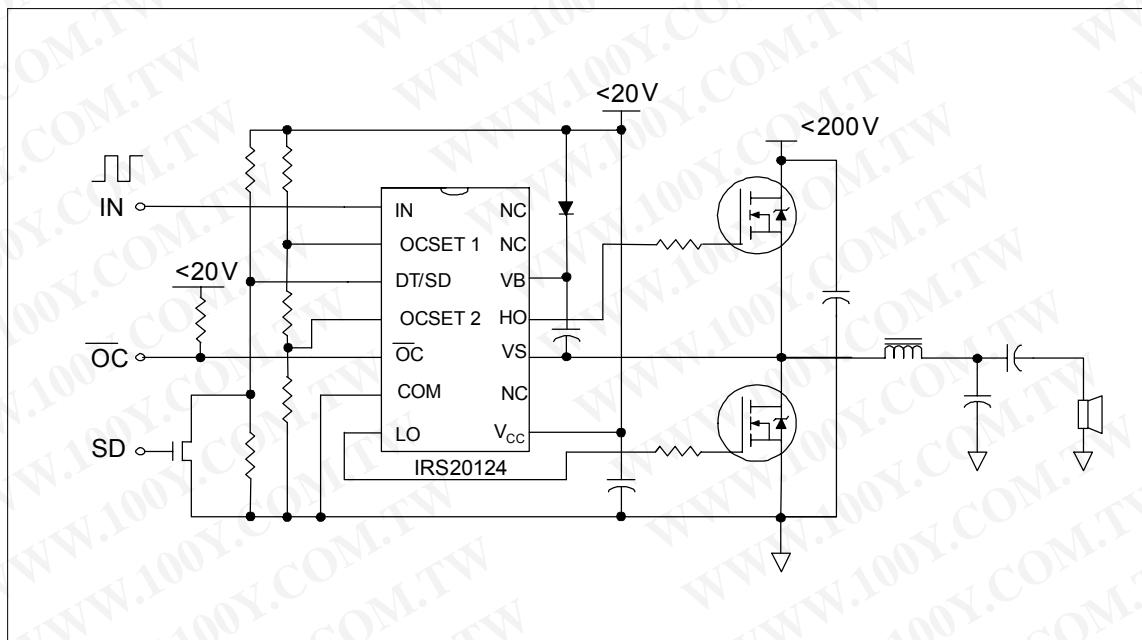

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

### Description

The IRS20124 is a high voltage, high speed power MOSFET driver with internal deadtime and shutdown functions specially designed for Class D audio amplifier applications.

The internal dead time generation block provides accurate gate switch timing and enables tight deadtime settings for better THD performances.

In order to maximize other audio performance characteristics, all switching times are designed for immunity from external disturbances such as  $V_{CC}$  perturbation and incoming switching noise on the DT pin. Logic inputs are compatible with LSTTL output or standard CMOS down to 3.0 V without speed degradation. The output drivers feature high current buffers capable of sourcing 1.0 A and sinking 1.2 A. Internal delays are optimized to achieve minimal deadtime variations. Proprietary HVIC and latch immune CMOS technologies guarantee operation down to  $V_S = -4$  V, providing outstanding capabilities of latch and surge immunities with rugged monolithic construction.

### Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. All currents are defined positive into any lead. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units
$V_B$	High-side floating supply voltage	-0.3	220	V
$V_S$	High-side floating supply voltage	$V_B-20$	$V_B+0.3$	
$V_{HO}$	High-side floating output voltage	$V_S-0.3$	$V_B+0.3$	
$V_{CC}$	Low-side fixed supply voltage	-0.3	20	
$V_{LO}$	Low-side output voltage	-0.3	$V_{CC}+0.3$	
$V_{IN}$	Input voltage	-0.3	$V_{CC}+0.3$	
$V_{OC}$	OC pin input voltage	-0.3	$V_{CC}+0.3$	
$V_{OCSET1}$	OCSET1 pin input voltage	-0.3	$V_{CC}+0.3$	
$V_{OCSET2}$	OCSET2 pin input voltage	-0.3	$V_{CC}+0.3$	
$dV_S/dt$	Allowable $V_S$ voltage slew rate	-	50	V/ns
$P_D$	Maximum power dissipation	-	1.25	W
$R_{thJA}$	Thermal resistance, junction to ambient	-	100	°C/W
$T_J$	Junction temperature	-	150	°C
$T_S$	Storage temperature	-55	150	
$T_L$	Lead temperature (soldering, 10 seconds)	-	300	

勝特力材料 886-3-5753170  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## IRS20124S(PbF)

### Recommended Operating Conditions

For proper operation, the device should be used within the recommended conditions. The Vs and COM offset ratings are tested with all supplies biased at a 15 V differential.

Symbol	Definition	Min.	Max.	Units
$V_B$	High-side floating supply absolute voltage	$V_S+10$	$V_S+18$	V
$V_S$	High-side floating supply offset voltage	Note 1	200	
$V_{HO}$	High-side floating output voltage	$V_S$	$V_B$	
$V_{CC}$	Low-side fixed supply voltage	10	18	
$V_{LO}$	Low-side output voltage	0	$V_{CC}$	
$V_{IN}$	Logic input voltage	0	$V_{CC}$	
$V_{OC}$	OC pin input voltage	0	$V_{CC}$	
$V_{OCSET1}$	OCSET1 pin input voltage	0	$V_{CC}$	
$V_{OCSET2}$	OCSET2 pin input voltage	0	$V_{CC}$	
$T_A$	Ambient Temperature	-40	125	°C

**Note 1:** Logic operational for  $V_S$  equal to -8 V to 200 V. Logic state held for  $V_S$  equal to -8 V to  $-V_{BS}$ .

### Dynamic Electrical Characteristics

$V_{BIAS}$  ( $V_{CC}$ ,  $V_{BS}$ ) = 15 V,  $C_L = 1n\text{ F}$  and  $T_A = 25^\circ\text{C}$  unless otherwise specified. Fig. 2 shows the timing definitions.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
$t_{on}$	High & low-side turn-on propagation delay	—	60	80	ns	$V_S=0\text{ V}$
$t_{off}$	High & low-side turn-off propagation delay	—	60	80		$V_S=200\text{ V}$
$t_r$	Turn-on rise time	—	25	40		
$t_f$	Turn-off fall time	—	15	35		
$t_{sd}$	Shutdown propagation delay	—	140	200		
$t_{oc}$	Propagation delay time from $V_S > V_{soc^+}$ to OC	—	280	—		$OC_{SET1}=3.22\text{ V}$ $OC_{SET2}=1.20\text{ V}$
$t_{woc min}$	OC pulse width	—	100	—		
$t_{oc filt}$	OC input filter time	—	200	—		
DT1	Deadtime: LO turn-off to HO turn-on ( $DT_{LO-HO}$ ) & HO turn-off to LO turn-on ( $DT_{HO-LO}$ )	0	15	40		$V_{DT} > V_{DT1}$
DT2	Deadtime: LO turn-off to HO turn-on ( $DT_{LO-HO}$ ) & HO turn-off to LO turn-on ( $DT_{HO-LO}$ )	5	25	50		$V_{DT1} > V_{DT} > V_{DT2}$
DT3	Deadtime: LO turn-off to HO turn-on ( $DT_{LO-HO}$ ) & HO turn-off to LO turn-on ( $DT_{HO-LO}$ )	10	35	60		$V_{DT2} > V_{DT} > V_{DT3}$
DT4	Deadtime: LO turn-off to HO turn-on ( $DT_{LO-HO}$ ) & HO turn-off to LO turn-on ( $DT_{HO-LO}$ ) $V_{DT} = V_{DT4}$	15	45	70		$V_{DT3} > V_{DT} > V_{DT4}$

### Static Electrical Characteristics

$V_{BIAS}$  ( $V_{CC}$ ,  $V_{BS}$ ) = 15 V and  $T_A$  = 25 °C unless otherwise specified.


Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
$V_{IH}$	Logic high input voltage	2.5	—	—	V	$V_{CC}=10\text{ V}-20\text{ V}$
$V_{IL}$	Logic low input voltage	—	—	1.2		
$V_{OH}$	High level output voltage, $V_{BIAS} - V_O$	—	—	1.2		
$V_{OL}$	Low level output voltage, $V_O$	—	—	0.1		$I_O=0\text{ A}$
$UV_{CC+}$	$V_{CC}$ supply UVLO positive threshold	8.3	9.0	9.7		
$UV_{CC-}$	$V_{CC}$ supply UVLO negative threshold	7.5	8.2	8.9		
$UV_{BS+}$	High-side well UVLO positive threshold	8.3	9.0	9.7		
$UV_{BS-}$	High-side well UVLO negative threshold	7.5	8.2	8.9		
$I_{QBS}$	High-side quiescent current	—	—	1		
$I_{QCC}$	Low-side quiescent current	—	—	4		$V_{DT}=V_{CC}$
$I_{LK}$	High-to-low-side leakage current	—	—	50	$\mu\text{A}$	$V_B=V_S=200\text{ V}$
$I_{IN+}$	Logic "1" input bias current	—	3	10		$V_{IN}=3.3\text{ V}$
$I_{IN-}$	Logic "0" input bias current	—	0	1.0		$V_{IN}=0\text{ V}$
$I_{o+}$	Output high short circuit current (source)	—	1.0	—		$V_O=0\text{ V}, PW<10\text{ }\mu\text{s}$
$I_{o-}$	Output low short circuit current (sink)	—	1.2	—		$V_O=15\text{ V}, PW<10\text{ }\mu\text{s}$
$V_{DT1}$	DT mode select threshold 1	0.8( $V_{CC}$ )	0.89( $V_{CC}$ )	0.97( $V_{CC}$ )	V	
$V_{DT2}$	DT mode select threshold 2	0.51( $V_{CC}$ )	0.57( $V_{CC}$ )	0.63( $V_{CC}$ )		
$V_{DT3}$	DT mode select threshold 3	0.32( $V_{CC}$ )	0.36( $V_{CC}$ )	0.40( $V_{CC}$ )		
$V_{DT4}$	DT mode select threshold 4	0.21( $V_{CC}$ )	0.23( $V_{CC}$ )	0.25( $V_{CC}$ )		
$V_{SOC+}$	OC threshold in $V_S$	0.75	1.0	1.25		$OCSET1=3.22\text{ V}$ $OCSET2=1.20\text{ V}$
$V_{SOC-}$	OC threshold in $V_S$	-1.25	-1.0	-0.75		$OCSET1=3.22\text{ V}$ $OCSET2=1.20\text{ V}$

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## IRS20124S(PbF)

### Lead Definitions

Symbol	Description
VCC	Low-side logic supply voltage
VB	High-side floating supply
HO	High-side output
VS	High-side floating supply return
IN	Logic input for high-side and low-side gate driver outputs (HO and LO), in phase with HO
DT/SD	Input for programmable deadtime, referenced to COM. shutdown LO and HO when tied to COM
COM	Low-side supply return
LO	Low-side output
OC	Over-current output (negative logic)
OC <sub>SET1</sub>	Input for setting negative over current threshold
OC <sub>SET2</sub>	Input for setting positive over current threshold

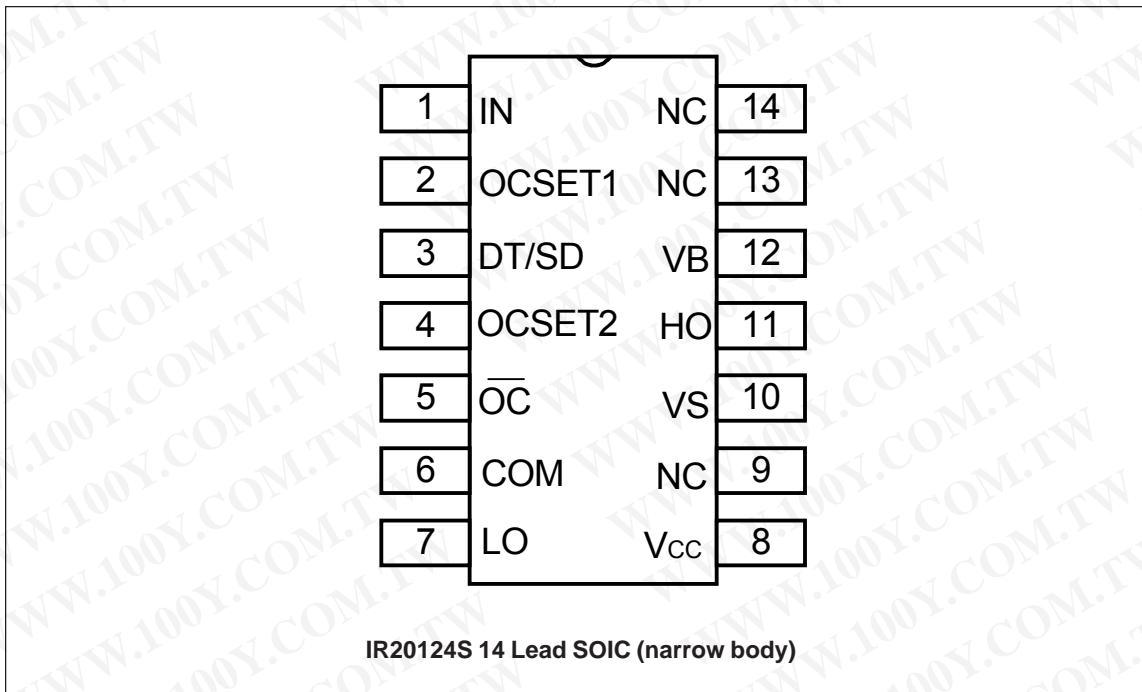


International  
**IR** Rectifier

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## IRS20124S(PbF)

### Block Diagram

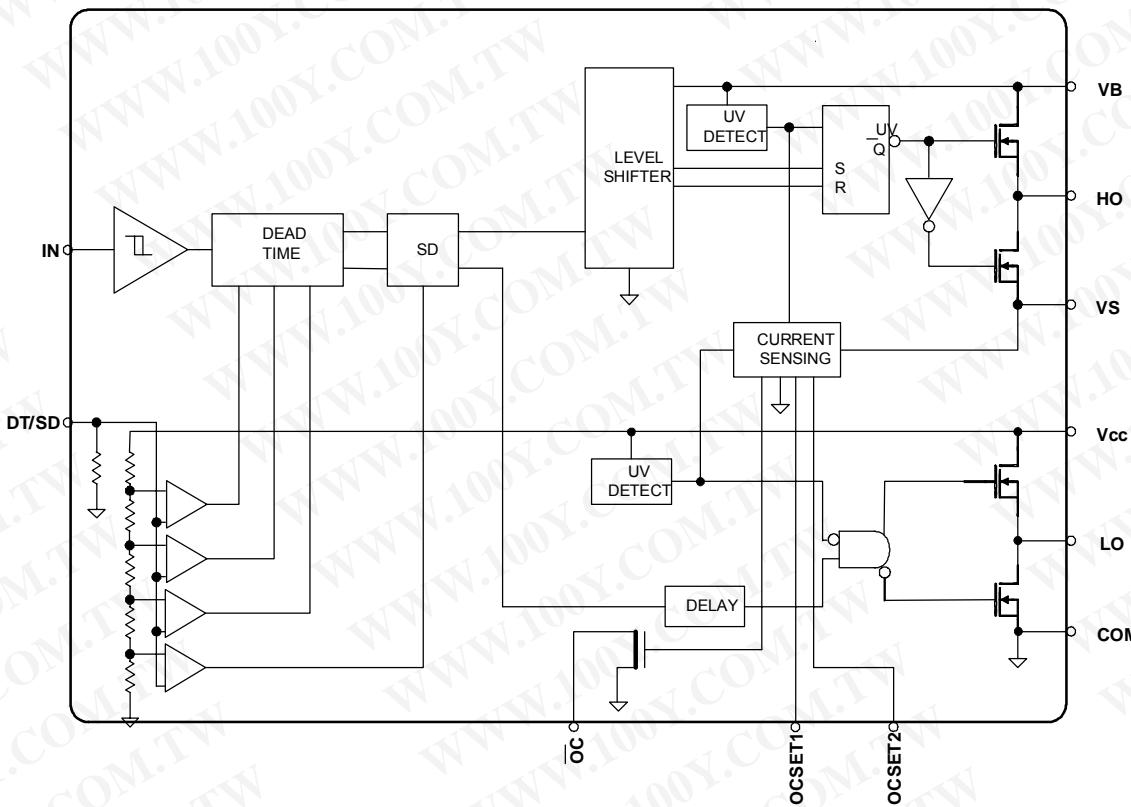

International  
**IR** Rectifier

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## IRS20124S(PbF)

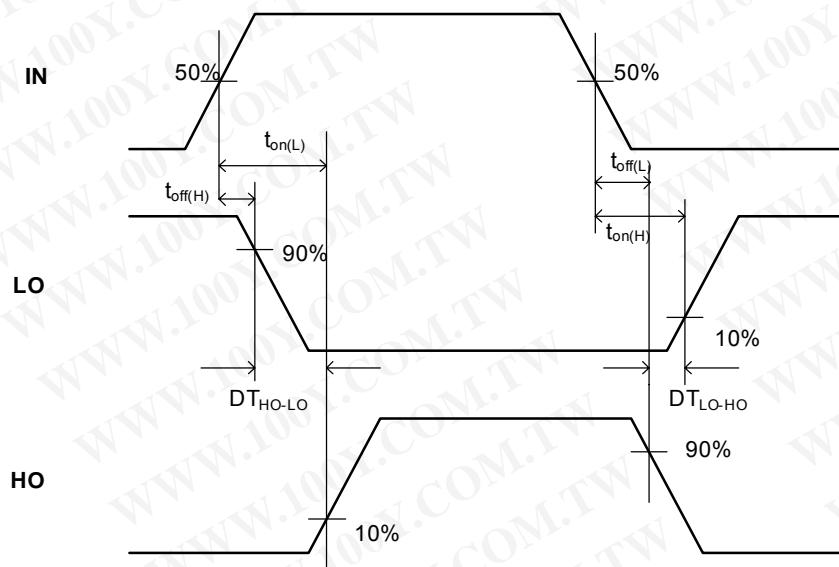


Figure 1. Switching Time Waveform Definitions

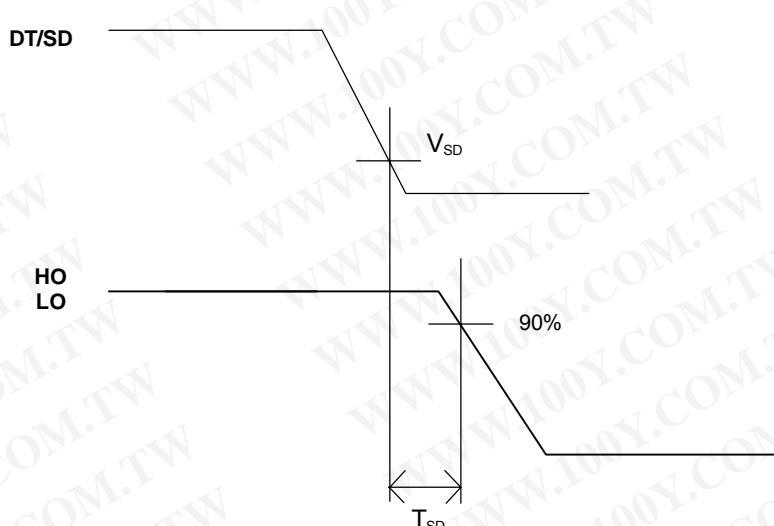


Figure 2. Shutdown Waveform Definitions

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

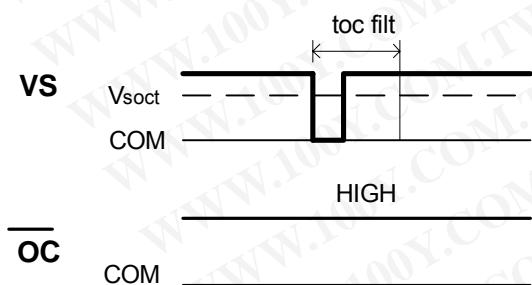


Figure 3. OC Input FilterTime Definitions

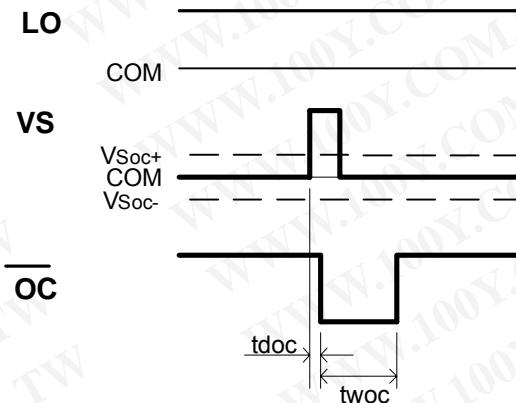


Figure 4. OC Waveform Definitions

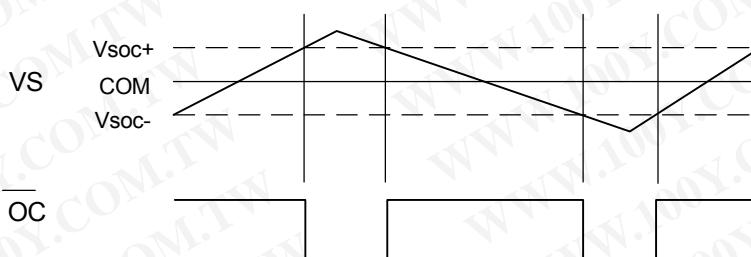
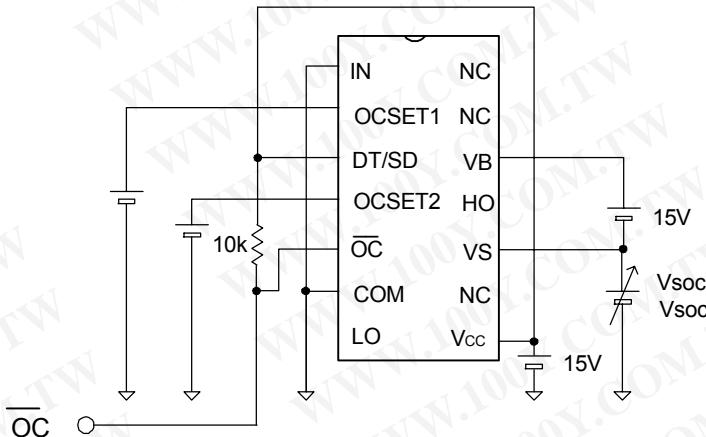


Figure 5. OC Waveform Definitions

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

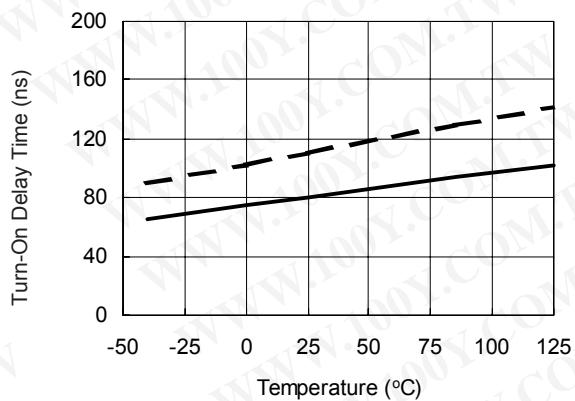


Figure 6A. Turn-On Time  
vs. Temperature

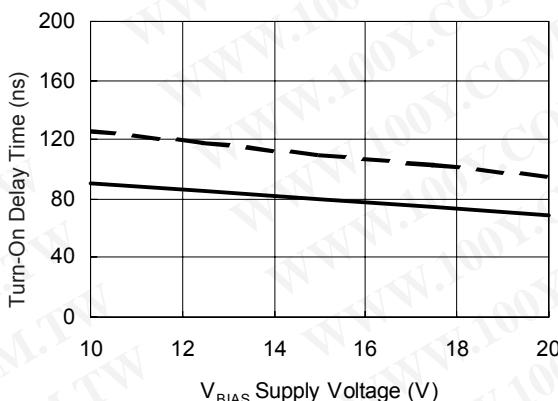


Figure 6B. Turn-On Time  
vs. Supply Voltage

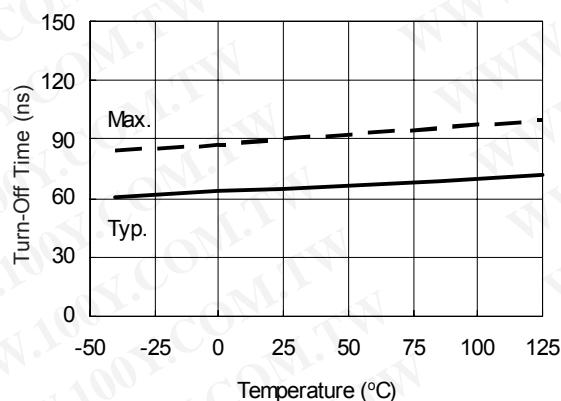


Figure 7A. Turn-Off Time  
vs. Temperature

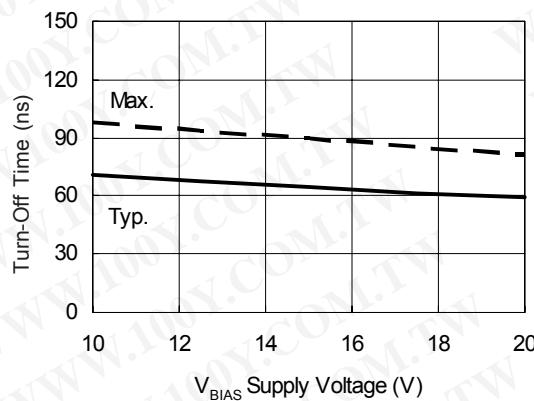


Figure 7B. Turn-Off Time  
vs. Supply Voltage

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

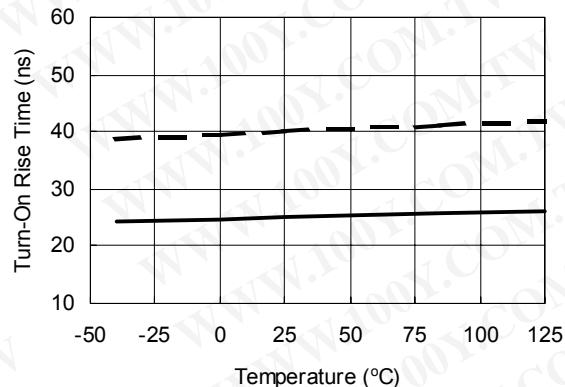


Figure 8A. Turn-On Rise Time  
vs. Temperature

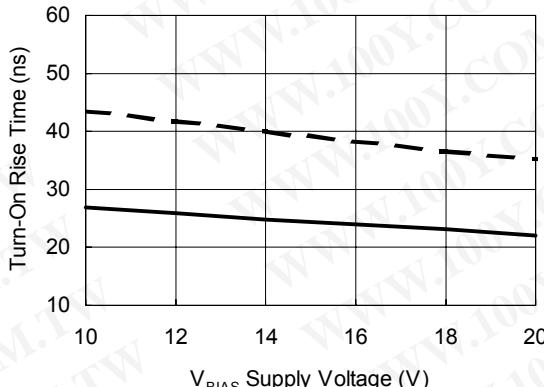


Figure 8B. Turn-On Rise Time  
vs. Supply Voltage

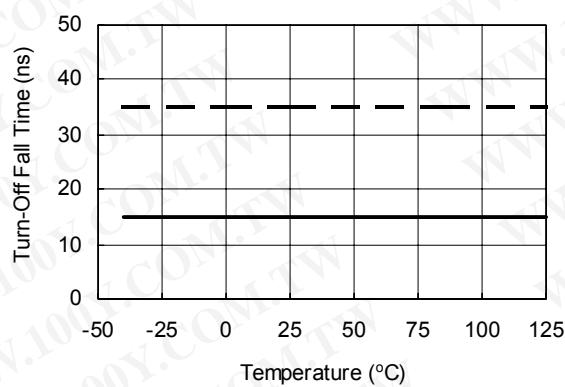


Figure 9A. Turn-Off Fall Time  
vs. Temperature

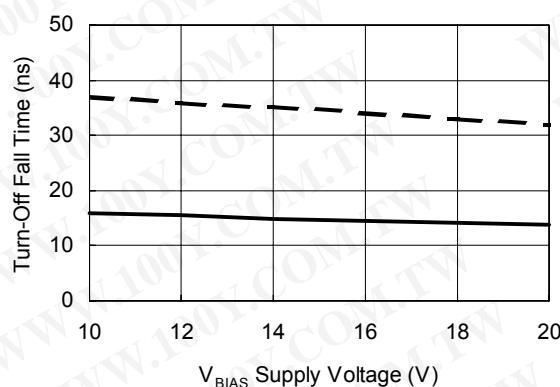


Figure 9B. Turn-Off Fall Time  
vs. Supply Voltage

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

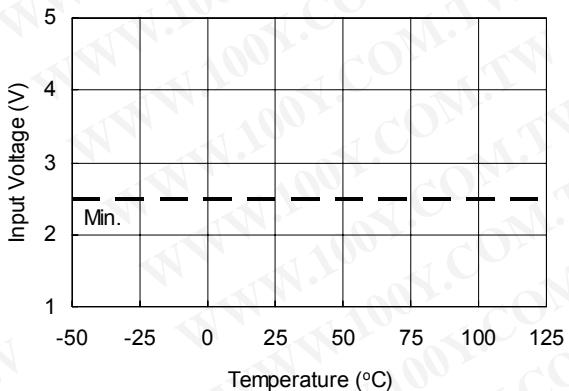


Figure 10A. Logic "1" Input Voltage vs. Temperature

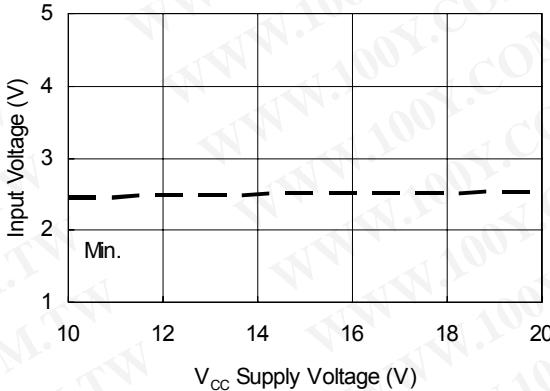


Figure 10B. Logic "1" Input Voltage vs. Supply Voltage

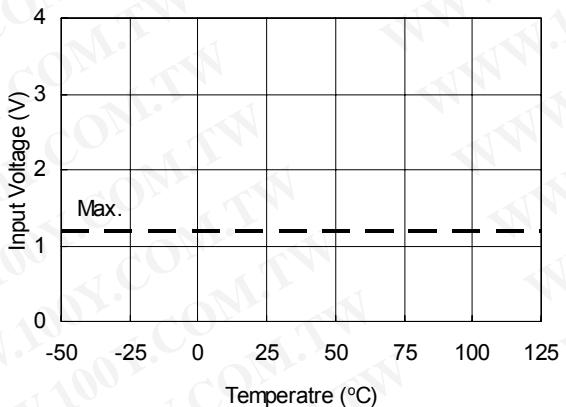


Figure 11A. Logic "0" Input Voltage vs. Temperature

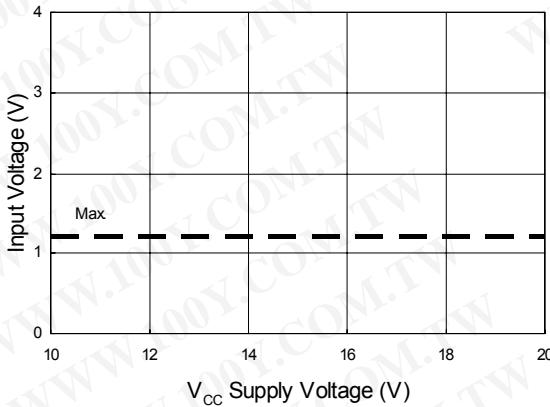


Figure 11B. Logic "0" Input Voltage vs. Supply Voltage

International  
**IR** Rectifier

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## IRS20124S(PbF)

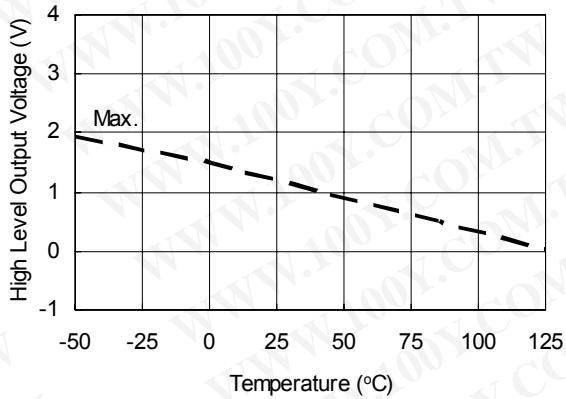


Figure 12A. High Level Output  
vs. Temperature

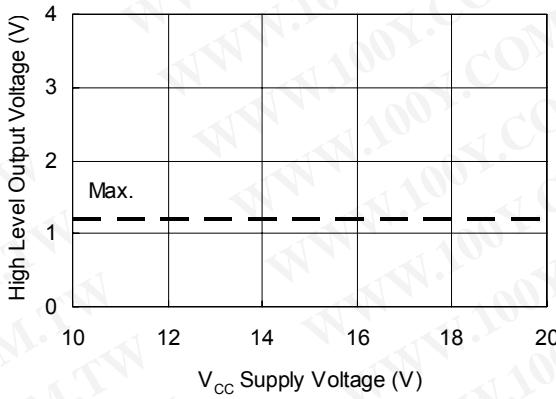


Figure 12B. High Level Output  
vs. Supply Voltage

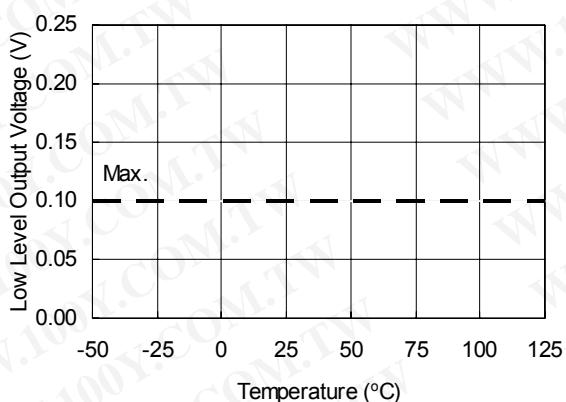


Figure 13A. Low Level Output  
vs. Temperature

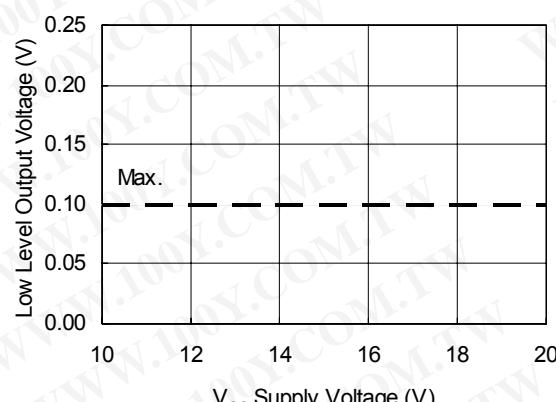


Figure 13B. Low Level Output  
vs. Supply Voltage

勝特力材料 886-3-5753170  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

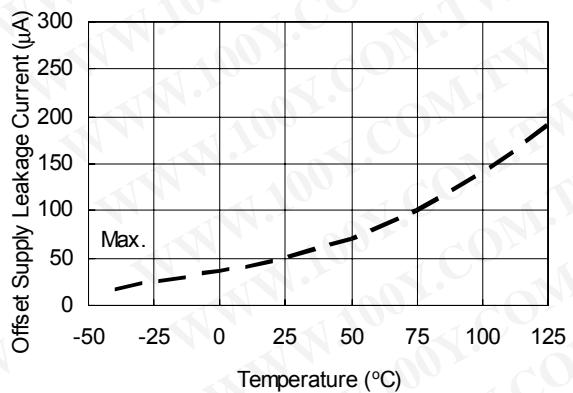


Figure 14A. Offset Supply Leakage Current vs. Temperature  $V_B = 200$  V

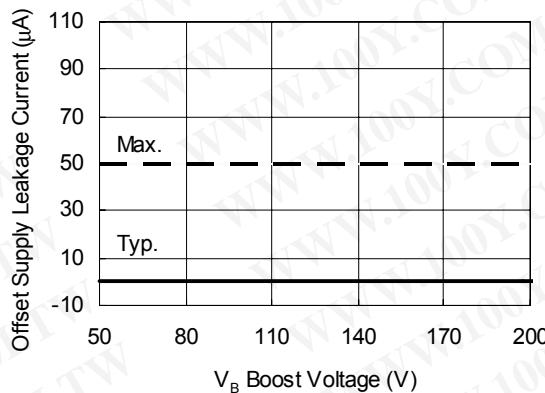


Figure 14B. Offset Supply Leakage Current vs. Supply Voltage

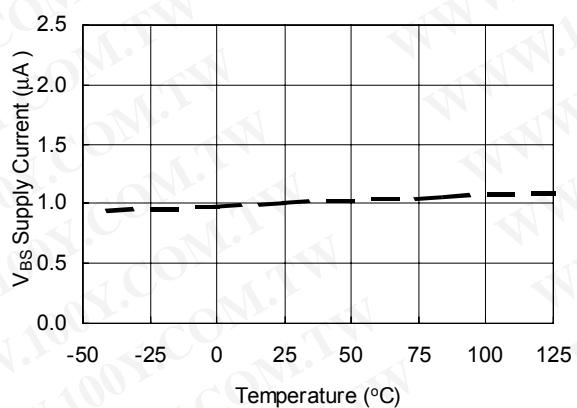


Figure 15A.  $V_{BS}$  Supply Current vs. Temperature

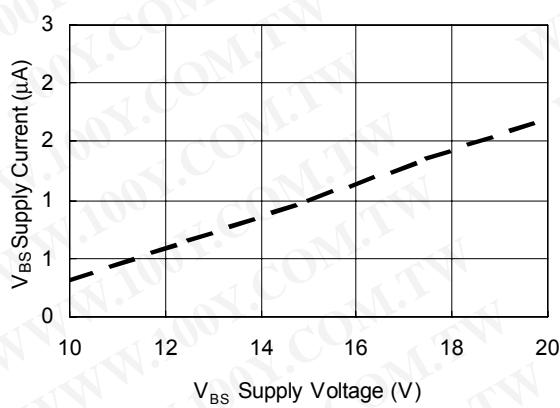


Figure 15B.  $V_{BS}$  Supply Current vs. Supply Voltage

## IRS20124S(PbF)

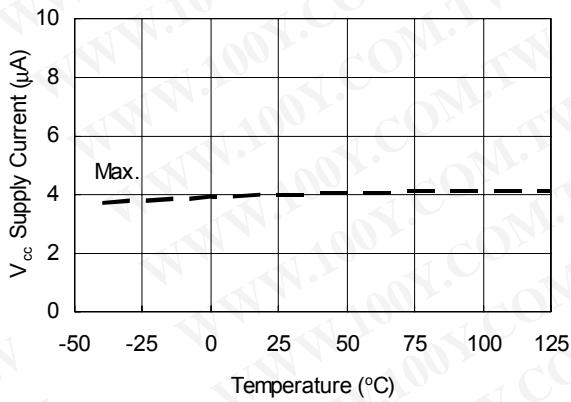


Figure 16A.  $V_{CC}$  Supply Current vs. Temperature

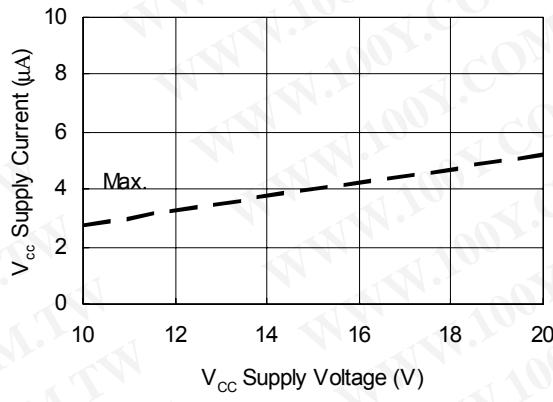


Figure 16B.  $V_{CC}$  Supply Current vs. Supply Voltage

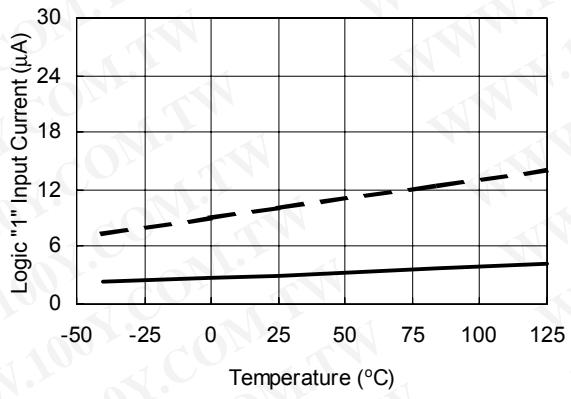


Figure 17A. Logic "1" Input Current vs. Temperature

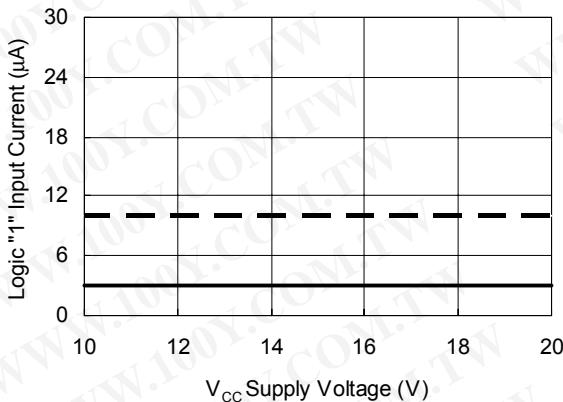


Figure 17B. Logic "1" Input Current vs. Supply Voltage

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

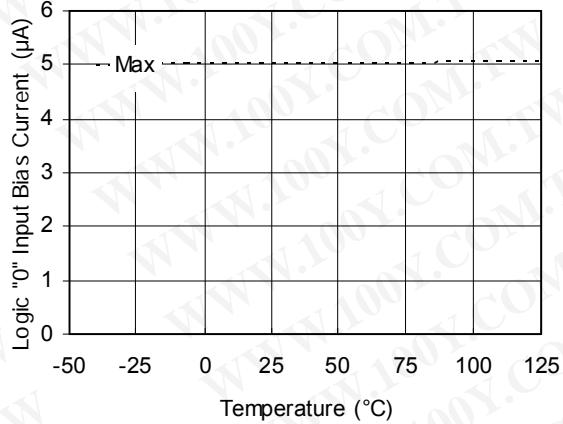


Figure 18A. Logic "0" Input Bias Current vs. Temperature

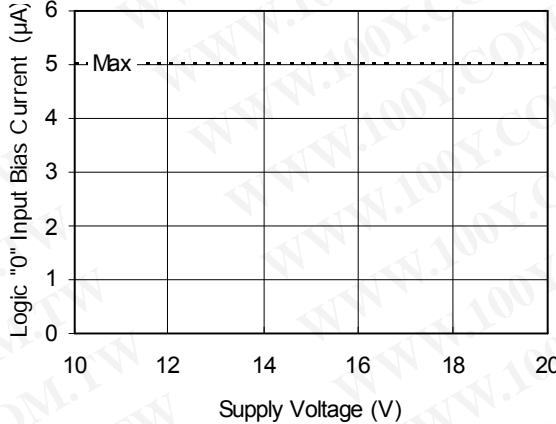


Figure 18B. Logic "0" Input Bias Current vs. Voltage

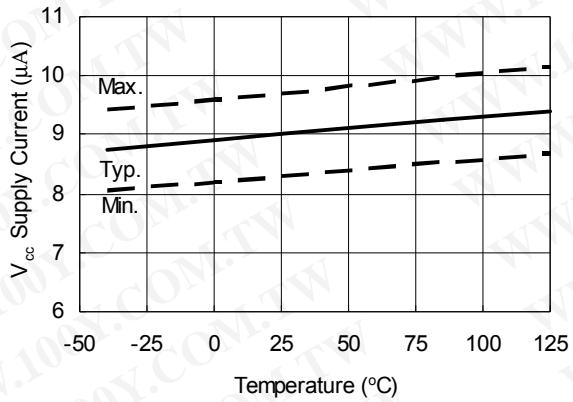


Figure 19.  $V_{cc}$  Undervoltage Threshold (+) vs. Temperature

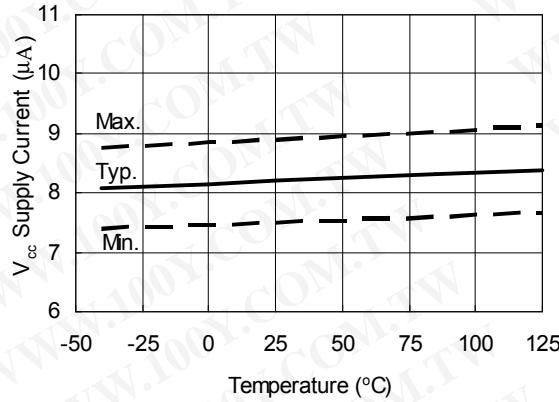


Figure 20.  $V_{cc}$  Undervoltage Threshold (-) vs. Temperature

## IRS20124S(PbF)

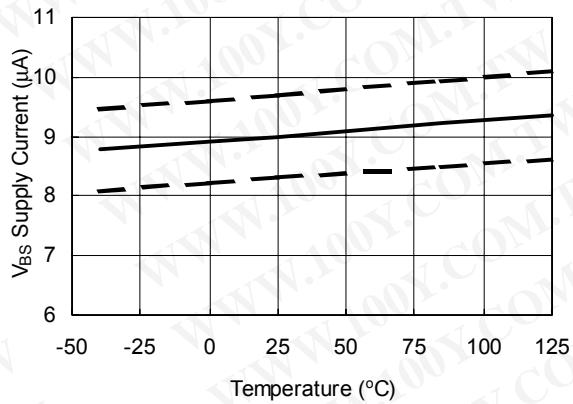


Figure 21.  $V_{BS}$  Undervoltage Threshold (+)  
vs. Temperature

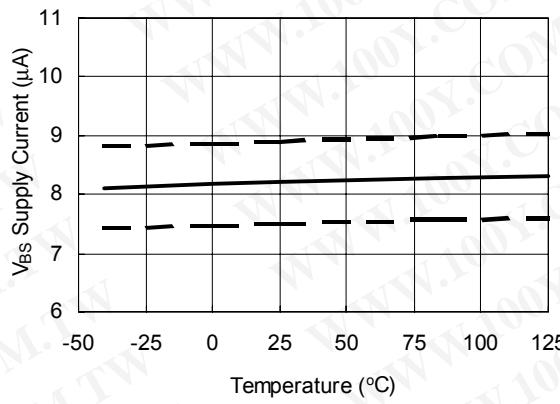


Figure 22.  $V_{BS}$  Undervoltage Threshold (-)  
vs. Temperature

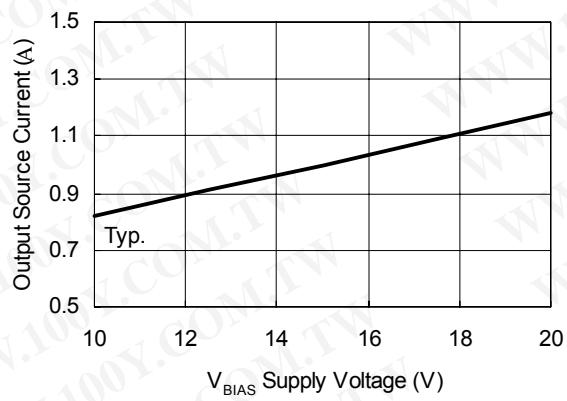


Figure 23. Output Source Current  
vs. Supply Voltage

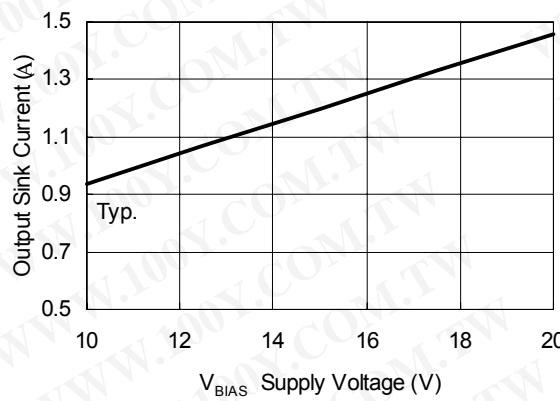


Figure 24. Output Sink Current  
vs. Supply Voltage

International  
**IR** Rectifier

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## IRS20124S(PbF)

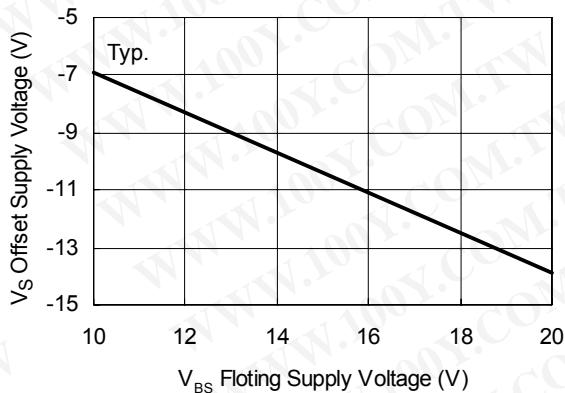


Figure 25. Maximum  $V_S$  Negative Offset vs. Supply Voltage

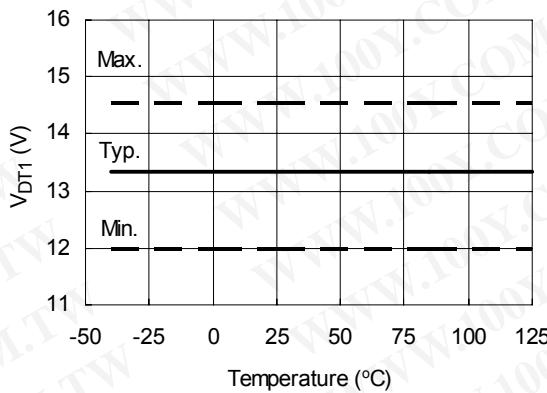


Figure 26. DT Mode Select Threshold (1) vs. Temperature

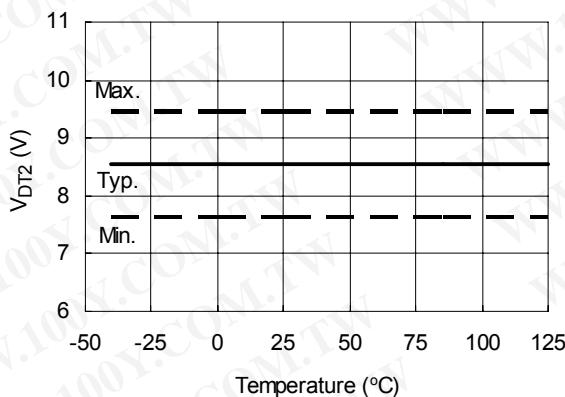


Figure 27. DT Mode Select Threshold (2) vs. Temperature

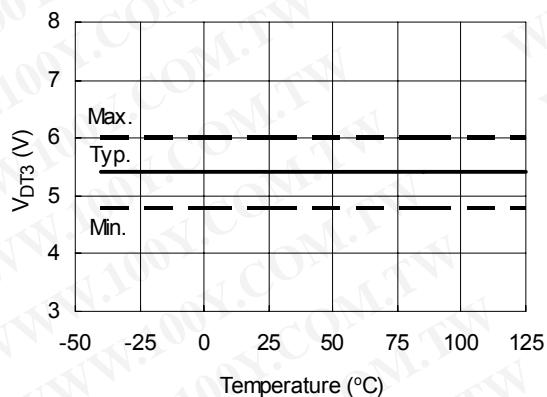


Figure 28. DT Mode Select Threshold (3) vs. Temperature

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

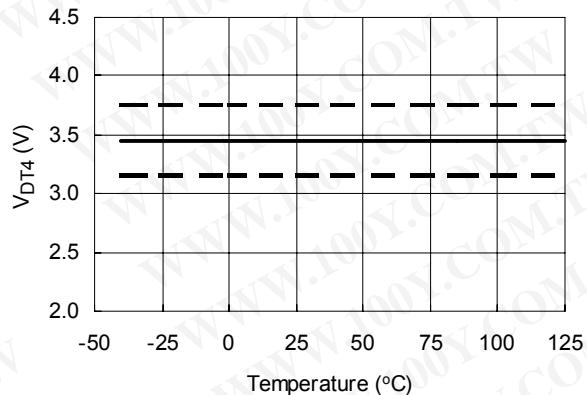


Figure 29. DT Mode Select Threshold (4)  
vs. Temperature

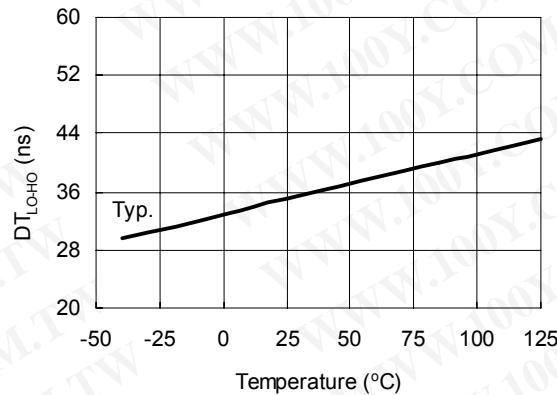


Figure 30. DT LO Turn-Off to HO TurnOn (3)  
vs. Temperature

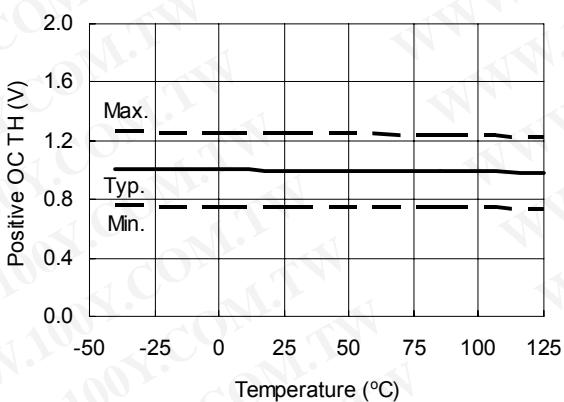


Figure 31. Positive OC Threshold(+) in Vs  
vs. Temperature

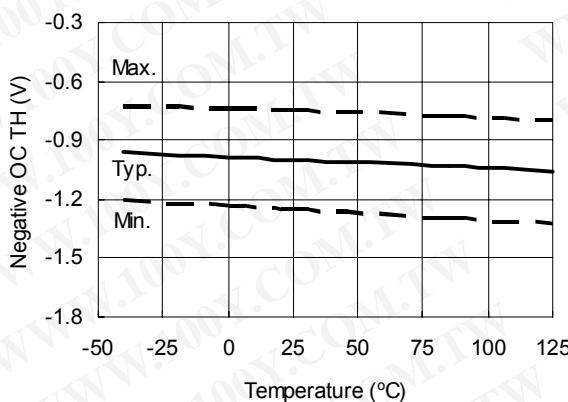


Figure 32. Negative OC Threshold(-) in Vs  
vs. Temperature

## IRS20124S(PbF)

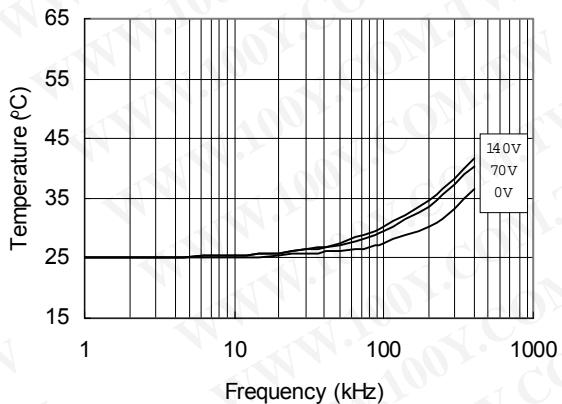


Figure 33. IRS20124S vs. Frequency (IRFBC20)  
 $R_{gate} = 33 \Omega$ ,  $V_{cc} = 12 V$

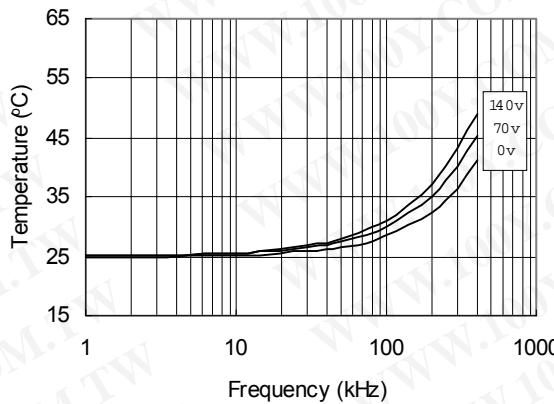


Figure 34. IRS20124S vs. Frequency (IRFBC30)  
 $R_{gate} = 22 \Omega$ ,  $V_{cc} = 12 V$

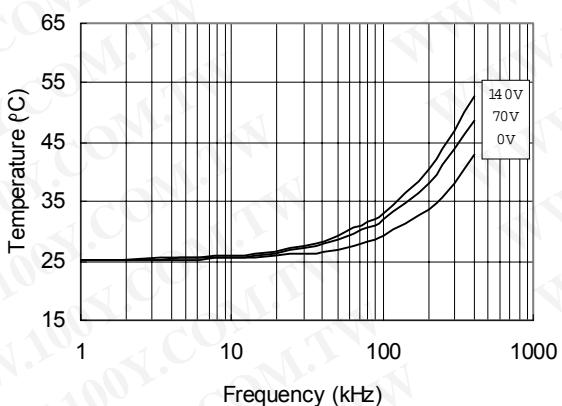


Figure 35. IRS20124S vs. Frequency (IRFBC40)  
 $R_{gate} = 15 \Omega$ ,  $V_{cc} = 12 V$

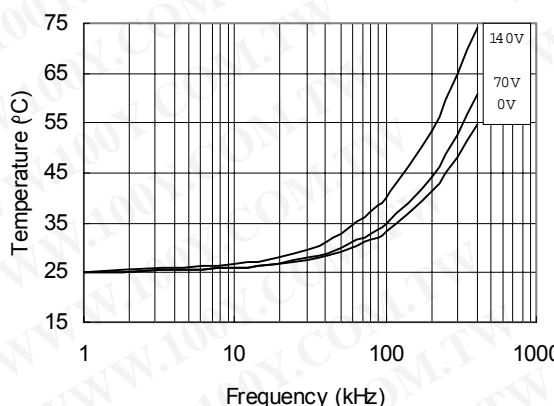


Figure 36. IRS20124S vs. Frequency (IRFPE50)  
 $R_{gate} = 10 \Omega$ ,  $V_{cc} = 12 V$

# IRS20124S(PbF)

## Functional description


### Programmable Dead-time

The IRS20124 has an internal deadtime generation block to reduce the number of external components in the output stage of a Class D audio amplifier. Selectable deadtime through the DT/SD pin voltage is an easy and reliable function, which requires only two external resistors. The deadtime generation block is also designed to provide a constant deadtime interval, independent of V<sub>cc</sub> fluctuations. Since the timings are critical to the audio performance of a Class D audio amplifier, the unique internal deadtime generation block is designed to be immune to noise on the DT/SD pin and the V<sub>cc</sub> pin. Noise-free programmable deadtime function is available by selecting deadtime from four preset values, which are optimized and compensated.

### How to Determine Optimal Deadtime

Please note that the effective deadtime in an actual application differs from the deadtime specified in this datasheet due to finite fall time, t<sub>f</sub>. The deadtime value in this datasheet is defined as the time period from the starting point of turn-off on one side of the switching stage to the starting point of turn-on on the other side as shown in Fig. 5. The fall time of MOSFET gate voltage must be subtracted from the deadtime value in the datasheet to determine the effective dead time of a Class D audio amplifier.

$$\begin{aligned} & \text{(Effective deadtime)} \\ &= \text{(Deadtime in datasheet)} - (\text{fall time, } t_f) \end{aligned}$$

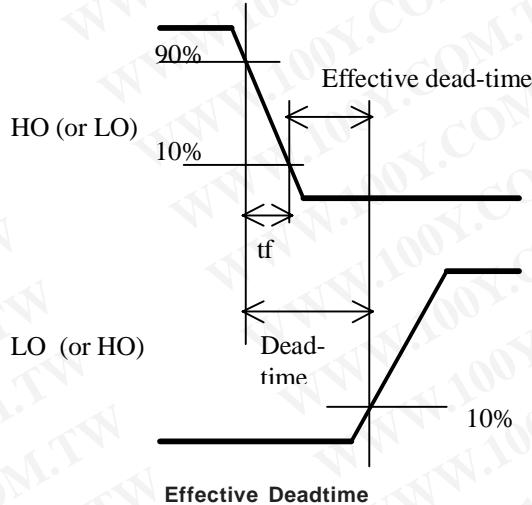

A longer deadtime period is required for a MOSFET with a larger gate charge value because of the longer t<sub>f</sub>. A shorter effective deadtime setting is always beneficial to achieve better linearity in the Class D switching stage. However, the likelihood of shoot-through current increases with narrower deadtime settings in mass production. Negative values of effective deadtime may cause excessive heat dissipation in the MOSFETs, potentially leading to their serious damage. To calculate the optimal deadtime in a given application, the fall time (t<sub>f</sub>) for both output voltages, HO and LO, in the actual circuit needs to be measured. In addition, the effective deadtime can also vary with temperature and device parameter variations. Therefore, a minimum effective deadtime of 10 ns is recommended to avoid shoot-through current over the range of operating temperatures and supply voltages.


## IRS20124S(PbF)

### DT/SD pin

DT/SD pin provides two functions: 1) setting deadtime and 2) shutdown. The IRS20124 determines its operation mode based on the voltage applied to the DT/SD pin. An internal comparator translates which mode is being used by comparing internal reference voltages. Threshold voltages for each mode are set internally by a resistive voltage divider off  $V_{cc}$ , negating the need of using a precise absolute voltage to set the mode.


Deadtime mode	R1 ( $\Omega$ )	R2 ( $\Omega$ )	DT/SD (V)
DT1	<10k	Open	1.00 ( $V_{cc}$ )
DT2	3.3k	8.2k	0.71 ( $V_{cc}$ )
DT3	5.6k	4.7k	0.46 ( $V_{cc}$ )
DT4	8.2k	3.3k	0.29 ( $V_{cc}$ )

Table 1. Suggested Resistor Values for Deadtime Settings

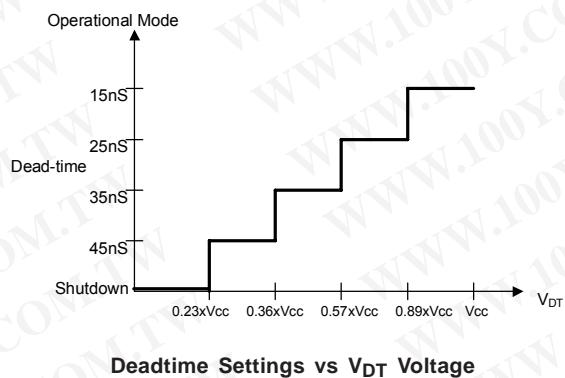

### Design Example

Table 1 shows suggested values of resistance for setting the deadtime. Resistors with up to 5% tolerance can be used if these listed values are followed.

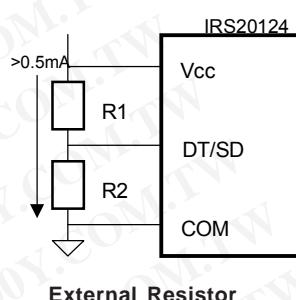

### Shutdown

Since IRS20124 has internal deadtime generation, independent inputs for HO and LO are no longer provided. Shutdown mode is the only way to turn off both MOSFETs simultaneously to protect them from over current conditions. If the DT/SD pin detects an input voltage below the threshold,  $V_{DT4}$ , the IRS20124 will output 0 V at both HO and LO outputs, forcing the switching output node to go into a high impedance state.

### Over Current Sensing


In order to protect the power MOSFET, IRS20124 has a feature to detect over-current conditions, which can occur when speaker wires are shorted together. The over-current shutdown feature can be configured by combining the current sensing function with the shutdown mode via the DT/SD pin.

### Load Current Direction in Class D Audio Application

In a Class D audio amplifier, the direction of the load current alternates according to the audio input signal. An over current condition can therefore happen during either a positive current cycle or a negative current cycle. It should be noted that


## IRS20124S(PbF)

each MOSFET carries a part of the load current in an audio cycle. Bi-directional current sensing offers over current detection capabilities in both cases by monitoring only the low side MOSFET.

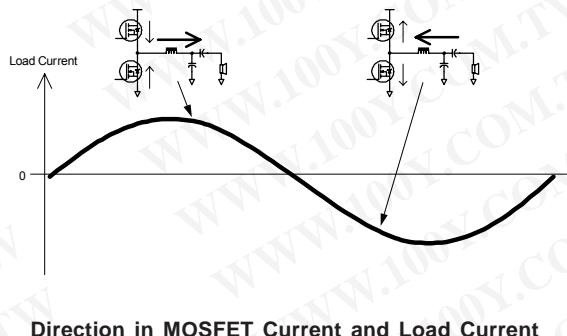

### Bi-Directional Current Sensing

IRS20124 has an over-current detection function utilizing  $R_{DS(ON)}$  of the low side switch as a current sensing shunt resistor. Due to the proprietary HVIC process, the IRS20124 is able to sense negative as well as positive current flow, enabling bi-directional load current sensing without the need for any additional external passive components.

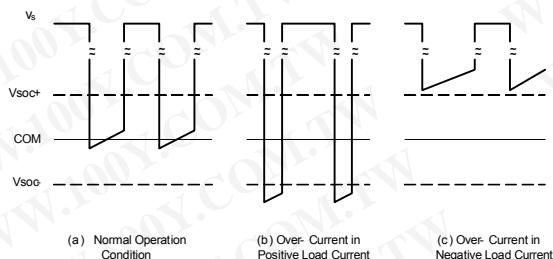


**V<sub>s</sub> Waveform in Over-Current Condition**

IRS20124 measures the current during the period when the low side MOSFET is turned on. Under normal operating conditions,  $V_s$  voltage for the low side switch is well within the trip threshold boundaries,  $V_{SOC-}$  and  $V_{SOC+}$ . In the case of Fig. 9(b) which demonstrates the amplifier sourcing too much current to the load, the  $V_s$  node is found below the trip level,  $V_{SOC-}$ . In Fig. 9(c) with opposite current direction, the amplifier sinks too much current from the load, positioning  $V_s$  well above trip level,  $V_{SOC+}$ .


Once the voltage in  $V_s$  exceeds the preset threshold, the OC pin pulls down to COM to detect an over-current condition.

Since the switching waveform usually contains over/under shoot and associated oscillatory artifacts on their transient edges, a 200 ns blanking interval is inserted in the  $V_s$  voltage sensing block at the instant the low side switch is engaged. Because of this blanking interval, the OC function will be unable to detect over current conditions if the low side ON duration less than 200 ns.

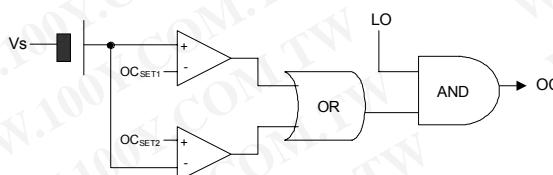

**Simplified Functional Block Diagram of Bi-Directional Current Sensing**

The bi-directional current sensing block has an internal V level shifter feeding the signal to the comparator. OC<sub>SET1</sub> sets the threshold, and is given a trip level at  $V_{SOC+}$ , which is  $OC_{SET1} - V$ . In the same way, for a given OC<sub>SET2</sub>,  $V_{SOC-}$  is set at  $OC_{SET2} - V$ .

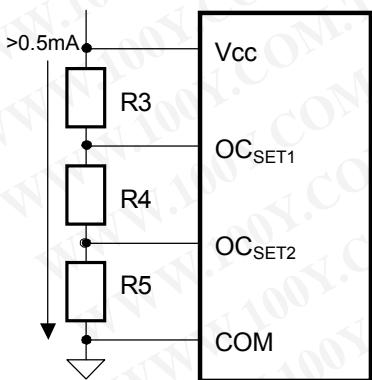

External Resistor Network to Set OC Threshold

## How to set OC Threshold

The positive and negative trip thresholds for bi-directional current sensing are set by the voltages at  $OC_{SET1}$  and  $OC_{SET2}$ .

The trip threshold voltages,  $V_{SOC+}$  and  $V_{SOC-}$ , are determined by the required trip current levels,  $I_{TRIP+}$ ,  $I_{TRIP-}$ , and  $R_{DS(ON)}$  in the low side MOSFET. Since the sensed voltage of  $V_s$  is shifted up by 2.21 V internally and compared with the voltages fed to the  $OC_{SET1}$  and  $OC_{SET2}$  pins, the required value of  $OC_{SET1}$  with respect to COM is

$$V_{OCSET1} = V_{SOC+} + 2.21 \text{ V} = I \times R_{DS(ON)} + 2.21 \text{ V}$$

The same relation holds between  $OC_{SET2}$  and  $V_{SOC-}$ ,

$$V_{OCSET2} = V_{SOC-} + 2.21 \text{ V} = I \times R_{DS(ON)} + 2.21 \text{ V}$$

In general,  $R_{DS(ON)}$  has a positive temperature coefficient that needs to be considered when the threshold level is being set. Please also note that,

in the negative load current direction, the sensing voltage at the  $V_s$  node is limited by the body diode of the low side MOSFET as explained later.

## Design Example

This example demonstrates how to use the external resistor network to set  $I_{TRIP+}$  and  $I_{TRIP-}$  to be  $\pm 11 \text{ A}$ , using a MOSFET that has  $R_{DS(ON)} = 60 \mu\Omega$ .

$$V_{ISET1} = V_{TH+} + 2.21 \text{ V} = I_{TRIP+} \times R_{DS(ON)} + 2.21 \text{ V} = \\ 11 \times 60 \mu\Omega + 2.21 \text{ V} = 2.87 \text{ V}$$

$$V_{ISET2} = V_{TH-} + 2.21 \text{ V} = I_{TRIP-} \times R_{DS(ON)} + 2.21 \text{ V} = \\ (-11) \text{ V } 60 \mu\Omega + 2.21 \text{ V} = 1.55 \text{ V}$$

The total resistance of resistor network is based on the voltage at the  $V_{CC}$  and required bias current in this resistor network.

$$R_{total} = R3 + R4 + R5 = V_{CC} / I_{bias} \\ = 12 \text{ V} / 1 \mu\text{A} = 12 \text{ k}\Omega$$

The expected voltage across  $R3$  is  $V_{CC} - V_{ISET1} = 12 \text{ V} - 2.87 \text{ V} = 9.13 \text{ V}$ . Similarly, the voltages across  $R4$  is  $V_{SOC+} - V_{SOC-} = 2.87 \text{ V} - 1.55 \text{ V} = 1.32 \text{ V}$ , and the voltage across  $R5$  is  $V_{ISET2} = 1.55 \text{ V}$  respectively.

$$R3 = 9.13 \text{ V} / I_{bias} = 9.13 \text{ k}\Omega$$

$$R4 = 1.32 \text{ V} / I_{bias} = 1.32 \text{ k}\Omega$$

$$R5 = 1.55 \text{ V} / I_{bias} = 1.55 \text{ k}\Omega$$

Choose  $R3 = 9.09 \text{ k}\Omega$ ,  $R4 = 1.33 \text{ k}\Omega$ ,  $R5 = 1.54 \text{ k}\Omega$  from E-96 series.

Consequently, actual threshold levels are

$$V_{SOC+} = 2.88 \text{ V} \text{ gives } I_{TRIP+} = 11.2 \text{ A}$$

$$V_{SOC-} = 1.55 \text{ V} \text{ gives } I_{TRIP-} = -11.0 \text{ A}$$

Resisters with 1% tolerances are recommended.


## IRS20124S(PbF)

### OC Output Signal

The OC pin is a 20 V open drain output. The OC pin is pulled down to ground when an over current condition is detected. A single external pull-up resistor can be shared by multiple IRS20124 OC pins to form the ORing logic. In order for a microprocessor to read the OC signal, this information is buffered with a mono stable multi vibrator to ensure 100 ns minimum pulse width. Because of unpredictable logic status of the OC pin, the OC signal should be ignored during power up/down.

### Limitation from Body Diode in MOSFET

When a Class D stage outputs a positive current, flowing from the Class D amp to the load, the body diode of the MOSFET will turn on when the drain to source voltage of the MOSFET become larger than the diode forward drop voltage. In such a case, the sensing voltage at the  $V_s$  pin of the IRS20124 is clamped by the body diode. This means that the effective  $R_{DS(ON)}$  is now much lower than expected from  $R_{DS(ON)}$  of the MOSFET, and the  $V_s$  node may not able to reach the threshold to turn the OC output on before the MOSFET fails. Therefore, the region where body diode clamping takes place should be avoided when setting  $V_{soc}$ .

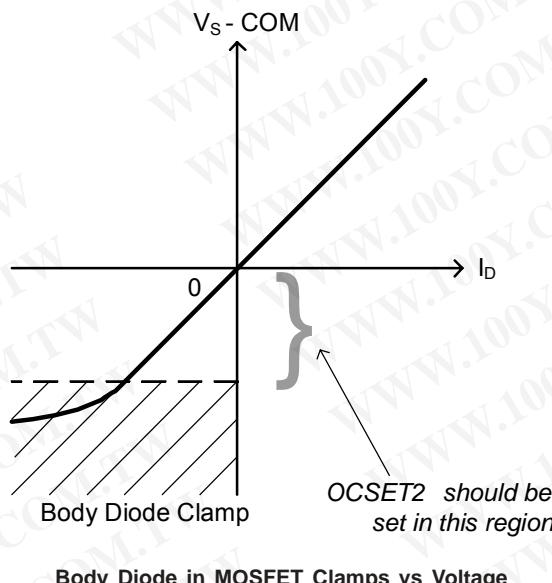


For further application information for gate driver IC please refer to AN-978 and DT98-2a. For further application information for class D application, please refer to AN-1070 and AN-1071.

International  
**IR** Rectifier

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**IRS20124S(PbF)**

### Case Outline

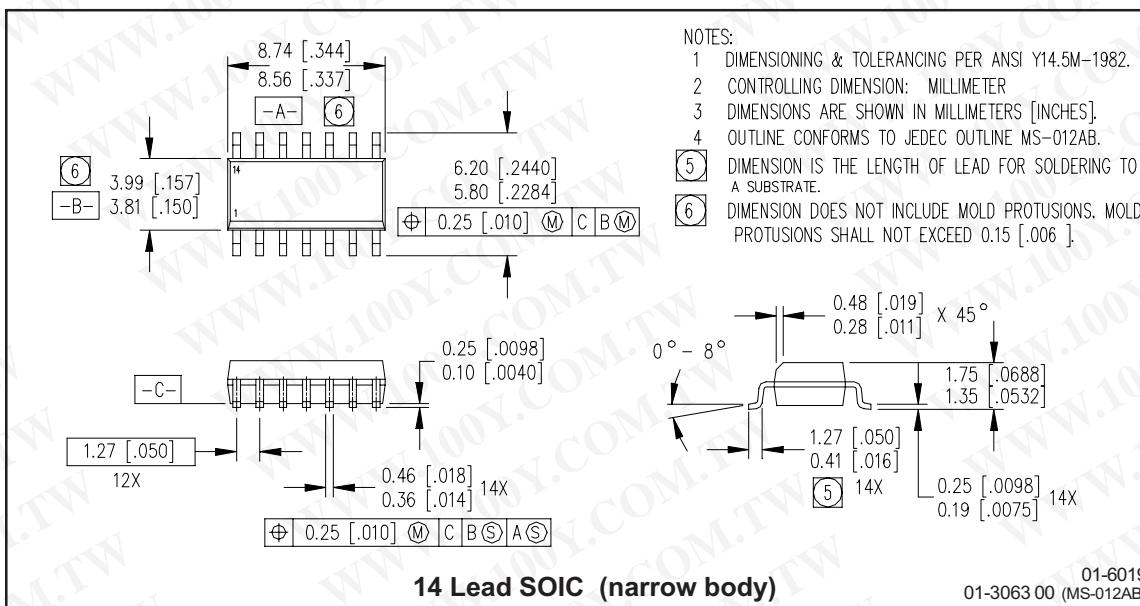

14 Lead SOIC (narrow body)


01-6019  
01-3063 00 (MS-012AB)

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier


## IRS20124S(PbF)

### Tape & Reel 14-Lead SOIC

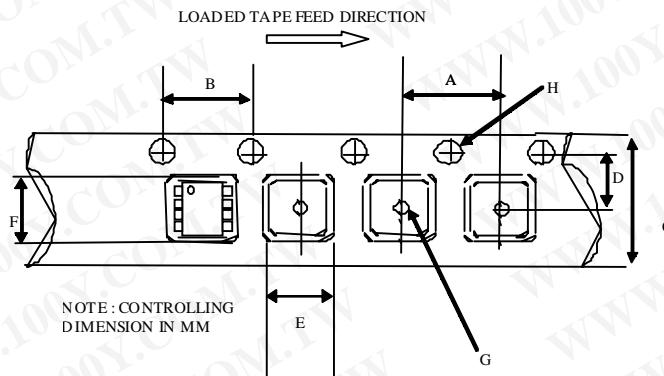

CARRIER TAPE DIMENSION FOR 14SOICN

Code	Metric		Imperial	
	Min	Max	Min	Max
A	7.90	8.10	0.311	0.318
B	3.90	4.10	0.153	0.161
C	15.70	16.30	0.618	0.641
D	7.40	7.60	0.291	0.299
E	6.40	6.60	0.252	0.260
F	9.40	9.60	0.370	0.378
G	1.50	n/a	0.059	n/a
H	1.50	1.60	0.059	0.062

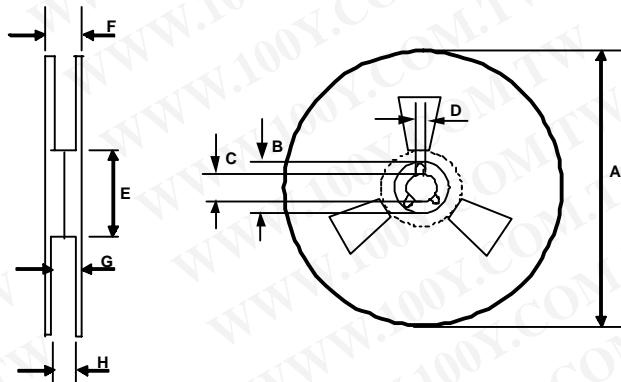

REEL DIMENSIONS FOR 14SOICN


Code	Metric		Imperial	
	Min	Max	Min	Max
A	329.60	330.25	12.976	13.001
B	20.95	21.45	0.824	0.844
C	12.80	13.20	0.503	0.519
D	1.95	2.45	0.767	0.096
E	98.00	102.00	3.858	4.015
F	n/a	22.40	n/a	0.881
G	18.50	21.10	0.728	0.830
H	16.40	18.40	0.645	0.724

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

International  
**IR** Rectifier

## IRS20124S(PbF)

### LEADFREE PART MARKING INFORMATION

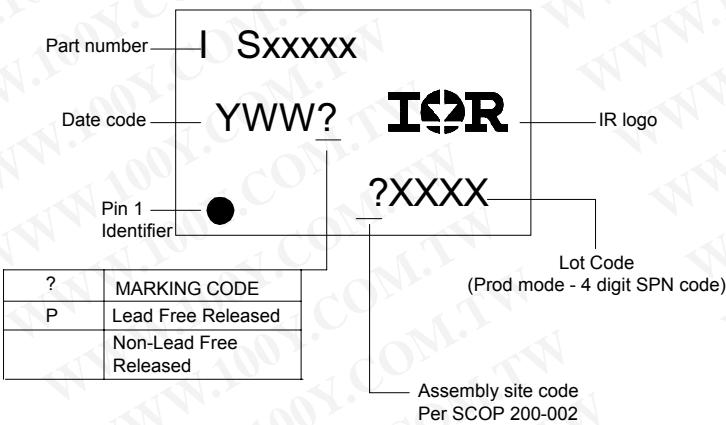

### ORDER INFORMATION

14-Lead SOIC IRS20124SPbF  
14-Lead SOIC Tape & Reel IRS20124STRPbF

International  
**IR** Rectifier

SO-14 package is MSL2 qualified.

This product has been designed and qualified for the industrial level.

Qualification standards can be found at IR's Web Site <http://www.irf.com>

**WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245 Tel:(310) 252-7105  
Data and specifications subject to change without notice. 12/4/2006