


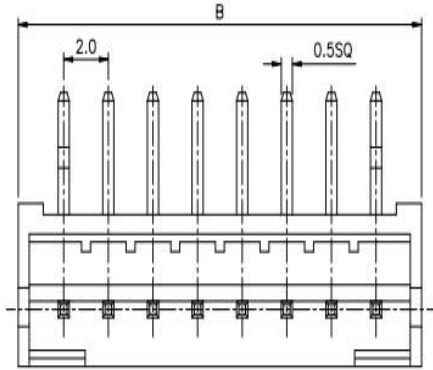


△ SPECIFICATION

Current Rating:2A
 Voltage Rating:100V AC
 Contact Resistance:20 Milliohms Max.
 Dielectric Withstanding Voltage:800V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-0),White
 Contact:Brass,Tin Plated
 Applicable P.C. Board Thickness:0.8~1.6mm
 RoHS Compliant

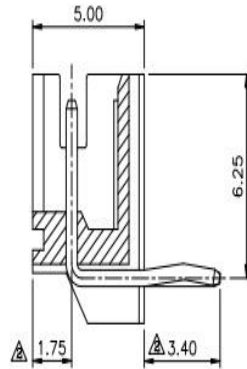

Recommended P.C.B. Layout

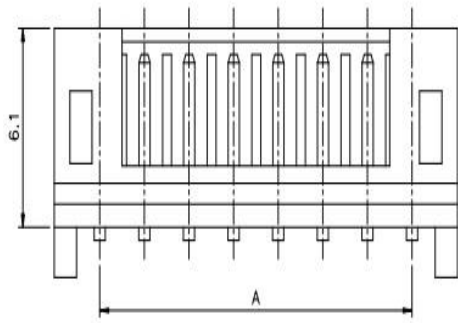

Poles.	A	B
2	2.0	6.04
3	4.0	8.04
4	6.0	10.04
5	8.0	12.04
6	10.0	14.06
7	12.0	16.06
8	14.0	18.08
9	16.0	20.08
10	18.0	22.10
11	20.0	24.10
12	22.0	26.12
13	24.0	28.12
14	26.0	30.14
15	28.0	32.14
16	30.0	34.14

DRAWING No.

01548

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.3

.XX ±0.2

SCALE

NONE

REV.

A2

UNIT

mm



NO.REV.

REVISIONS

CHK

DATE

△ A2 Modify Data HZF 03/23/2010

△ A1 Modify Data BECKY 2005/02/17

△ A NEW RELEASE