

# TDA8954

## 2 × 210 W class-D power amplifier

Rev. 01 — 24 December 2009

Product data sheet

## 1. General description

---

The TDA8954 is a stereo or mono high-efficiency Class D audio power amplifier in a single IC featuring low power dissipation. It is designed to deliver up to 2 × 210 W into a 4 Ω load in a stereo Single-Ended (SE) application, or 1 × 420 W into an 8 Ω load in a mono Bridge-Tied Load (BTL) application.

It combines the benefits of Class D efficiency (≈93 % into a 4 Ω load) with audiophile sound quality comparable to that associated with Class AB amplification.

The amplifier operates over a wide supply voltage range from ±12.5 V to ±42.5 V and features low quiescent current consumption.

The TDA8954 is supplied with two diagnostic pins for monitoring the status of Thermal Fold Back (TFB), Over Current Protection (OCP) and other protection circuits.

## 2. Features

---

- High output power in typical applications:
  - ◆ SE 2 × 210 W,  $R_L = 4 \Omega$  ( $V_{DD} = 41 \text{ V}$ ;  $V_{SS} = -41 \text{ V}$ )
  - ◆ SE 2 × 235 W,  $R_L = 3 \Omega$  ( $V_{DD} = 39 \text{ V}$ ;  $V_{SS} = -39 \text{ V}$ )
  - ◆ SE 2 × 150 W,  $R_L = 6 \Omega$  ( $V_{DD} = 41 \text{ V}$ ;  $V_{SS} = -41 \text{ V}$ )
  - ◆ BTL 1 × 420 W,  $R_L = 8 \Omega$  ( $V_{DD} = 41 \text{ V}$ ;  $V_{SS} = -41 \text{ V}$ )
- Symmetrical operating supply voltage range from ±12.5 V to ±42.5 V
- Stereo full differential inputs, can be used as stereo SE or mono BTL amplifier
- Low noise
- Smooth pop noise-free start-up and switch off
- 2-pin diagnostics for protection circuits
- Fixed frequency internal or external clock
- High efficiency ≈93 %
- Zero dead time switching
- Low quiescent current
- Advanced protection strategy: voltage protection and output current limiting
- Thermal FoldBack (TFB) with disable functionality
- Fixed gain of 30 dB in SE and 36 dB in BTL applications
- Fully short-circuit proof across load
- BD modulation in BTL configuration
- Clock protection

### 3. Applications

- DVD
- Mini and micro receiver
- Subwoofers
- Home Theater In A Box (HTIAB) system
- High-power speaker system
- Public Address (PA) system

### 4. Quick reference data

Table 1. Quick reference data

| Symbol                                     | Parameter                                | Conditions   | Min | Typ   | Max | Unit    |
|--|--|--|-----|-------|-----|---------|
| <b>General</b>                             |  |  |     |       |     |         |
| V <sub>DD</sub>                            | positive supply voltage                  | Operating mode   | [1] | 12.5  | 41  | 42.5 V  |
| V <sub>SS</sub>                            | negative supply voltage                  | Operating mode   | [2] | -12.5 | -41 | -42.5 V |
| V <sub>th(ovp)</sub>                       | overvoltage protection threshold voltage | Standby, Mute modes; V <sub>DD</sub> – V <sub>SS</sub>   |     | 85    | -   | 90 V    |
| I <sub>DD(tot)</sub>                       | total positive supply current            | the sum of the currents through pins VDDA, VDDP1 and VDDP2<br>Operating mode; no load; no filter; no RC-snubber network connected;   |     | -     | 50  | 60 mA   |
| I <sub>SS(tot)</sub>                       | total negative supply current            | the sum of the currents through pins VSSA, VSSP1 and VSSP2<br>Operating mode; no load; no filter; no RC-snubber network connected;   |     | -     | 65  | 75 mA   |
| <b>Stereo single-ended configuration</b>   |  |  |     |       |     |         |
| P <sub>o</sub>                             | output power                             | T <sub>j</sub> = 85 °C; L <sub>LC</sub> = 15 μH; C <sub>LC</sub> = 680 nF (see Figure 13)  |     |       |     |         |
|  |  | THD + N = 10 %; R <sub>L</sub> = 4 Ω; V <sub>DD</sub> = 41 V; V <sub>SS</sub> = -41 V  | [3] | -     | 210 | - W     |
|  |  | THD + N = 10 %; R <sub>L</sub> = 4 Ω; V <sub>DD</sub> = 35 V; V <sub>SS</sub> = -35 V  |     | -     | 150 | - W     |
| <b>Mono bridge-tied load configuration</b> |  |  |     |       |     |         |
| P <sub>o</sub>                             | output power                             | T <sub>j</sub> = 85 °C; L <sub>LC</sub> = 22 μH; C <sub>LC</sub> = 680 nF (see Figure 13); R <sub>L</sub> = 8 Ω; THD + N = 10 %; V <sub>DD</sub> = 41 V; V <sub>SS</sub> = -41 V | [3] | -     | 420 | - W     |

[1] V<sub>DD</sub> is the supply voltage on pins VDDP1, VDDP2 and VDDA.

[2] V<sub>SS</sub> is the supply voltage on pins VSSP1, VSSP2 and VSSA.


[3] Output power is measured indirectly; based on R<sub>DSon</sub> measurement; see Section 14.3.

### 5. Ordering information

Table 2. Ordering information


| Type number | Package |  | Version  |
|-------------|---------|--|----------|
|             | Name    | Description  |          |
| TDA8954J    | DBS23P  | plastic DIL-bent-SIL power package; 23 leads (straight lead length 3.2 mm) | SOT411-1 |
| TDA8954TH   | HSOP24  | plastic, heatsink small outline package; 24 leads; low stand-off height    | SOT566-3 |

## 6. Block diagram

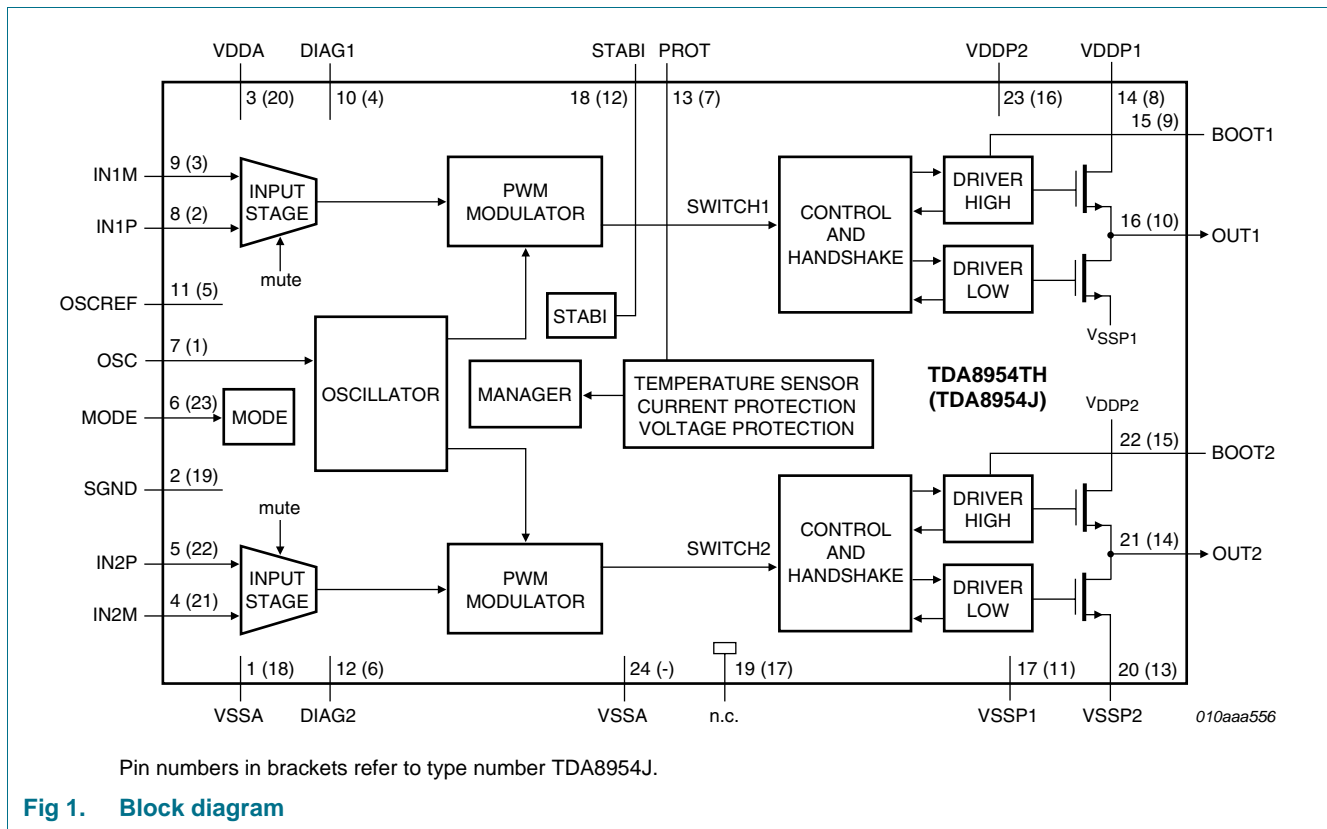

## 7. Pinning information

### 7.1 Pinning

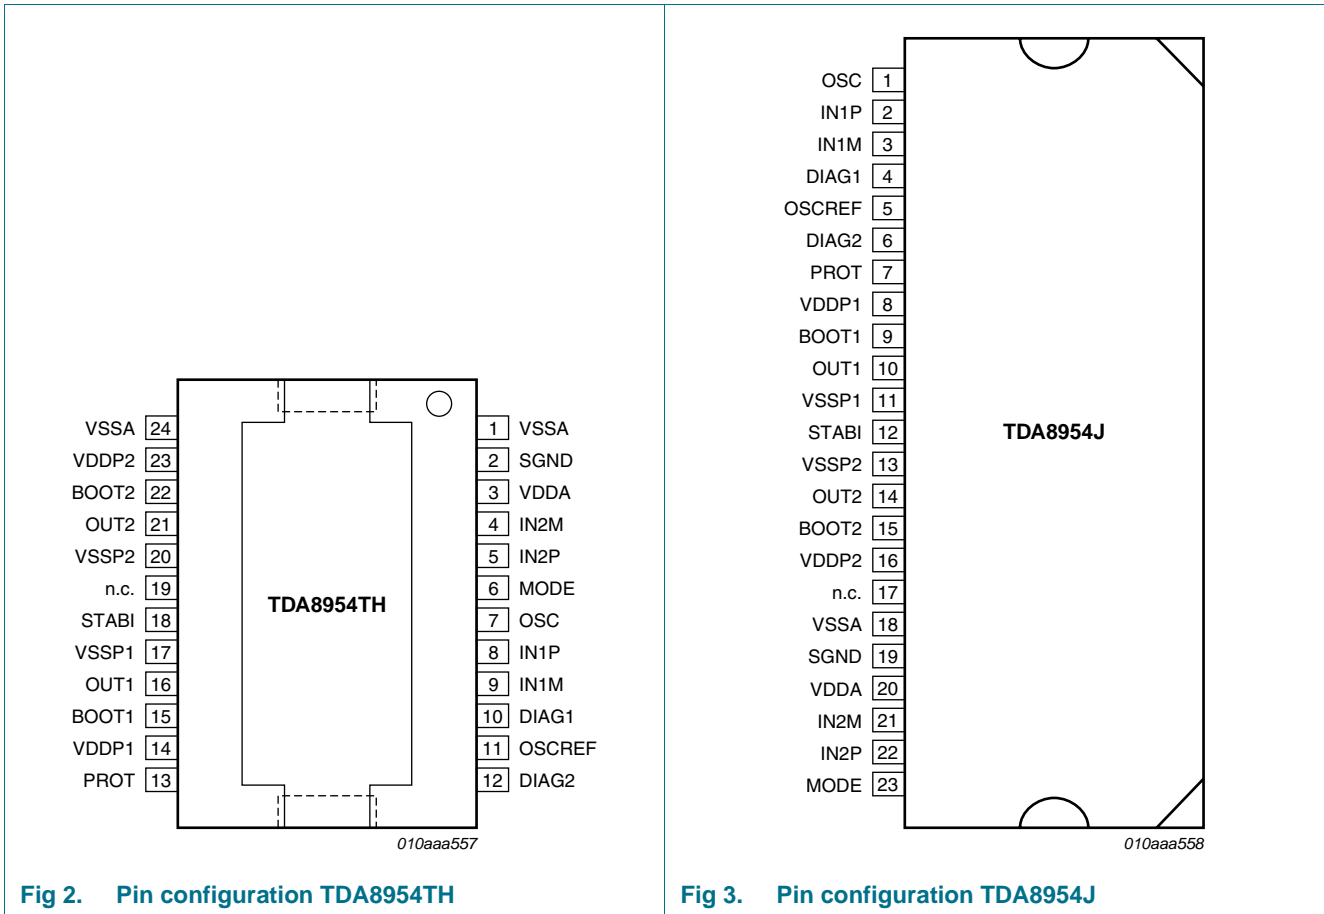

## 7.2 Pin description

**Table 3. Pin description**

| Symbol | Pin       |          | Description  |
|--------|-----------|----------|--|
|        | TDA8954TH | TDA8954J |  |
| VSSA   | 1         | 18       | negative analog supply voltage                         |
| SGND   | 2         | 19       | signal ground  |
| VDDA   | 3         | 20       | positive analog supply voltage                         |
| IN2M   | 4         | 21       | channel 2 negative audio input                         |
| IN2P   | 5         | 22       | channel 2 positive audio input                         |
| MODE   | 6         | 23       | mode selection input: Standby, Mute or Operating mode  |
| OSC    | 7         | 1        | oscillator frequency adjustment or tracking input      |
| IN1P   | 8         | 2        | channel 1 positive audio input                         |
| IN1M   | 9         | 3        | channel 1 negative audio input                         |
| DIAG1  | 10        | 4        | diagnostic output 1 (open drain; TFB)                  |
| OSCREF | 11        | 5        | reference for OSC pin                                  |
| DIAG2  | 12        | 6        | diagnostic output 2 (open drain; protection functions) |
| PROT   | 13        | 7        | decoupling capacitor for protection (OCP)              |
| VDDP1  | 14        | 8        | channel 1 positive power supply voltage                |
| BOOT1  | 15        | 9        | channel 1 bootstrap capacitor                          |
| OUT1   | 16        | 10       | channel 1 PWM output                                   |
| VSSP1  | 17        | 11       | channel 1 negative power supply voltage                |
| STABI  | 18        | 12       | decoupling of internal stabilizer for logic supply     |
| n.c.   | 19        | 17       | not connected  |
| VSSP2  | 20        | 13       | channel 2 negative power supply voltage                |
| OUT2   | 21        | 14       | channel 2 PWM output                                   |
| BOOT2  | 22        | 15       | channel 2 bootstrap capacitor                          |
| VDDP2  | 23        | 16       | channel 2 positive power supply voltage                |
| VSSA   | 24        | -        | negative analog supply voltage                         |

## 8. Functional description

### 8.1 General

The TDA8954 is a two-channel audio power amplifier that uses Class D technology.

For each channel, the audio input signal is converted into a digital Pulse Width Modulation (PWM) signal using an analog input stage and a PWM modulator; see [Figure 1](#). To drive the output power transistors, the digital PWM signal is fed to a control and handshake block and to high- and low-side driver circuits. This level-shifts the low-power digital PWM signal from a logic level to a high-power PWM signal switching between the main supply lines.

A second-order low-pass filter converts the PWM signal to an analog audio signal that can be used to drive a loudspeaker.

The TDA8954 single-chip Class D amplifier contains high-power switches, drivers, timing and handshaking between the power switches, along with some control logic. To ensure maximum system robustness, an advanced protection strategy has been implemented to provide overvoltage, overtemperature and overcurrent protection.

Each of the two audio channels contains a PWM modulator, an analog feedback loop and a differential input stage. The TDA8954 also contains circuits common to both channels such as the oscillator, all reference sources, the mode interface and a digital timing manager.

The two independent amplifier channels feature high output power, high efficiency, low distortion and low quiescent currents. They can be connected in the following configurations:


- Stereo Single-Ended (SE)
- Mono Bridge-Tied Load (BTL)

The amplifier system can be switched to one of three operating modes using pin MODE:


- Standby mode: featuring very low quiescent current
- Mute mode: the amplifier is operational but the audio signal at the output is suppressed by disabling the voltage-to-current (VI) converter input stages
- Operating mode: the amplifier is fully operational, de-muted and can deliver an output signal

A slowly rising voltage should be applied (e.g. via an RC network) to pin MODE to ensure pop noise-free start-up. The bias-current setting of the (VI converter) input stages is related to the voltage on the MODE pin.

In Mute mode, the bias-current setting of the VI converters is zero (VI converters are disabled). In Operating mode, the bias current is at a maximum. The time constant required to apply the DC output offset voltage gradually between Mute and Operating mode levels can be generated using an RC network connected to pin MODE. An example of a circuit for driving the MODE pin, optimized for optimal pop noise performance, is shown in [Figure 4](#). If the capacitor was omitted, the very short switching time constant could result in audible pop noises being generated at start-up (depending on the DC output offset voltage and loudspeaker used).

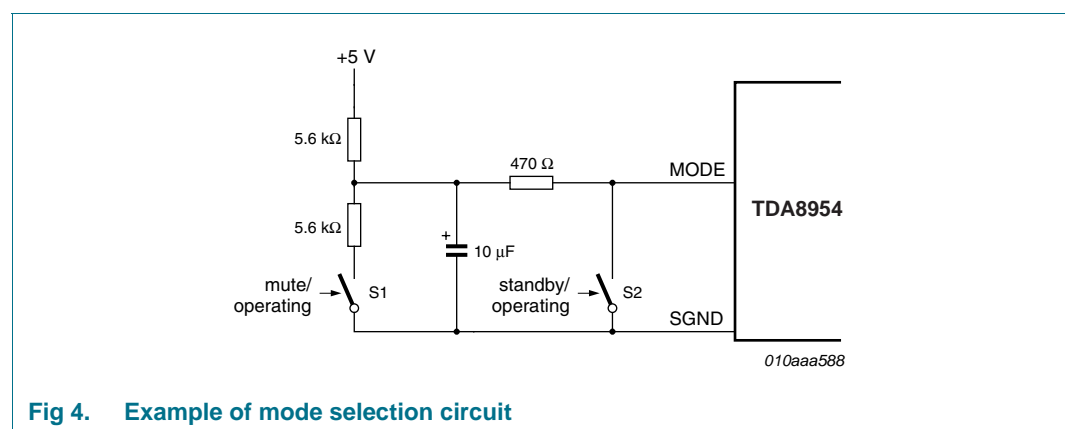

The smooth transition between Mute and Operating modes causes a gradual increase in the DC offset output voltage, which becomes inaudible (no pop noise because the DC offset voltage rises smoothly). An overview of the start-up timing is provided in [Figure 5](#). For proper switch-off, the MODE pin should be forced LOW at least 100 ms before the supply lines ( $V_{DD}$  and  $V_{SS}$ ) drop below 12.5 V.

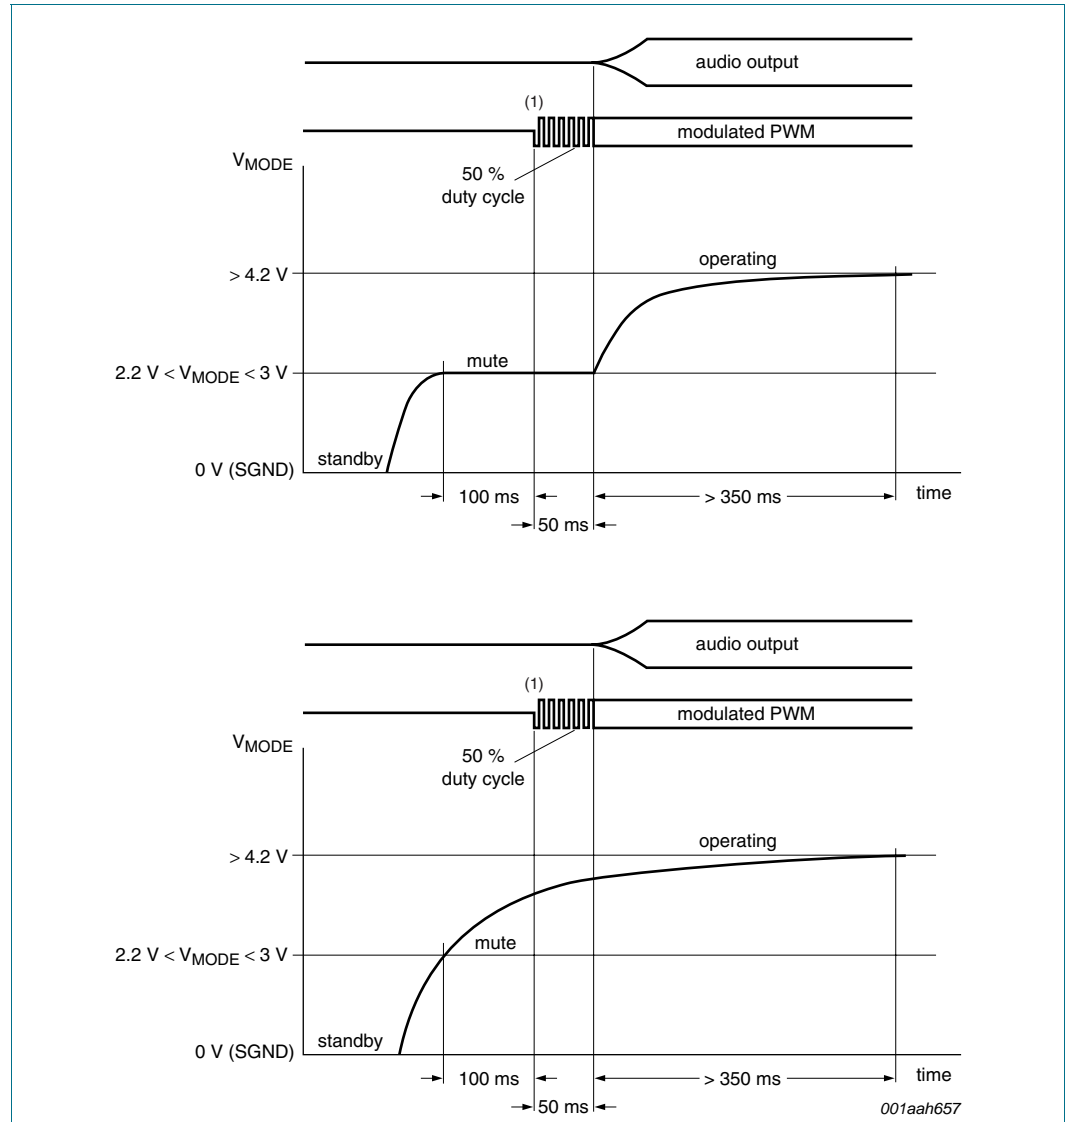

(1) First  $\frac{1}{4}$  pulse down.

**Upper diagram:** When switching from Standby to Mute, there is a delay of approximately 100 ms before the output starts switching. The audio signal will become available once  $V_{MODE}$  reaches the Operating mode level (see [Table 9](#)), but not earlier than 150 ms after switching to Mute. To start-up pop noise-free, it is recommended that the time constant applied to pin MODE be at least 350 ms for the transition between Mute and Operating modes.

**Lower diagram:** When switching directly from Standby to Operating mode, there is a delay of 100 ms before the outputs start switching. The audio signal becomes available after a second delay of 50 ms. To start-up pop noise-free, it is recommended that the time-constant applied to pin MODE be at least 500 ms for the transition between Standby and Operating modes.

**Fig 5. Timing on mode selection input pin MODE**

## 8.2 Diagnostics

The TDA8954 provides two diagnostic signals on pins DIAG1 and DIAG2. Both are open-drain outputs that can be pulled up via a resistor (10 kΩ recommended) to a maximum of 5 V relative to the GND pin. The maximum input current on these pins is 1 mA.


Pin DIAG1 provides a TFB warning signal. Pin DIAG2 can be used to monitor the OCP status and the protection status (whether one of the protection circuits has switched off the amplifier).

Details of the timing of these signals can be found in [Section 8.4.1.1](#) and [Section 8.4.2](#); see also [Table 5](#).

## 8.3 Pulse-width modulation frequency

The amplifier output signal is a PWM signal with a typical carrier frequency of between 250 kHz and 450 kHz. A second-order LC demodulation filter on the output converts the PWM signal into an analog audio signal. The carrier frequency,  $f_{OSC}$ , is determined by an external resistor,  $R_{OSC}$ , connected between pins OSC and OSCREF. The optimal carrier frequency setting is between 250 kHz and 450 kHz.

The carrier frequency is set to 335 kHz by connecting an external 30 kΩ resistor between pins OSC and OSCREF (see [Figure 6](#)).

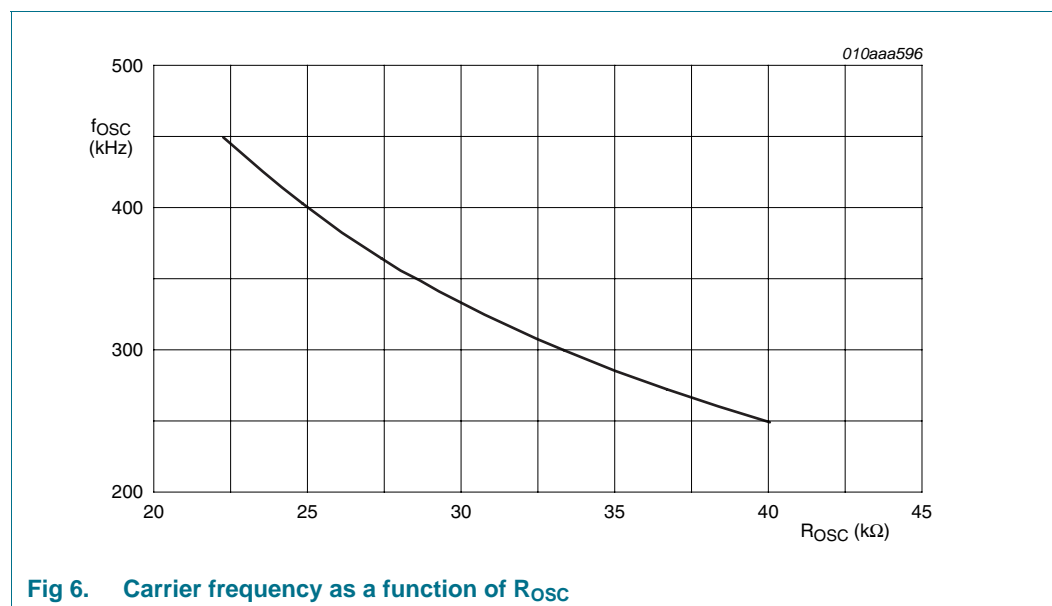

If two or more Class D amplifiers are used in the same audio application, an external clock circuit must be used to synchronize all amplifiers (see [Section 14.4](#)). This will ensure that they operate at the same switching frequency, thus avoiding beat tones (if the switching frequencies are different, audible interference known as 'beat tones' can be generated).



## 8.4 Protection

The following protection circuits are incorporated into the TDA8954:

- Thermal protection:
  - Thermal FoldBack (TFB)
  - OverTemperature Protection (OTP)
- OverCurrent Protection (OCP)
- Window Protection (WP)
- Supply voltage protection:
  - UnderVoltage Protection (UVP)
  - OverVoltage Protection (OVP)
  - UnBalance Protection (UBP)
- Clock Protection (CP)

How the device reacts to a fault condition depends on which protection circuit has been activated.

### 8.4.1 Thermal protection

The TDA8954 employs an advanced thermal protection strategy. A TFB function gradually reduces the output power within a defined temperature range. If the temperature continues to rise, OTP is activated to shut the device down completely.

#### 8.4.1.1 Thermal FoldBack (TFB)

If the junction temperature ( $T_j$ ) exceeds the thermal foldback activation threshold ( $T_{act(th\_fold)}$ ), the gain is gradually reduced. This reduces the output signal amplitude and the power dissipation, eventually stabilizing the temperature.

When  $T_j$  reaches  $T_{act(warn)th\_fold}$ , the TFB warning signal is activated (pin DIAG1 goes LOW). Thermal foldback is activated if the temperature rises to  $T_{act(th\_fold)}$  (see [Figure 7](#)).

The TFB warning signal is reset when the temperature drops below  $T_{rst(warn)th\_fold}$  again (see [Figure 8](#)).

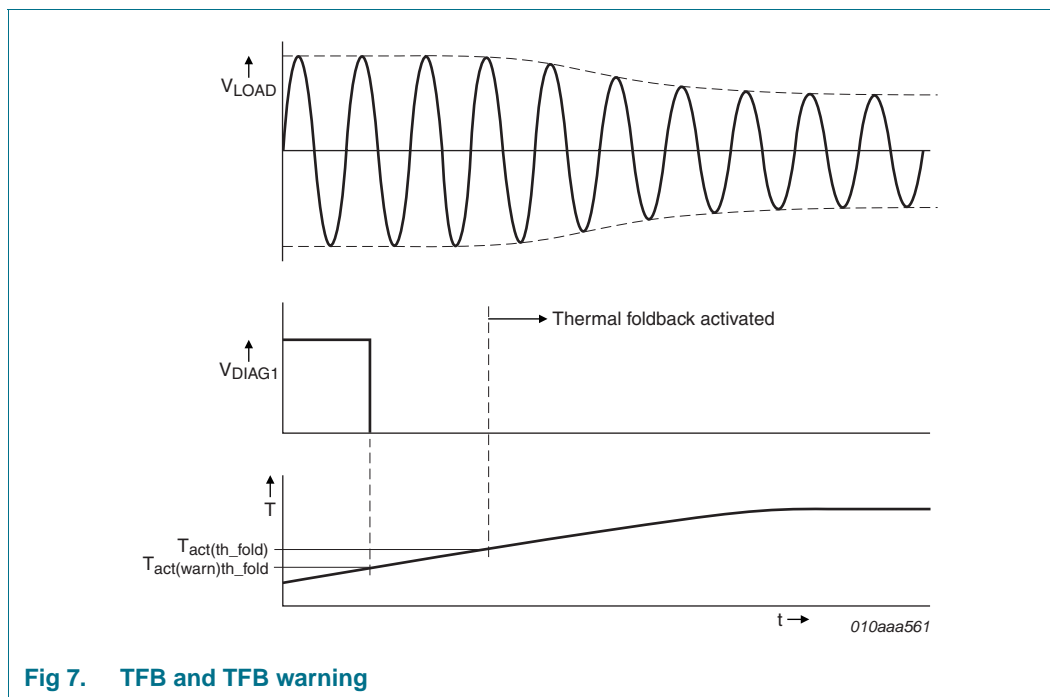


Fig 7. TFB and TFB warning

Thermal foldback is active when:

$$T_{\text{act(th\_fold)}} < T_j < T_{\text{act(th\_prot)}}$$

The value of  $T_{\text{act(th\_fold)}}$  for the TDA8954 is approximately 145 °C; see [Table 9](#) for more details. The gain will be reduced by at least 6 dB (to  $T_{\text{hg(th\_fold)}}$ ) before the temperature reaches  $T_{\text{act(th\_prot)}}$  (see [Figure 8](#)).


TFB can be disabled by applying the appropriate voltage on pin MODE (see [Table 9](#)), in which case the dissipation will not be limited by TFB. The junction temperature may then rise as high as the OTP threshold, when the amplifier will be shut down (see [Section 8.4.1.2](#)). The amplifier will start up again once it has cooled down. This introduces audio holes.

The TFB warning signal is not disabled when the TFB is disabled via the MODE pin. This allows a temperature control function in the application to monitor the junction temperature and, if necessary, to reduce the level of the audio signal transmitted to the amplifier.

#### 8.4.1.2 OverTemperature Protection (OTP)

If TFB fails to stabilize the temperature and the junction temperature continues to rise, the amplifier will shut down as soon as the temperature reaches the thermal protection activation threshold,  $T_{\text{act(th\_prot)}}$ . The amplifier will resume switching approximately 100 ms after the temperature drops below  $T_{\text{act(th\_prot)}}$ .

The thermal behavior is illustrated in [Figure 8](#).

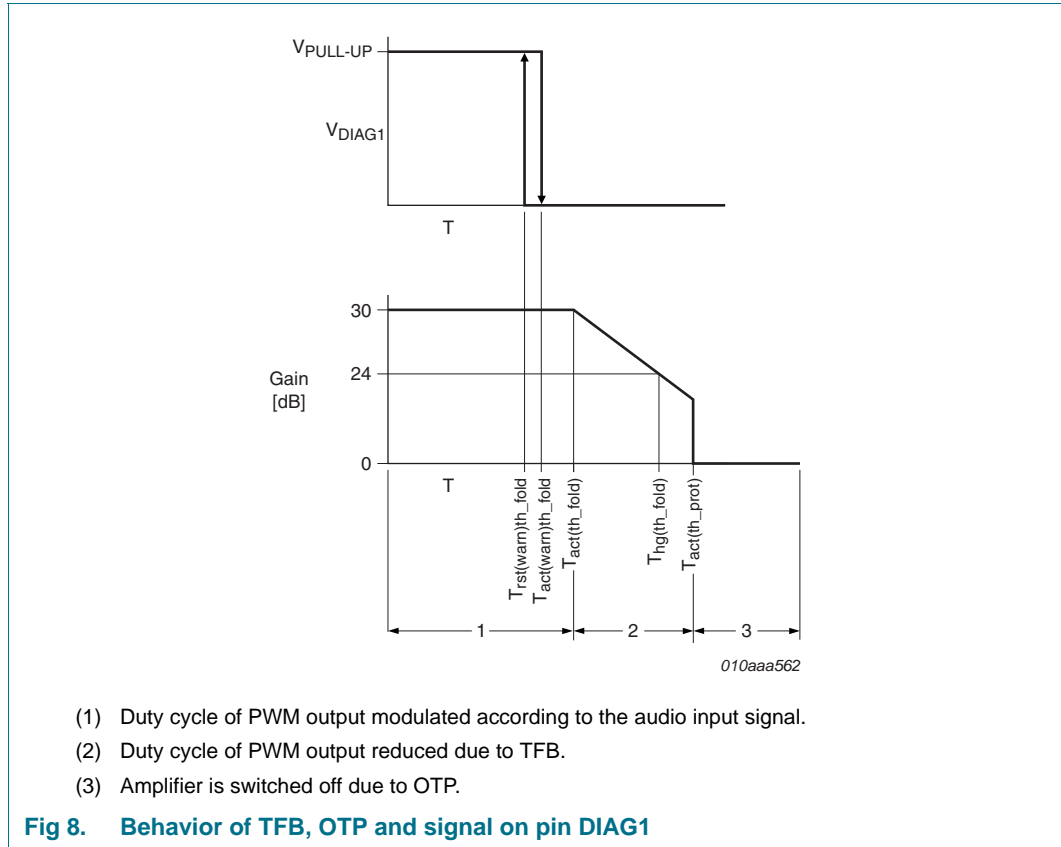

**8.4.2 OverCurrent Protection (OCP)**

In order to guarantee the robustness of the TDA8954, the maximum output current delivered at the output stages is limited. OCP is built in for each output power switch.

OCP is activated when the current in one of the power transistors exceeds the OCP threshold ( $I_{ORM} = 12\text{ A}$ ) due, for example, to a short-circuit to a supply line or across the load.

The TDA8954 amplifier distinguishes between low-ohmic short-circuit conditions and other overcurrent conditions such as a dynamic impedance drop at the loudspeaker. The impedance threshold ( $Z_{th}$ ) depends on the supply voltage.

How the amplifier reacts to a short circuit depends on the short-circuit impedance:

- Short-circuit impedance  $> Z_{th}$ : the amplifier limits the maximum output current to  $I_{ORM}$  but the amplifier does not shut down the PWM outputs. Effectively, this results in a clipped output signal across the load (behavior very similar to voltage clipping).
- Short-circuit impedance  $< Z_{th}$ : the amplifier limits the maximum output current to  $I_{ORM}$  and at the same time discharges the capacitor on pin PROT. When  $C_{PROT}$  is fully discharged, the amplifier shuts down completely and an internal timer is started.

The value of the protection capacitor ( $C_{PROT}$ ) connected to pin PROT can be between 10 pF and 220 pF (typically 47 pF). While OCP is activated, an internal current source is enabled that will discharge  $C_{PROT}$ .

When OCP is activated, the active power transistor is turned off and the other power transistor is turned on to reduce the current ( $C_{\text{PROT}}$  is partially discharged). Normal operation is resumed at the next switching cycle ( $C_{\text{PROT}}$  is recharged).  $C_{\text{PROT}}$  is partially discharge each time OCP is activated during a switching cycle. If the fault condition that caused OCP to be activated persists long enough to fully discharge  $C_{\text{PROT}}$ , the amplifier will switch off completely and a restart sequence will be initiated.

After a fixed period of 100 ms, the amplifier will attempt to switch on again, but will fail if the output current still exceeds the OCP threshold. The amplifier will continue trying to switch on every 100 ms. The average power dissipation will be low in this situation because the duty cycle is short.

Switching the amplifier on and off in this way will generate unwanted 'audio holes'. This can be avoided by increasing the value of  $C_{\text{PROT}}$  (up to 220 pF) to delay amplifier switch-off.  $C_{\text{PROT}}$  will also prevent the amplifier switching off due to transient frequency-dependent impedance drops at the speakers.

The amplifier will switch on, and remain in Operating mode, once the overcurrent condition has been removed. OCP ensures the TDA8954 amplifier is fully protected against short-circuit conditions while avoiding audio holes.

**Table 4. Current limiting behavior during low output impedance conditions at different values of  $C_{\text{PROT}}$**

| Type    | $V_{\text{DD}}/V_{\text{SS}}$ (V) | $V_{\text{I}}$ (mV, p-p) | f (Hz) | $C_{\text{PROT}}$ (pF) | PWM output stops                     |  |                                      |
|---------|-----------------------------------|--------------------------|--------|------------------------|--------------------------------------|--|--------------------------------------|
|         |                                   |                          |        |                        | Short ( $Z_{\text{th}} = 0 \Omega$ ) | Short ( $Z_{\text{th}} = 0.5 \Omega$ ) | Short ( $Z_{\text{th}} = 1 \Omega$ ) |
| TDA8954 | +41/-41                           | 500                      | 20     | 10                     | yes <sup>[1]</sup>                   | yes <sup>[1]</sup>                     | yes <sup>[1]</sup>                   |
|         |                                   |                          |        | 1000                   | 10                                   | yes                                    | no                                   |
|         |                                   |                          | 1000   | 15                     | yes <sup>[1]</sup>                   | yes <sup>[1]</sup>                     | yes <sup>[1]</sup>                   |
|         |                                   |                          |        | 15                     | yes                                  | no                                     | no                                   |
|         |                                   |                          | 1000   | 220                    | no                                   | no                                     | no                                   |

[1] OVP can be triggered by supply pumping; see [Section 14.6](#).

Pin DIAG2 pin can be used to:

1. Monitor the OCP status - a pulsed signal at the switching frequency is generated on DIAG2 when current limiting has been enabled.
2. Monitor the protection status - a pulsed signal with a minimum width of typically 100 ms will be generated on pin DIAG2 to indicate that the amplifier has been switched off by one of the protection circuits (see [Table 5](#)). This signal is also generated at start-up before the amplifier output starts switching.

When a short circuit occurs between the load and the supply voltage, the current will increase rapidly to  $I_{\text{ORM}}$ , when current limiting will be activated. A pulsed signal at the switching frequency will be transmitted on pin DIAG2 to indicate that OCP is active. If the short circuit condition persists long enough to cause the OCP circuit to shut down the amplifier, the DIAG2 signal will be transmitted continuously until the amplifier has started up again and has commenced switching (see [Figure 9](#)).

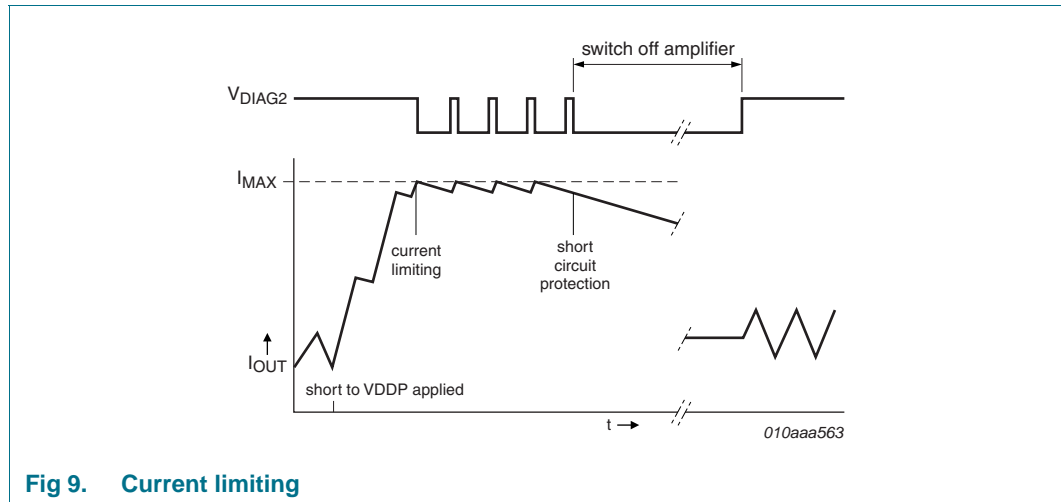


Fig 9. Current limiting

### 8.4.3 Window Protection (WP)

Window Protection (WP) checks the conditions at the output terminals of the power stage and is activated:

- During the start-up sequence, when the TDA8954 is switching from Standby to Mute. Start-up will be interrupted if a short-circuit is detected between one of the output terminals and one of the supply pins. The TDA8954 will wait until the short-circuit to the supply lines has been removed before resuming start-up. The short circuit will not generate large currents because the short-circuit check is carried out before the power stages are enabled.
- When the amplifier is shut down completely because the OCP circuit has detected a short circuit to one of the supply lines.

WP will be activated when the amplifier attempts to restart after 100 ms (see [Section 8.4.2](#)). The amplifier will not start-up again until the short circuit to the supply lines has been removed.

### 8.4.4 Supply voltage protection

If the supply voltage drops below the minimum supply voltage threshold,  $V_{th(uvp)}$ , the UVP circuit will be activated and the system will shut down. Once the supply voltage rises above  $V_{th(uvp)}$  again, the system will restart after a delay of 100 ms.

If the supply voltage exceeds the maximum supply voltage threshold,  $V_{th(ovp)}$ , the OVP circuit will be activated and the power stages will be shut down. When the supply voltage drops below  $V_{th(ovp)}$  again, the system will restart after a delay of 100 ms.

An additional UnBalance Protection (UBP) circuit compares the positive analog supply voltage (on pin VDDA) with the negative analog supply voltage (on pin VSSA) and is triggered if the voltage difference exceeds a factor of two ( $V_{DDA} > 2 \times |V_{SSA}|$  OR  $|V_{SSA}| > 2 \times V_{DDA}$ ). When the supply voltage difference drops below the unbalance threshold,  $V_{th(ubp)}$ , the system restarts after 100 ms.

### 8.4.5 Clock protection (CP)

The clock signal can be provided by an external oscillator connected to pin OSC (see [Section 14.4](#)). When this signal is lost, or the clock frequency is too low, the amplifier will be switched off and will remain off until the clock signal has been restored.

### 8.4.6 Overview of protection functions

An overview of all protection circuits and their respective effects on the output signal is provided in [Table 5](#).

**Table 5. Overview of TDA8954 protection circuits**

| Protection name    | Complete shutdown | Restart directly | Restart after 100 ms | PROT pin active | DIAG1 pin active | DIAG2 pin active |
|--------------------|-------------------|------------------|----------------------|-----------------|------------------|------------------|
| TFB <sup>[1]</sup> | N                 | N                | N                    | N               | Y <sup>[2]</sup> | N                |
| OTP                | Y                 | N                | Y                    | N               | N                | Y                |
| OCP                | Y <sup>[3]</sup>  | N <sup>[3]</sup> | Y <sup>[3]</sup>     | Y               | N                | Y                |
| WP                 | N <sup>[4]</sup>  | Y                | N                    | N               | N                | Y                |
| UVP                | Y                 | N                | Y                    | N               | N                | Y                |
| OVP                | Y                 | N                | Y                    | N               | N                | Y                |
| UBP                | Y                 | N                | Y                    | N               | N                | Y                |
| CP                 | Y                 | N                | Y <sup>[5]</sup>     | N               | N                | Y                |

[1] Amplifier gain depends on the junction temperature.

[2] TFB warning signal on pin DIAG1 is activated before TFB is enabled.

[3] The amplifier shuts down completely only if the short-circuit impedance is below the impedance threshold ( $Z_{th}$ ; see [Section 8.4.2](#)). In all other cases, current limiting results in a clipped output signal.

[4] Fault condition detected during any Standby-to-Mute transition or during a restart after OCP has been activated (short-circuit to one of the supply lines).

[5] As soon as the clock is present.

## 8.5 Differential audio inputs

The audio inputs are fully differential ensuring a high common mode rejection ratio and maximum flexibility in the application.

- Stereo operation: to avoid supply pumping effects and to minimize peak currents in the power supply, the output stages should be configured in anti-phase. To avoid acoustical phase differences, the speakers should also be connected in anti-phase.
- Mono BTL operation: the inputs must be connected in anti-parallel. The output of one channel is inverted and the speaker load is connected between the two outputs of the TDA8954. In practice (because of the OCP threshold) the maximum output power in the BTL configuration can be boosted to twice the maximum output power available in the single-ended configuration.

The input configuration for a mono BTL application is illustrated in [Figure 10](#).

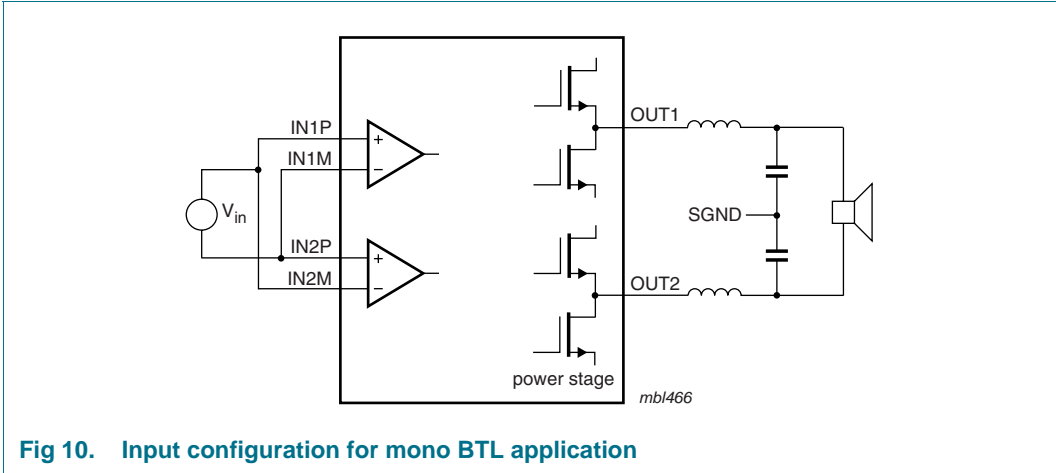



Fig 10. Input configuration for mono BTL application

## 9. Internal circuitry


Table 6. Internal circuitry

| Pin       |          | Symbol | Equivalent circuit <sup>[1]</sup> |
|-----------|----------|--------|-----------------------------------|
| TDA8954TH | TDA8954J |        |                                   |

7 1 OSC

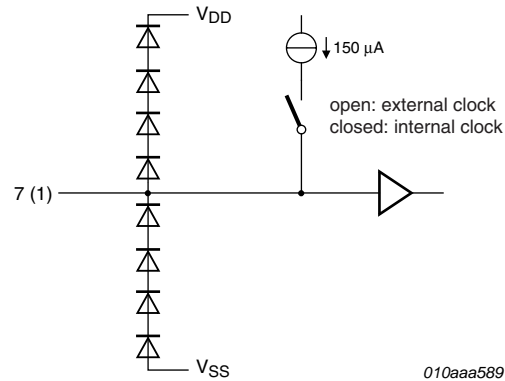


11 5 OSCREF



10 4 DIAG1

12 6 DIAG2



13 7 PROT

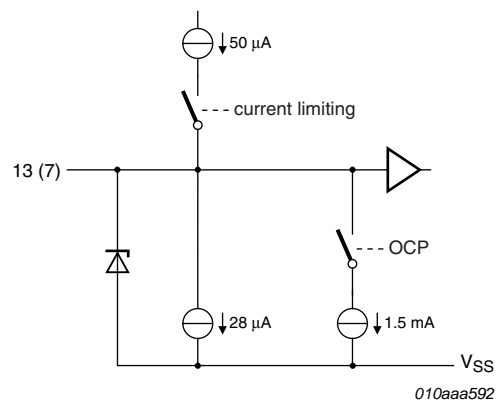




Table 6. Internal circuitry ...continued

| Pin       |          | Symbol | Equivalent circuit <sup>[1]</sup>           |
|-----------|----------|--------|---|
| TDA8954TH | TDA8954J |        |   |
| 4         | 21       | IN2M   | <p style="text-align: right;">010aaa593</p> |
| 5         | 22       | IN2P   |   |
| 8         | 2        | IN1P   |   |
| 9         | 3        | IN1M   |   |
| 6         | 23       | MODE   | <p style="text-align: right;">010aaa594</p> |
| 1         | 18       | VSSA   | <p style="text-align: right;">010aaa595</p> |
| 2         | 19       | SGND   |   |
| 3         | 20       | VDDA   |   |
| 14        | 8        | VDDP1  |   |
| 15        | 9        | BOOT1  |   |
| 16        | 10       | OUT1   |   |
| 17        | 11       | VSSP1  |   |
| 18        | 12       | STABI  |   |
| 20        | 13       | VSSP2  |   |
| 21        | 14       | OUT2   |   |
| 22        | 15       | BOOT2  |   |
| 23        | 16       | VDDP2  |   |

[1] Pin numbers in brackets are for the TDA8954J

## 10. Limiting values

**Table 7. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol         | Parameter                       | Conditions   | Min   | Max      | Unit |
|----------------|---------------------------------|--|-------|----------|------|
| $\Delta V$     | voltage difference              | $V_{DD} - V_{SS}$ ; Standby, Mute modes                | -     | 90       | V    |
| $I_{ORM}$      | repetitive peak output current  | maximum output current limiting; one channel driven    | 12    | -        | A    |
| $T_{stg}$      | storage temperature             |  | -55   | +150     | °C   |
| $T_{amb}$      | ambient temperature             |  | -40   | +85      | °C   |
| $T_j$          | junction temperature            |  | -     | 150      | °C   |
| $V_{OSC}$      | voltage on pin OSC              | relative to $V_{SSA}$                                  | 0     | SGND + 6 | V    |
| $V_{pu}$       | pull-up voltage                 | on pins DIAG1 and DIAG2; see <a href="#">Figure 13</a> | 0     | 5        | V    |
| $V_i$          | input voltage                   | referenced to SGND; on pins IN1P, IN1M, IN2P and IN2M  | -5    | +5       | V    |
| $V_{PROT}$     | voltage on pin PROT             | referenced to voltage on pin VSSA                      | 0     | 12       | V    |
| $V_{MODE}$     | voltage on pin MODE             | referenced to SGND                                     | 0     | 8        | V    |
| $I_i$          | input current                   | on pins DIAG1 and DIAG2                                | 0     | 1        | mA   |
| $V_{ESD}$      | electrostatic discharge voltage | Human Body Model (HBM)                                 | -2000 | +2000    | V    |
|                |                                 | Charged Device Model (CDM)                             | -500  | +500     | V    |
| $V_{PWM(p-p)}$ | peak-to-peak PWM voltage        | on pins OUT1 and OUT2                                  | -     | 120      | V    |

## 11. Thermal characteristics

**Table 8. Thermal characteristics**

| Symbol        | Parameter                                   | Conditions  | Typ | Unit |
|---------------|---|-------------|-----|------|
| $R_{th(j-a)}$ | thermal resistance from junction to ambient | in free air | 40  | K/W  |
| $R_{th(j-c)}$ | thermal resistance from junction to case    |             | 0.9 | K/W  |

## 12. Static characteristics

**Table 9. Static characteristics**

$V_{DD} = 41$  V;  $V_{SS} = -41$  V;  $f_{osc} = 335$  kHz;  $T_{amb} = 25$  °C; unless otherwise specified.

| Symbol        | Parameter                                 | Conditions                             | Min       | Typ | Max   | Unit |
|---------------|---|--|-----------|-----|-------|------|
| <b>Supply</b> |   |  |           |     |       |      |
| $V_{DD}$      | positive supply voltage                   | Operating mode                         | [1] 12.5  | 41  | 42.5  | V    |
| $V_{SS}$      | negative supply voltage                   | Operating mode                         | [2] -12.5 | -41 | -42.5 | V    |
| $V_{th(ovp)}$ | overvoltage protection threshold voltage  | Standby, Mute modes; $V_{DD} - V_{SS}$ | 85        | -   | 90    | V    |
| $V_{th(uvp)}$ | undervoltage protection threshold voltage | $V_{DD} - V_{SS}$                      | 20        | -   | 25    | V    |
| $V_{th(ubp)}$ | unbalance protection threshold voltage    |  | [3] -     | 33  | -     | %    |

**Table 9. Static characteristics ...continued** $V_{DD} = 41\text{ V}$ ;  $V_{SS} = -41\text{ V}$ ;  $f_{osc} = 335\text{ kHz}$ ;  $T_{amb} = 25\text{ °C}$ ; unless otherwise specified.

| Symbol  | Parameter                                       | Conditions  | Min    | Typ  | Max | Unit               |    |
|---|---|---|--------|------|-----|--------------------|----|
| $I_{DD(tot)}$                                       | total positive supply current                   | the sum of the currents through pins VDDA, VDDP1 and VDDP2<br>Operating mode; no load; no filter;<br>no RC-snubber network connected; | -      | 50   | 60  | mA                 |    |
| $I_{SS(tot)}$                                       | total negative supply current                   | the sum of the currents through pins VSSA, VSSP1 and VSSP2<br>Operating mode; no load; no filter;<br>no RC-snubber network connected; | -      | 65   | 75  | mA                 |    |
| $I_{stb}$   | standby current                                 |   | -      | 490  | 650 | $\mu\text{A}$      |    |
| <b>Mode select input; pin MODE</b>                  |   |   |        |      |     |                    |    |
| $V_{MODE}$  | voltage on pin MODE                             | referenced to SGND  | [4]    | 0    | -   | 8                  | V  |
|   |   | Standby mode  | [4][5] | 0    | -   | 0.8                | V  |
|   |   | Mute mode   | [4][5] | 2.2  | -   | 3.0                | V  |
|   |   | Operating mode  | [4][5] | 4.2  | -   | 5.5                | V  |
|   |   | Operating mode without TFB  | [4][5] | 6.6  | -   | 8                  |    |
| $I_I$   | input current                                   | $V_I = 5.5\text{ V}$  | -      | 110  | 150 | $\mu\text{A}$      |    |
| <b>Audio inputs; pins IN1M, IN1P, IN2P and IN2M</b> |   |   |        |      |     |                    |    |
| $V_I$   | input voltage                                   | DC input  | [4]    | -    | 0   | -                  | V  |
| <b>Amplifier outputs; pins OUT1 and OUT2</b>        |   |   |        |      |     |                    |    |
| $V_{O(offset)}$                                     | output offset voltage                           | SE; Mute mode   |        | -37  | -   | +37                | mV |
|   |   | SE; Operating mode  | [6]    | -150 | -   | +150               | mV |
|   |   | BTL; Mute mode  |        | -30  | -   | +30                | mV |
|   |   | BTL; Operating mode   | [6]    | -210 | -   | +210               | mV |
| <b>Stabilizer output; pin STABI</b>                 |   |   |        |      |     |                    |    |
| $V_{O(STABI)}$                                      | output voltage on pin STABI                     | Mute and Operating modes; with respect to VSSA  |        | 9.5  | 10  | 10.5               | V  |
| <b>Temperature protection</b>                       |   |   |        |      |     |                    |    |
| $T_{rst(warn)th\_fold}$                             | thermal foldback warning reset temperature      |   | -      | 138  | -   | $^{\circ}\text{C}$ |    |
| $T_{act(warn)th\_fold}$                             | thermal foldback warning activation temperature |   | -      | 139  | -   | $^{\circ}\text{C}$ |    |
| $T_{act(th\_fold)}$                                 | thermal foldback activation temperature         | $V_{MODE} < 5.5\text{ V}$   | -      | 145  | -   | $^{\circ}\text{C}$ |    |
| $T_{hg(th\_fold)}$                                  | thermal foldback half gain temperature          | $V_{MODE} < 5.5\text{ V}$ ; gain = 24 dB  | -      | 153  | -   | $^{\circ}\text{C}$ |    |
| $T_{act(th\_prot)}$                                 | thermal protection activation temperature       |   | -      | 154  | -   | $^{\circ}\text{C}$ |    |

[1]  $V_{DD}$  is the supply voltage on pins VDDP1, VDDP2 and VDDA.


[2]  $V_{SS}$  is the supply voltage on pins VSSP1, VSSP2 and VSSA.

[3] Unbalance protection activated when  $V_{DDA} > 2 \times |V_{SSA}|$  OR  $|V_{SSA}| > 2 \times V_{DDA}$ .

[4] With respect to SGND (0 V).

[5] The transition between Standby and Mute modes has hysteresis, while the slope of the transition between Mute and Operating modes is determined by the time-constant of the RC network on pin MODE; see [Figure 11](#).

- [6] DC output offset voltage is gradually applied to the output during the transition between Mute and Operating modes. The slope caused by any DC output offset is determined by the time-constant of the RC network on pin MODE.

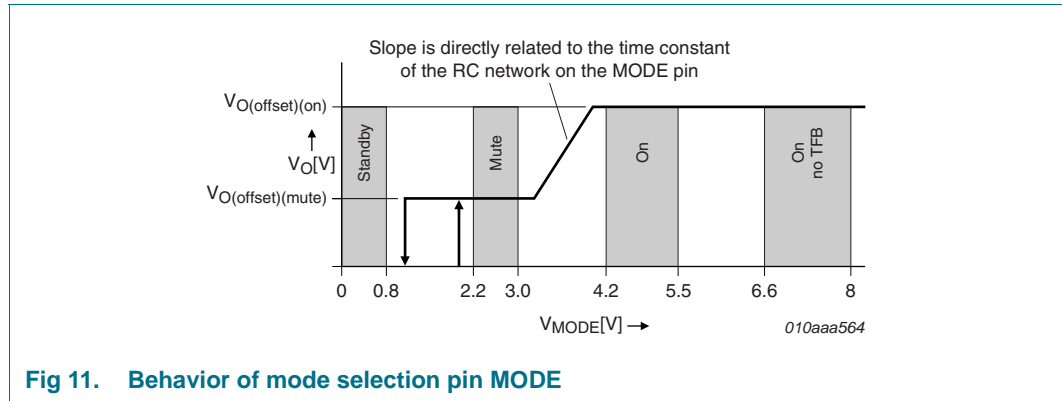

### 13. Dynamic characteristics

#### 13.1 Switching characteristics

Table 10. Dynamic characteristics

$V_{DD} = 41\text{ V}$ ;  $V_{SS} = -41\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol  | Parameter                    | Conditions                      | Min        | Typ        | Max      | Unit      |
|---|------------------------------|---------------------------------|------------|------------|----------|-----------|
| <b>Internal oscillator</b>                                      |                              |                                 |            |            |          |           |
| $f_{osc(typ)}$  | typical oscillator frequency | $R_{OSC} = 30.0\text{ k}\Omega$ | 290        | 335        | 365      | kHz       |
| $f_{osc}$   | oscillator frequency         |                                 | 250        | -          | 450      | kHz       |
| <b>External oscillator input or frequency tracking; pin OSC</b> |                              |                                 |            |            |          |           |
| $V_{OSC}$   | voltage on pin OSC           | HIGH-level                      | SGND + 4.5 | SGND + 5   | SGND + 6 | V         |
| $V_{trip}$  | trip voltage                 |                                 | -          | SGND + 2.5 | -        | V         |
| $f_{track}$   | tracking frequency           |                                 | [1] 500    | -          | 1000     | kHz       |
| $Z_i$   | input impedance              |                                 | 1          | -          | -        | $M\Omega$ |
| $C_i$   | input capacitance            |                                 | -          | -          | 15       | pF        |
| $t_{r(i)}$  | input rise time              | from SGND + 0 V to SGND + 5 V   | [2] -      | -          | 100      | ns        |

- [1] When using an external oscillator, the frequency  $f_{track}$  (500 kHz minimum, 1000 kHz maximum) will result in a PWM frequency  $f_{osc}$  (250 kHz minimum, 500 kHz maximum) due to the internal clock divider; see [Section 8.3](#).
- [2] When  $t_{r(i)} > 100\text{ ns}$ , the output noise floor will increase.

### 13.2 Stereo SE configuration characteristics

**Table 11. Dynamic characteristics**

$V_{DD} = 41\text{ V}$ ;  $V_{SS} = -41\text{ V}$ ;  $R_L = 4\ \Omega$ ;  $f_i = 1\text{ kHz}$ ;  $f_{osc} = 335\text{ kHz}$ ;  $R_{sL} < 0.1\ \Omega$ <sup>[1]</sup>;  $T_{amb} = 25\text{ °C}$ ; unless otherwise specified.

| Symbol          | Parameter                                  | Conditions  | Min  | Typ | Max  | Unit       |               |
|-----------------|--|---|------|-----|------|------------|---------------|
| $P_o$           | output power                               | $L = 15\ \mu\text{H}$ ; $C_{LC} = 680\text{ nF}$ ; $T_j = 85\text{ °C}$ | [2]  |     |      |            |               |
|                 |  | THD = 0.5 %; $R_L = 4\ \Omega$  | -    | 160 | -    | W          |               |
|                 |  | THD = 10 %; $R_L = 4\ \Omega$   | -    | 210 | -    | W          |               |
|                 |  | THD = 10 %; $R_L = 3\ \Omega$ ; $V_P = \pm 39\text{ V}$                 | [3]  | -   | 235  | -          | W             |
| THD             | total harmonic distortion                  | $P_o = 1\text{ W}$ ; $f_i = 1\text{ kHz}$                               | [4]  | -   | 0.03 | 0.1 %      |               |
|                 |  | $P_o = 1\text{ W}$ ; $f_i = 6\text{ kHz}$                               | [4]  | -   | 0.05 | -          | %             |
| $G_{V(d)}$      | closed-loop voltage gain                   |   | 29   | 30  | 31   | dB         |               |
| SVRR            | supply voltage ripple rejection            | between pins VDDPn and SGND   |      |     |      |            |               |
|                 |  | Operating mode; $f_i = 100\text{ Hz}$                                   | [5]  | -   | 90   | -          | dB            |
|                 |  | Operating mode; $f_i = 1\text{ kHz}$                                    | [5]  | -   | 70   | -          | dB            |
|                 |  | Mute mode; $f_i = 100\text{ Hz}$  | [5]  | -   | 75   | -          | dB            |
|                 |  | Standby mode; $f_i = 100\text{ Hz}$                                     | [5]  | -   | 120  | -          | dB            |
|                 |  | between pins VSSPn and SGND   |      |     |      |            |               |
|                 |  | Operating mode; $f_i = 100\text{ Hz}$                                   | [5]  | -   | 80   | -          | dB            |
|                 |  | Operating mode; $f_i = 1\text{ kHz}$                                    | [5]  | -   | 60   | -          | dB            |
|                 |  | Mute mode; $f_i = 100\text{ Hz}$  | [5]  | -   | 80   | -          | dB            |
|                 |  | Standby mode; $f_i = 100\text{ Hz}$                                     | [5]  | -   | 115  | -          | dB            |
| $Z_i$           | input impedance                            | between an input pin and SGND   | 45   | 56  | -    | k $\Omega$ |               |
| $V_{n(o)}$      | output noise voltage                       | Operating mode; inputs shorted  | [6]  | -   | 160  | -          | $\mu\text{V}$ |
|                 |  | Mute mode   | [7]  | -   | 85   | -          | $\mu\text{V}$ |
| $\alpha_{cs}$   | channel separation                         |   | [8]  | -   | 70   | -          | dB            |
| $ \Delta G_V $  | voltage gain difference                    |   | -    | -   | 1    | dB         |               |
| $\alpha_{mute}$ | mute attenuation                           | $f_i = 1\text{ kHz}$ ; $V_i = 2\text{ V (RMS)}$                         | [9]  | -   | 75   | -          | dB            |
| CMRR            | common mode rejection ratio                | $V_{i(CM)} = 1\text{ V (RMS)}$  | -    | 75  | -    | dB         |               |
| $\eta_{po}$     | output power efficiency                    | SE, $R_L = 4\ \Omega$   | -    | 93  | -    | %          |               |
|                 |  | SE, $R_L = 3\ \Omega$   | -    | 90  | -    | %          |               |
|                 |  | BTL, $R_L = 8\ \Omega$  | -    | 93  | -    | %          |               |
| $R_{DSon(hs)}$  | high-side drain-source on-state resistance |   | [10] | -   | 110  | -          | m $\Omega$    |
| $R_{DSon(ls)}$  | low-side drain-source on-state resistance  |   | [10] | -   | 105  | -          | m $\Omega$    |

- [1]  $R_{sL}$  is the series resistance of the low-pass LC filter inductor used in the application.
- [2] Output power is measured indirectly; based on  $R_{DSon}$  measurement; see [Section 14.3](#).
- [3] One channel driven at maximum output power; the other channel driven at one eighth maximum output power.
- [4] THD measured between 22 Hz and 20 kHz, using AES17 20 kHz brick wall filter.
- [5]  $V_{ripple} = V_{ripple(max)} = 2\text{ V (p-p)}$ ; measured independently between VDDPn and SGND and between VSSPn and SGND.
- [6] 22 Hz to 20 kHz, using AES17 20 kHz brick wall filter.
- [7] 22 Hz to 20 kHz, using AES17 20 kHz brick wall filter.
- [8]  $P_o = 1\text{ W}$ ;  $f_i = 1\text{ kHz}$ .
- [9]  $V_i = V_{i(max)} = 1\text{ V (RMS)}$ ;  $f_i = 1\text{ kHz}$ .
- [10] Leads and bond wires included.

### 13.3 Mono BTL application characteristics

**Table 12. Dynamic characteristics**

$V_{DD} = 41\text{ V}$ ;  $V_{SS} = -41\text{ V}$ ;  $R_L = 8\ \Omega$ ;  $f_i = 1\text{ kHz}$ ;  $f_{osc} = 335\text{ kHz}$ ;  $R_{sL} < 0.1\ \Omega$  [1];  $T_{amb} = 25\text{ °C}$ ; unless otherwise specified.

| Symbol          | Parameter                       | Conditions  | Min | Typ | Max  | Unit       |               |
|-----------------|---------------------------------|---|-----|-----|------|------------|---------------|
| $P_o$           | output power                    | $T_j = 85\text{ °C}$ ; $L_{LC} = 15\ \mu\text{H}$ ; $C_{LC} = 680\text{ nF}$ [2]<br>(see Figure 13) |     |     |      |            |               |
|                 |                                 | THD = 0.5 %; $R_L = 8\ \Omega$  | -   | 330 | -    | W          |               |
|                 |                                 | THD = 10 %; $R_L = 8\ \Omega$   | -   | 420 | -    | W          |               |
| THD             | total harmonic distortion       | $P_o = 1\text{ W}$ ; $f_i = 1\text{ kHz}$   | [3] | -   | 0.03 | 0.1 %      |               |
|                 |                                 | $P_o = 1\text{ W}$ ; $f_i = 6\text{ kHz}$   | [3] | -   | 0.05 | - %        |               |
| $G_{v(cl)}$     | closed-loop voltage gain        |   | -   | 36  | -    | dB         |               |
| SVRR            | supply voltage ripple rejection | between pin VDDPn and SGND  |     |     |      |            |               |
|                 |                                 | Operating mode; $f_i = 100\text{ Hz}$   | [5] | -   | 80   | -          | dB            |
|                 |                                 | Operating mode; $f_i = 1\text{ kHz}$  | [5] | -   | 80   | -          | dB            |
|                 |                                 | Mute mode; $f_i = 100\text{ Hz}$  | [5] | -   | 95   | -          | dB            |
|                 |                                 | Standby mode; $f_i = 100\text{ Hz}$   | [5] | -   | 120  | -          | dB            |
|                 |                                 | between pin VSSPn and SGND  |     |     |      |            |               |
|                 |                                 | Operating mode; $f_i = 100\text{ Hz}$   | [5] | -   | 75   | -          | dB            |
|                 |                                 | Operating mode; $f_i = 1\text{ kHz}$  | [5] | -   | 75   | -          | dB            |
|                 |                                 | Mute mode; $f_i = 100\text{ Hz}$  | [5] | -   | 90   | -          | dB            |
|                 |                                 | Standby mode; $f_i = 100\text{ Hz}$   | [5] | -   | 130  | -          | dB            |
| $Z_i$           | input impedance                 | measured between one of the input pins and SGND   | 45  | 56  | -    | k $\Omega$ |               |
| $V_{n(o)}$      | output noise voltage            | Operating mode; inputs shorted  | [5] | -   | 190  | -          | $\mu\text{V}$ |
|                 |                                 | Mute mode   | [6] | -   | 45   | -          | $\mu\text{V}$ |
| $\alpha_{mute}$ | mute attenuation                | $f_i = 1\text{ kHz}$ ; $V_i = 2\text{ V (RMS)}$   | [7] | -   | 75   | -          | dB            |
| CMRR            | common mode rejection ratio     | $V_{i(CM)} = 1\text{ V (RMS)}$  | -   | 75  | -    | dB         |               |

[1]  $R_{sL}$  is the series resistance of the low-pass LC filter inductor used in the application.

[2] Output power is measured indirectly; based on  $R_{DSon}$  measurement; see Section 14.3.

[3] THD measured between 22 Hz and 20 kHz, using AES17 20 kHz brick wall filter.

[4]  $V_{ripple} = V_{ripple(max)} = 2\text{ V (p-p)}$ .

[5] 22 Hz to 20 kHz, using an AES17 20 kHz brick wall filter; low noise due to BD modulation.

[6] 22 Hz to 20 kHz, using an AES17 20 kHz brick wall filter.

[7]  $V_i = V_{i(max)} = 1\text{ V (RMS)}$ ;  $f_i = 1\text{ kHz}$ .

## 14. Application information

### 14.1 Mono BTL application

When using the power amplifier in a mono BTL application, the inputs of the two channels must be connected in anti-parallel and the phase of one of the inputs must be inverted; see [Figure 10](#). In principle, the loudspeaker can be connected between the outputs of the two single-ended demodulation filters.

### 14.2 Pin MODE

To ensure a pop noise-free start-up, an RC time-constant must be applied to pin MODE. The bias-current setting of the VI converter input is directly related to the voltage on pin MODE. In turn the bias-current setting of the VI converters is directly related to the DC output offset voltage. A slow dV/dt on pin MODE results in a slow dV/dt for the DC output offset voltage, ensuring a pop noise-free transition between Mute and Operating modes. A time-constant of 500 ms is sufficient to guarantee pop noise-free start-up; see [Figure 4](#), [Figure 5](#) and [Figure 11](#) for more information.

### 14.3 Estimating the output power

#### 14.3.1 Single-Ended (SE)

Maximum output power:

$$P_{o(0.5\%)} = \frac{\left[ \frac{R_L}{R_L + R_{DSon(hs)} + R_{s(L)}} \times 0.5(V_{DD} - V_{SS}) \times (1 - t_{w(min)} \times 0.5f_{osc}) \right]^2}{2R_L} \quad (1)$$

Maximum output current is internally limited to 12 A:

$$I_{o(peak)} = \frac{0.5(V_{DD} - V_{SS}) \times (1 - t_{w(min)} \times 0.5f_{osc})}{R_L + R_{DSon(hs)} + R_{s(L)}} \quad (2)$$

Where:

- $P_{o(0.5\%)}$ : output power at the onset of clipping
- $R_L$ : load impedance
- $R_{DSon(hs)}$ : high-side  $R_{DSon}$  of power stage output DMOS (temperature dependent)
- $R_{s(L)}$ : series impedance of the filter coil
- $t_{w(min)}$ : minimum pulse width (typical 150 ns; temperature dependent)
- $f_{osc}$ : oscillator frequency

**Remark:** Note that  $I_{o(peak)}$  should be less than 12 A ([Section 8.4.2](#)).  $I_{o(peak)}$  is the sum of the current through the load and the ripple current. The value of the ripple current is dependent on the coil inductance and the voltage drop across the coil.

### 14.3.2 Bridge-Tied Load (BTL)

Maximum output power:

$$P_{o(0.5\%)} = \frac{\left[ \frac{R_L}{R_L + R_{DSon(hs)} + R_{DSon(ls)}} \times (V_{DD} - V_{SS}) \times (1 - t_{w(min)} \times 0.5f_{osc}) \right]^2}{2R_L} \quad (3)$$

Maximum output current internally limited to 12 A:

$$I_{o(peak)} = \frac{(V_{DD} - V_{SS}) \times (1 - t_{w(min)} \times 0.5f_{osc})}{R_L + (R_{DSon(hs)} + R_{DSon(ls)}) + 2R_{s(L)}} \quad (4)$$

Where:

- $P_{o(0.5\%)}$ : output power at the onset of clipping
- $R_L$ : load impedance
- $R_{DSon(hs)}$ : high-side  $R_{DSon}$  of power stage output DMOS (temperature dependent)
- $R_{DSon(ls)}$ : low-side  $R_{DSon}$  of power stage output DMOS (temperature dependent)
- $R_{s(L)}$ : series impedance of the filter coil
- $t_{w(min)}$ : minimum pulse width (typical 150 ns, temperature dependent)
- $f_{osc}$ : oscillator frequency

**Remark:** Note that  $I_{o(peak)}$  should be less than 12 A; see [Section 8.4.2](#).  $I_{o(peak)}$  is the sum of the current through the load and the ripple current. The value of the ripple current is dependent on the coil inductance and the voltage drop across the coil.

## 14.4 External clock

To ensure duty cycle-independent operation, the external clock frequency is divided by two internally. The external clock frequency is therefore twice the internal clock frequency (typically  $2 \times 335 \text{ kHz} = 670 \text{ kHz}$ ).

If several Class D amplifiers are used in a single application, it is recommended that all the devices run at the same switching frequency. This can be achieved by connecting the OSC pins together and feeding them from an external oscillator. When using an external oscillator, it is necessary to force pin OSC to a DC level above SGND. This disables the internal oscillator and causes the PWM to switch at half the external clock frequency.

The internal oscillator requires an external resistor  $R_{OSC}$ , connected between pin OSC and pin OSCREF.  $R_{OSC}$  must be removed when using an external oscillator.

The noise generated by the internal oscillator is supply voltage dependent. An external low-noise oscillator is recommended for low-noise applications running at high supply voltages.

## 14.5 Heatsink requirements


An external heatsink must be connected to the TDA8954.

[Equation 5](#) defines the relationship between maximum power dissipation before activation of TFB and total thermal resistance from junction to ambient.



$$R_{th(j-a)} = \frac{T_j - T_{amb}}{P} \tag{5}$$

Power dissipation (P) is determined by the efficiency of the TDA8954.

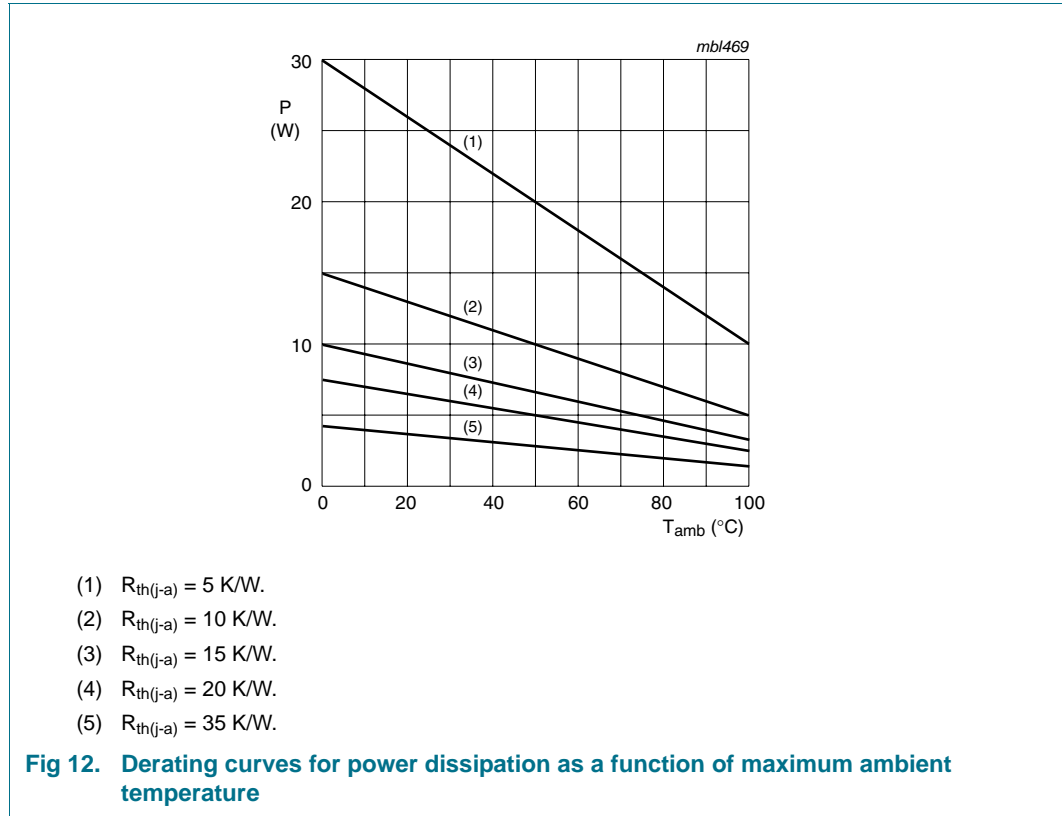

In the following example, a heatsink calculation is made for an 4 Ω SE application with a ±30 V supply:

The audio signal has a crest factor of 10 (the ratio between peak power and average power (20 dB); this means that the average output power is  $\frac{1}{10}$  of the peak power. Thus, the peak RMS output power level is the 0.5 % THD level, i.e. 92.5 W per channel. The average power is then  $\frac{1}{10} \times 92.5 \text{ W} = 9.25 \text{ W}$  per channel. The dissipated power at an output power of 9.25 W is approximately 9.5 W.

When the maximum expected ambient temperature is 50 °C, the total  $R_{th(j-a)}$  becomes

$$\frac{(148 - 50)}{9.5} = 10.3 \text{ K/W}$$

$$R_{th(j-a)} = R_{th(j-c)} + R_{th(c-h)} + R_{th(h-a)}$$

$R_{th(j-c)}$  (thermal resistance from junction to case) = 0.9 K/W

$R_{th(c-h)}$  (thermal resistance from case to heatsink) = 0.5 K/W to 1 K/W (dependent on mounting)

So the thermal resistance between heatsink and ambient temperature is:

$$R_{th(h-a)} \text{ (thermal resistance from heatsink to ambient)} = 10.3 - (0.9 + 1) = 8.4 \text{ K/W}$$

The derating curves for power dissipation (for several  $R_{th(j-a)}$  values) are illustrated in [Figure 12](#). A maximum junction temperature  $T_j = 150 \text{ }^\circ\text{C}$  is taken into account. The maximum allowable power dissipation for a given heatsink size can be derived, or the required heatsink size can be determined, at a required power dissipation level; see [Figure 12](#).

## 14.6 Pumping effects

In a typical stereo single-ended configuration, the TDA8954 is supplied by a symmetrical supply voltage (e.g.  $V_{DD} = +41 \text{ V}$  and  $V_{SS} = -41 \text{ V}$ ). When the amplifier is used in an SE configuration, a 'pumping effect' can occur. During one switching interval, energy is taken from one supply (e.g.  $V_{DD}$ ), while a part of that energy is returned to the other supply line (e.g.  $V_{SS}$ ) and vice versa. When the voltage supply source cannot sink energy, the voltage across the output capacitors of that voltage supply source increases and the supply voltage is pumped to higher levels. The voltage increase caused by the pumping effect depends on:

- Speaker impedance
- Supply voltage
- Audio signal frequency
- Value of supply line decoupling capacitors
- Source and sink currents of other channels


Pumping effects should be minimized to prevent the malfunctioning of the audio amplifier and/or the voltage supply source. Amplifier malfunction due to the pumping effect can trigger UVP, OVP or UBP.

The most effective way to avoid pumping effects is to connect the TDA8954 in a mono full-bridge configuration. In the case of stereo single-ended applications, it is advised to connect the inputs in anti-phase (see [Section 8.5 on page 14](#)). The power supply can also be adapted; for example, by increasing the values of the supply line decoupling capacitors.

## 14.7 Application schematic

Notes on the application schematic:



- Connect a solid ground plane around the switching amplifier to avoid emissions
- Place 100 nF capacitors as close as possible to the TDA8954 power supply pins
- Connect the heatsink to the ground plane or to VSSPn using a 100 nF capacitor
- Use a thermally conductive, electrically non-conductive, Sil-Pad between the TDA8954 heat spreader and the external heatsink
- The heat spreader of the TDA8954 is internally connected to VSSA
- Use differential inputs for the most effective system level audio performance with unbalanced signal sources. In case of hum due to floating inputs, connect the shielding or source ground to the amplifier ground.


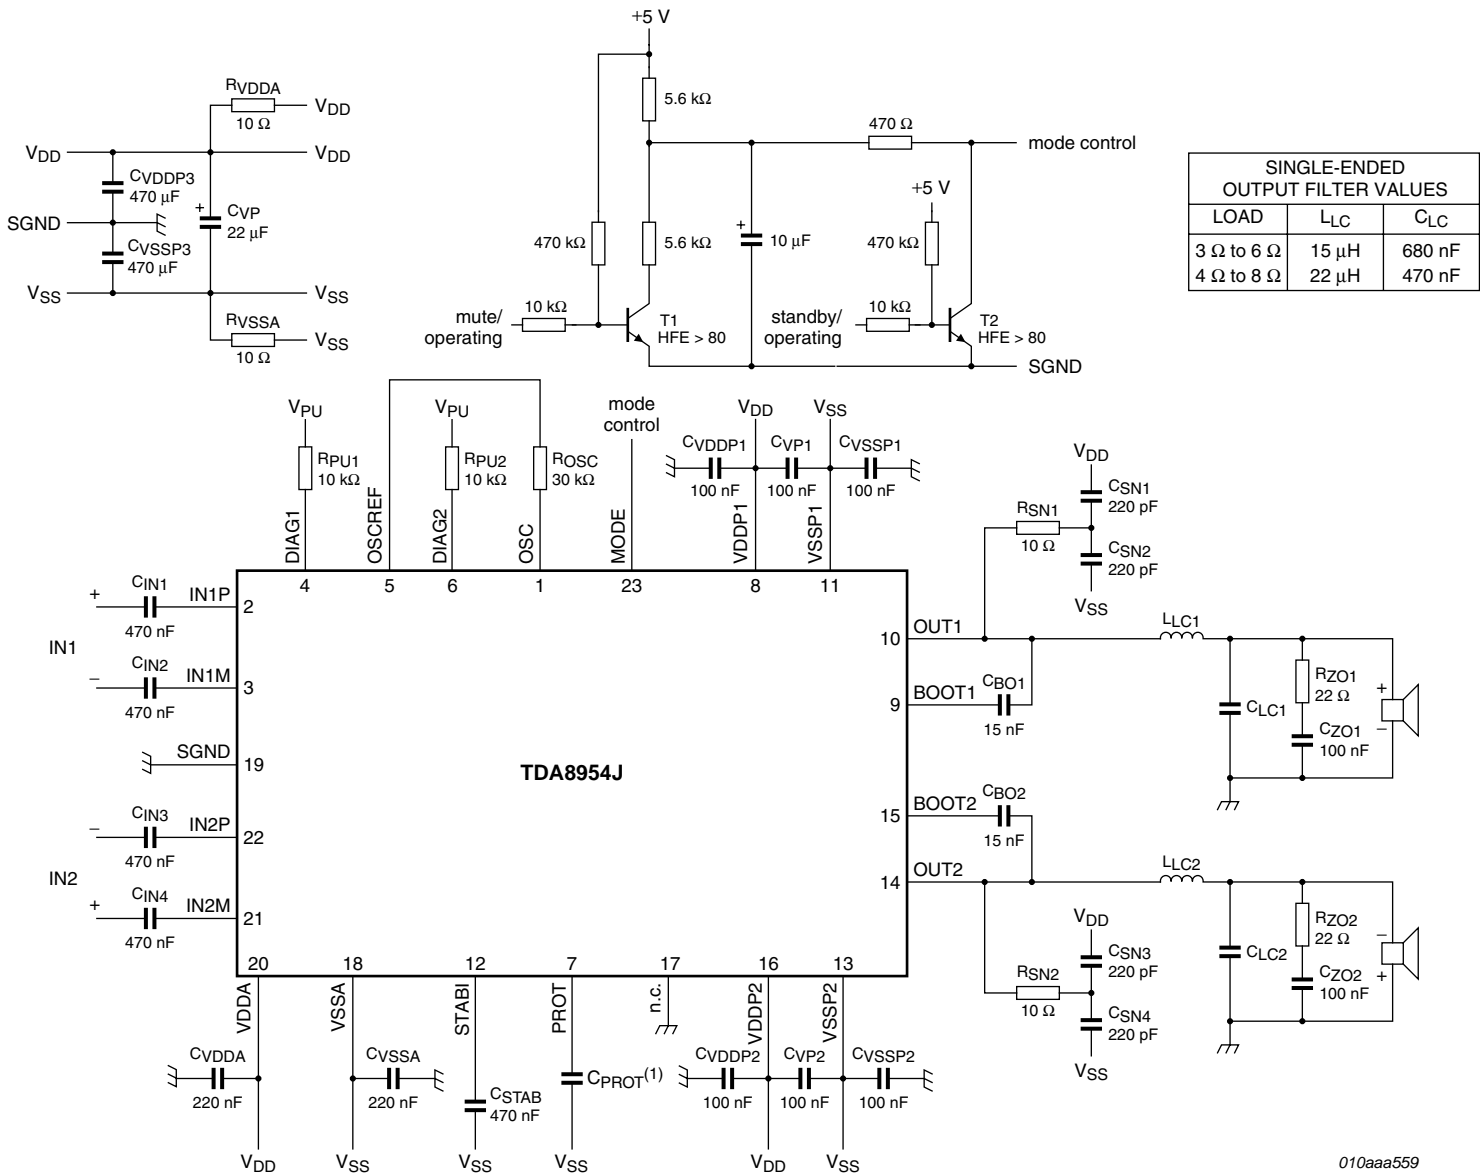




(1) The value of C<sub>PROT</sub> can be in the range 10 pF to 220 pF (see [Section 8.4.2](#))



Fig 13. Typical application diagram



14.8 Curves measured in reference design (demo board TDA8954J)

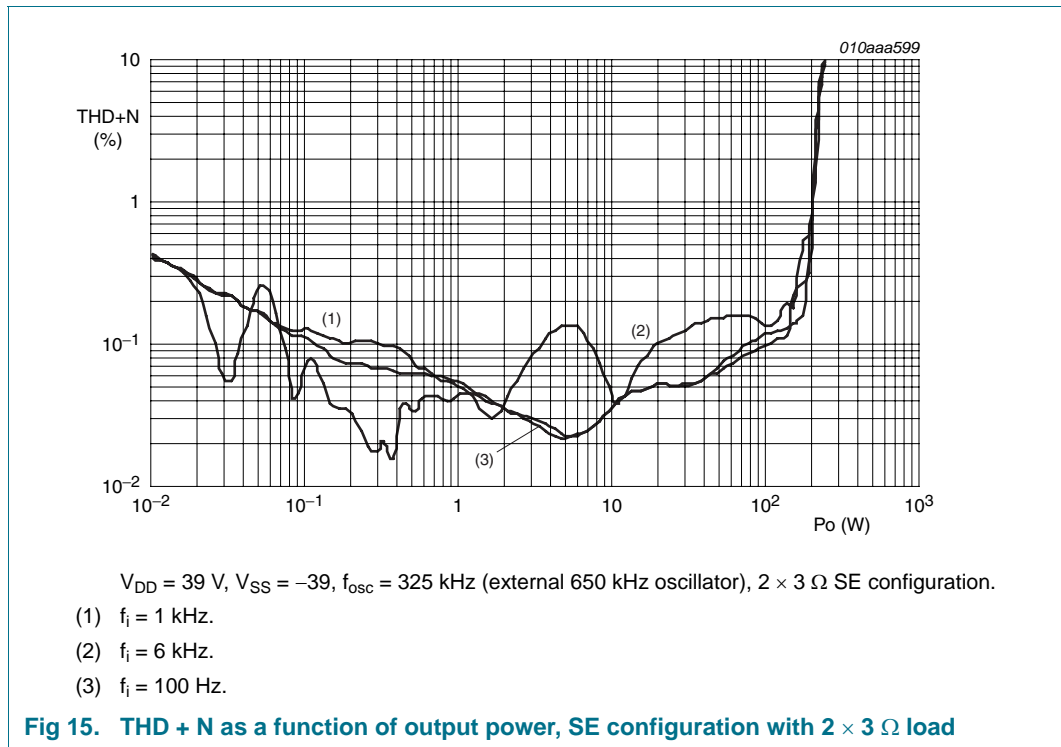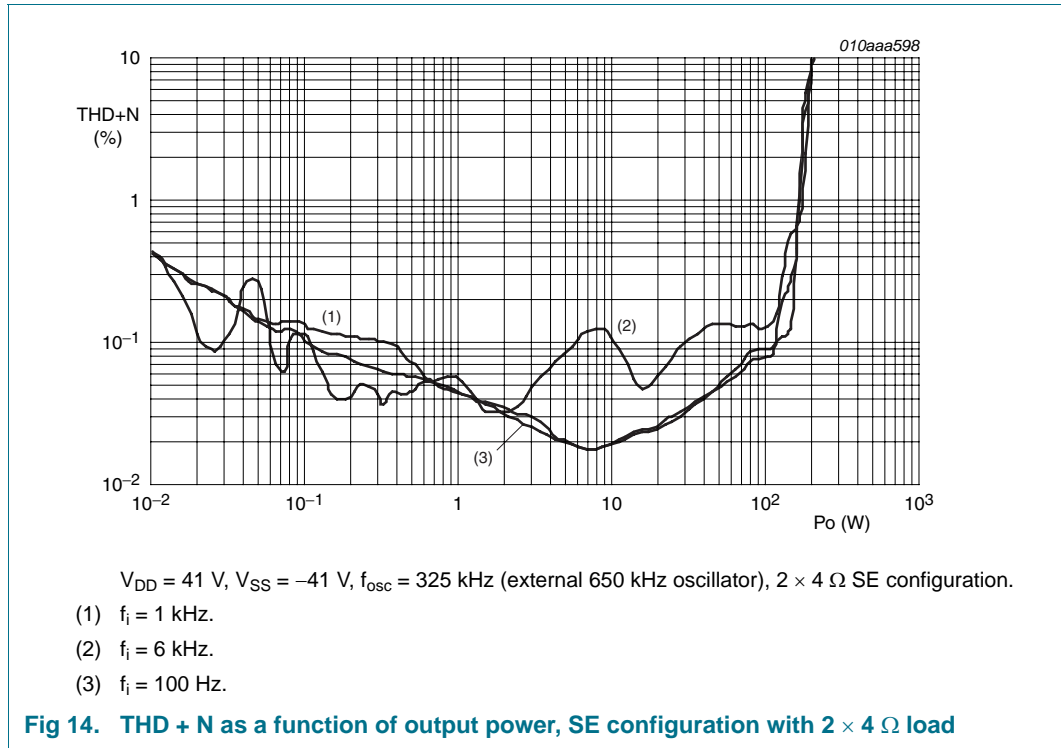

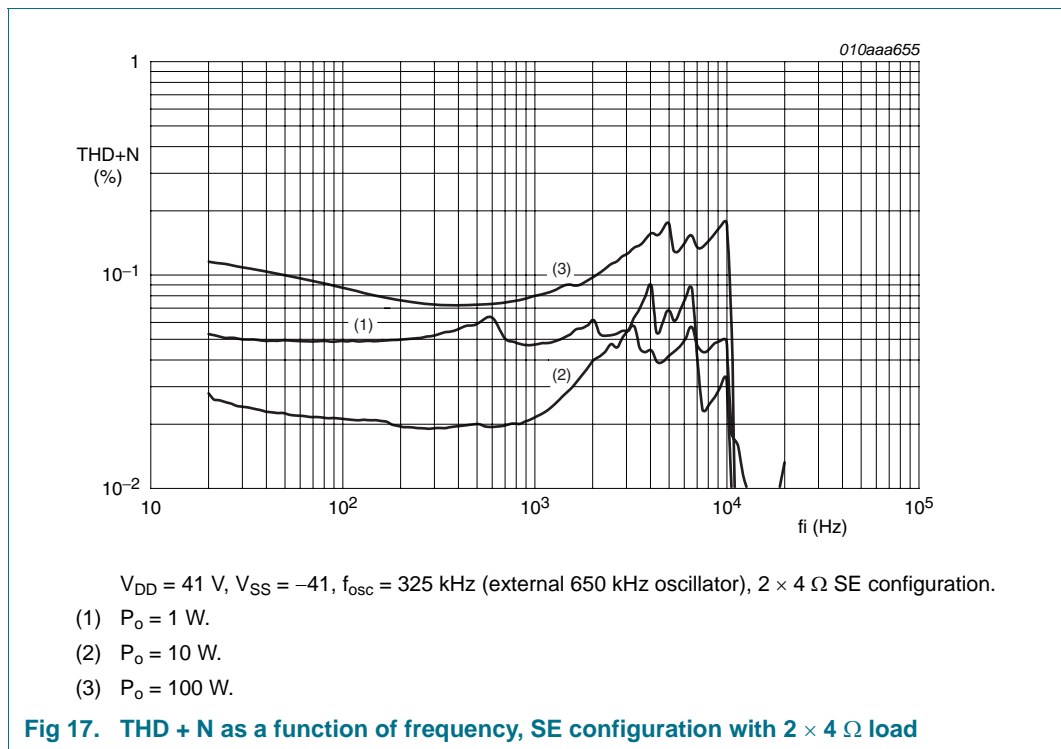
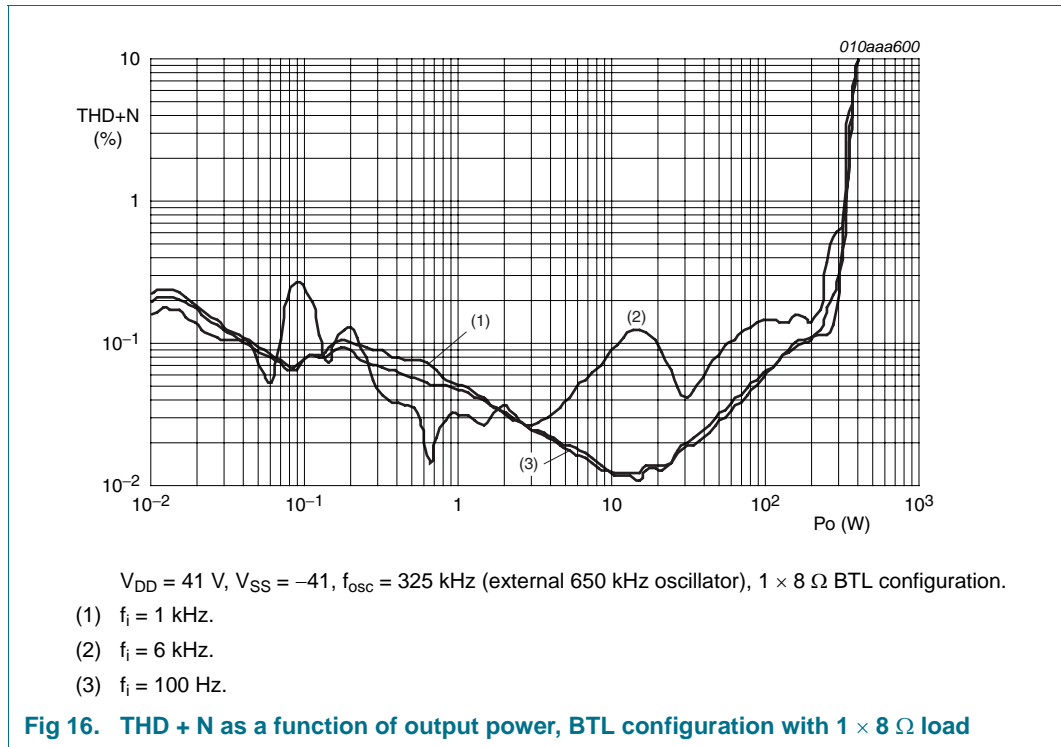


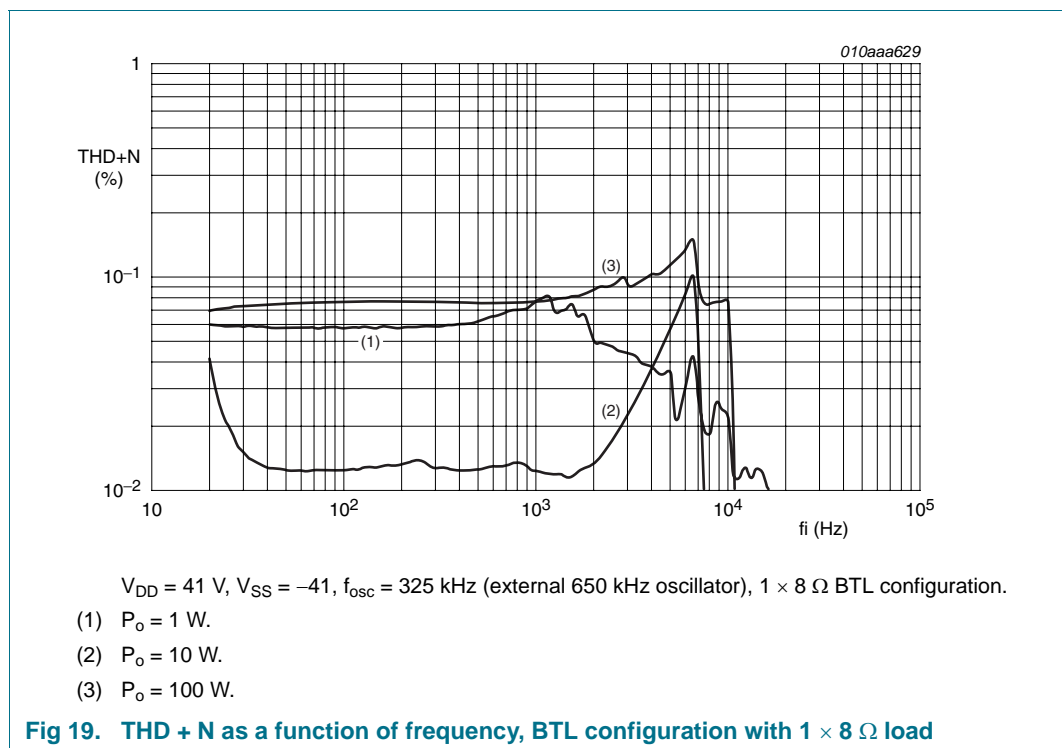
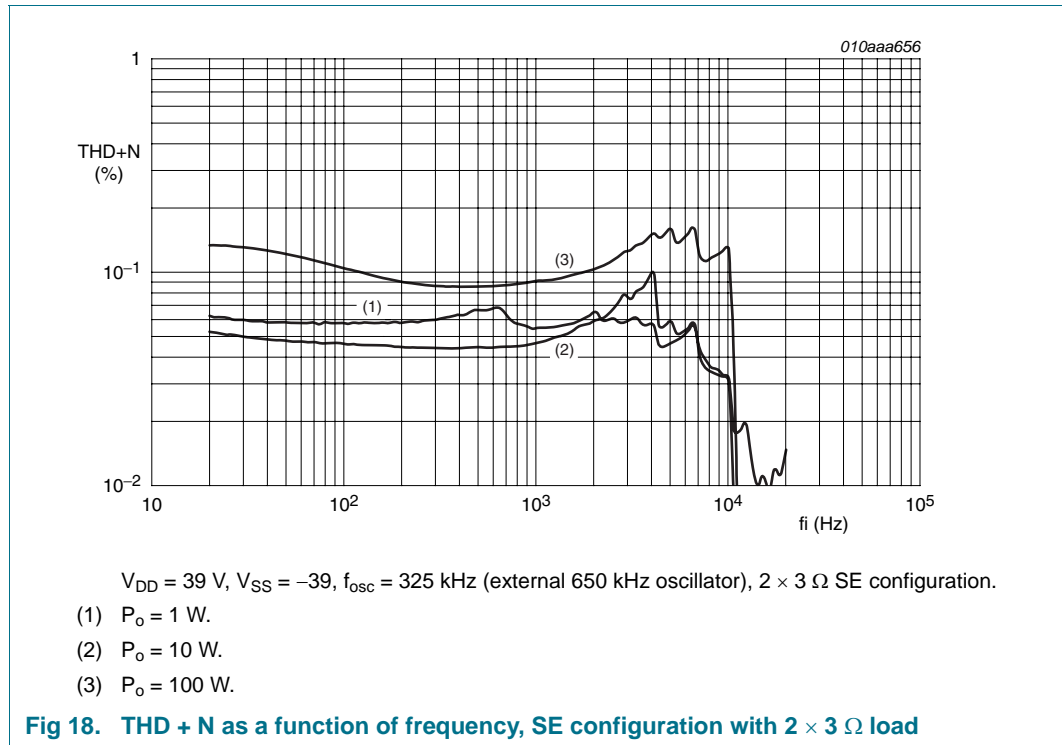


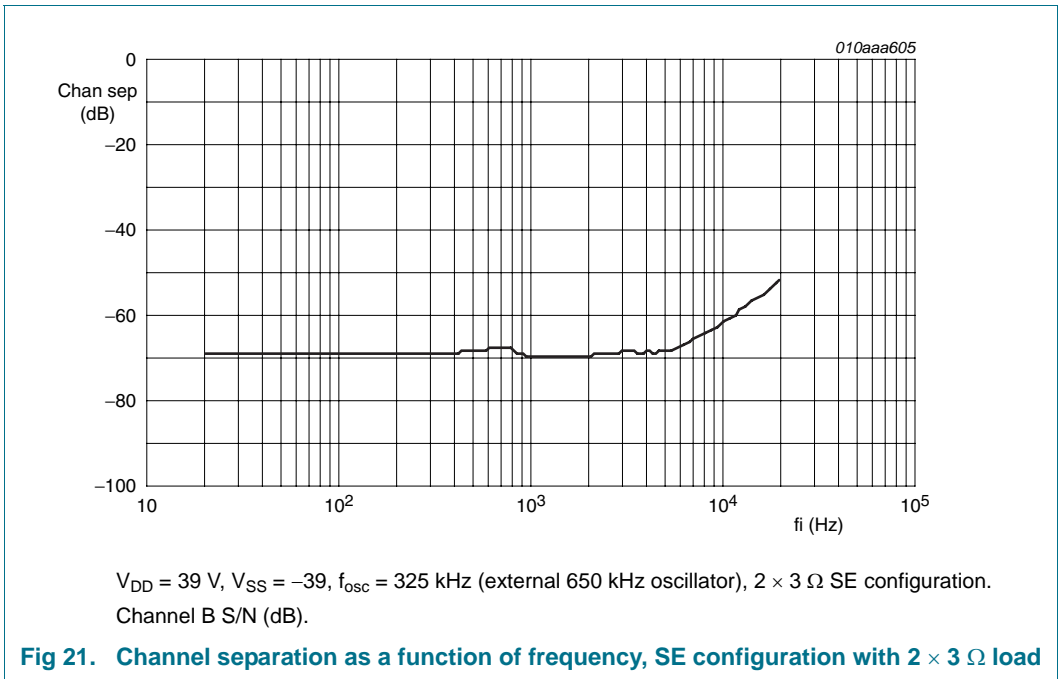
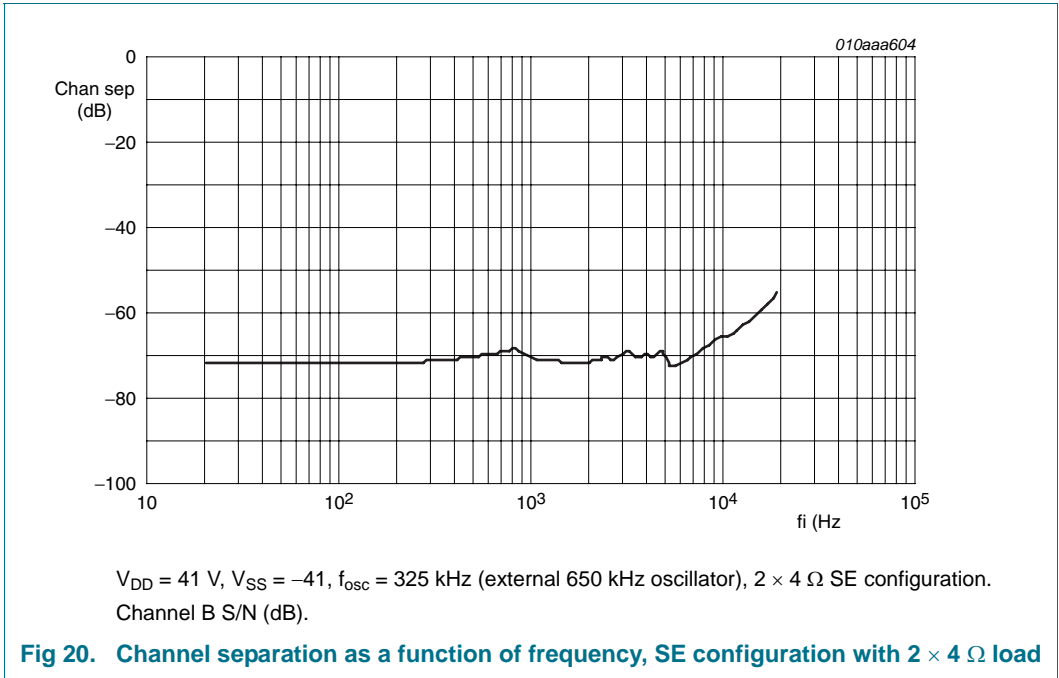


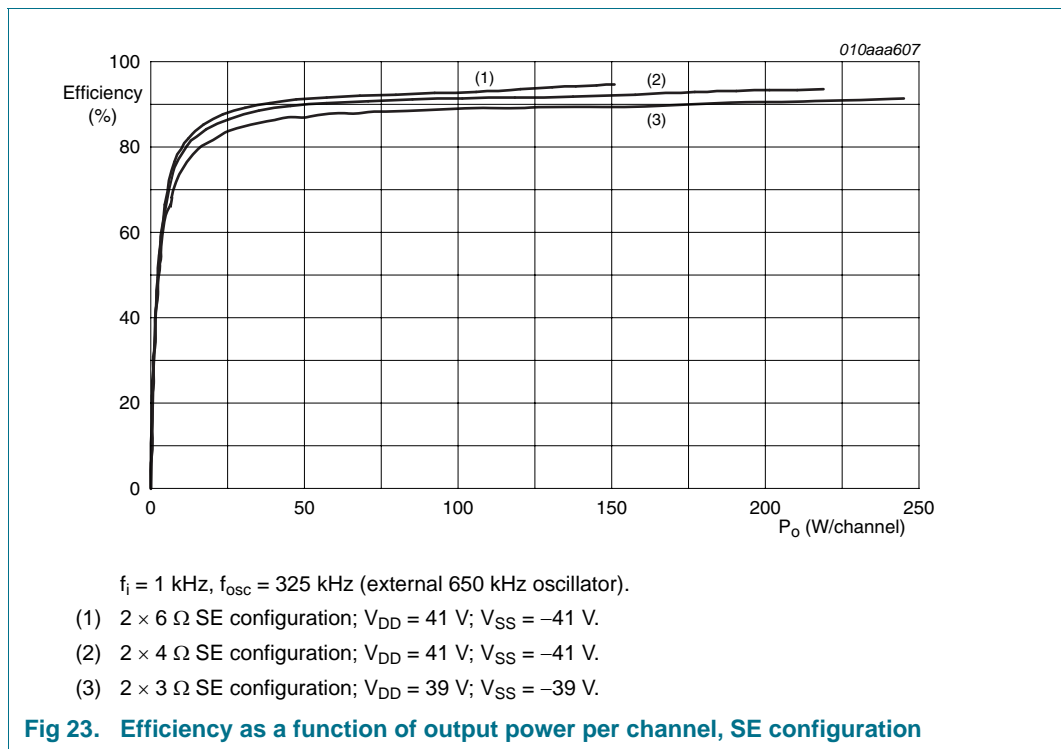
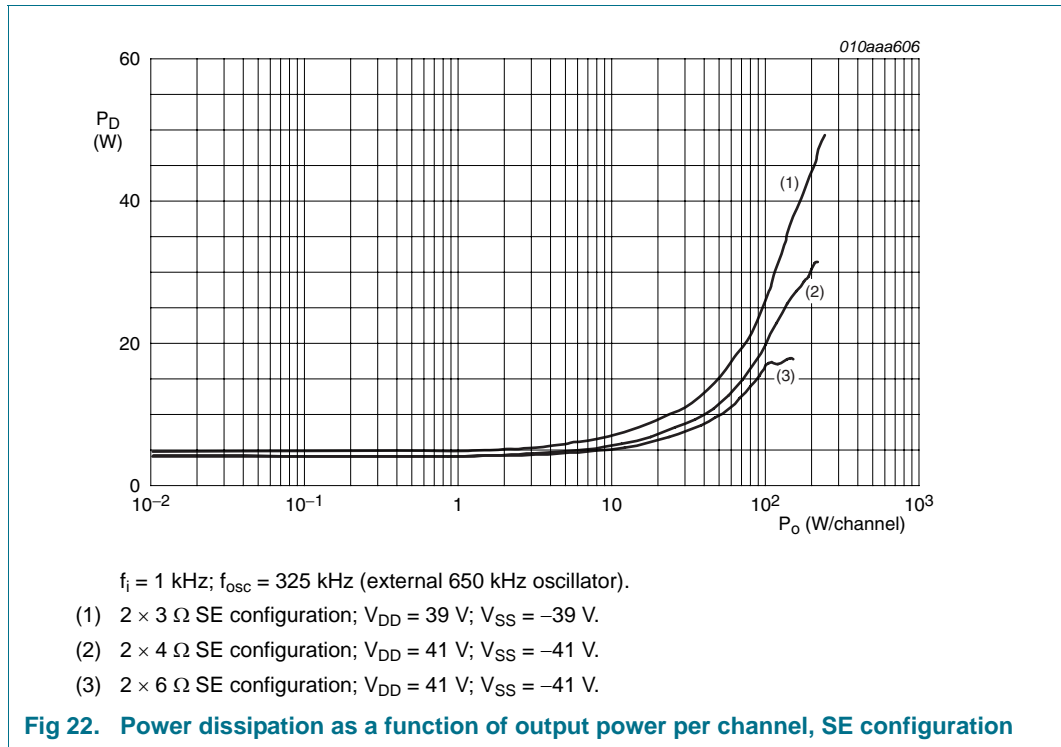






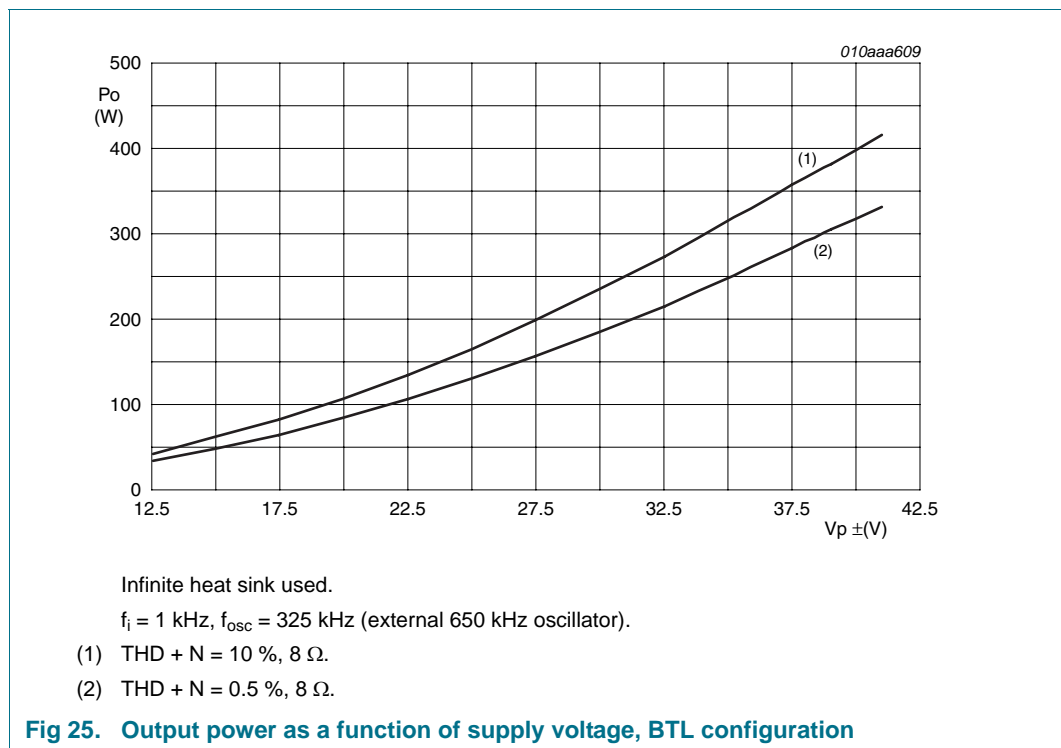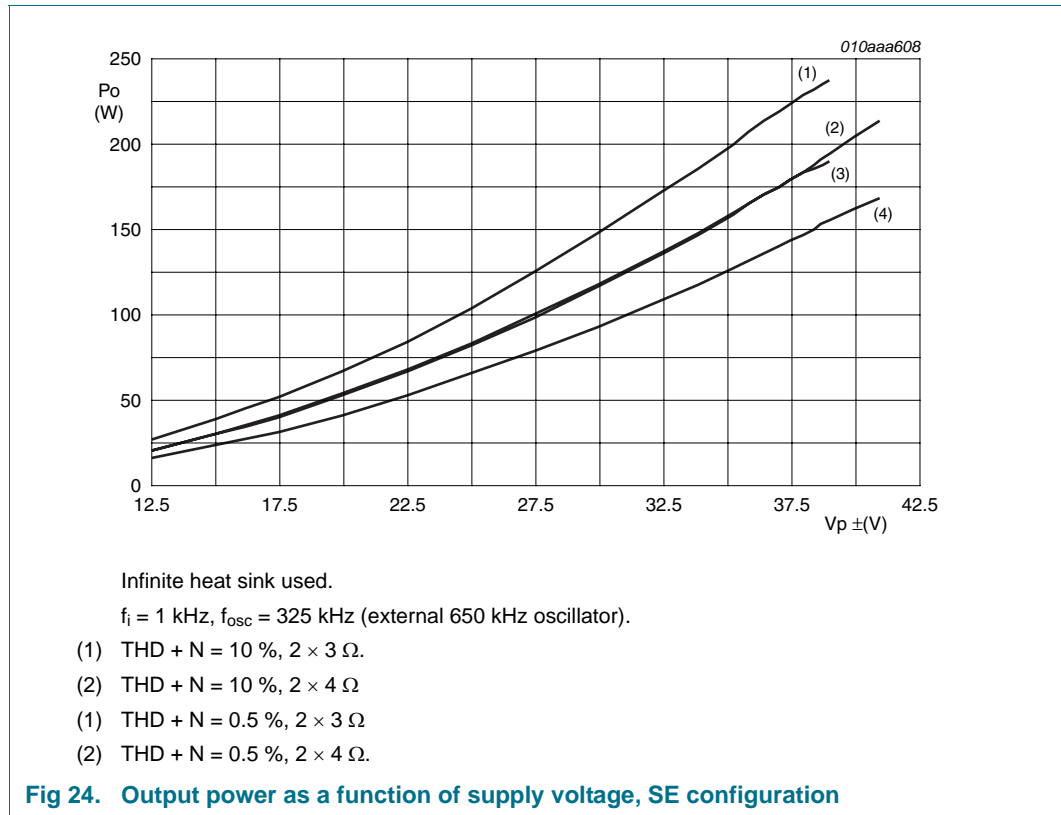

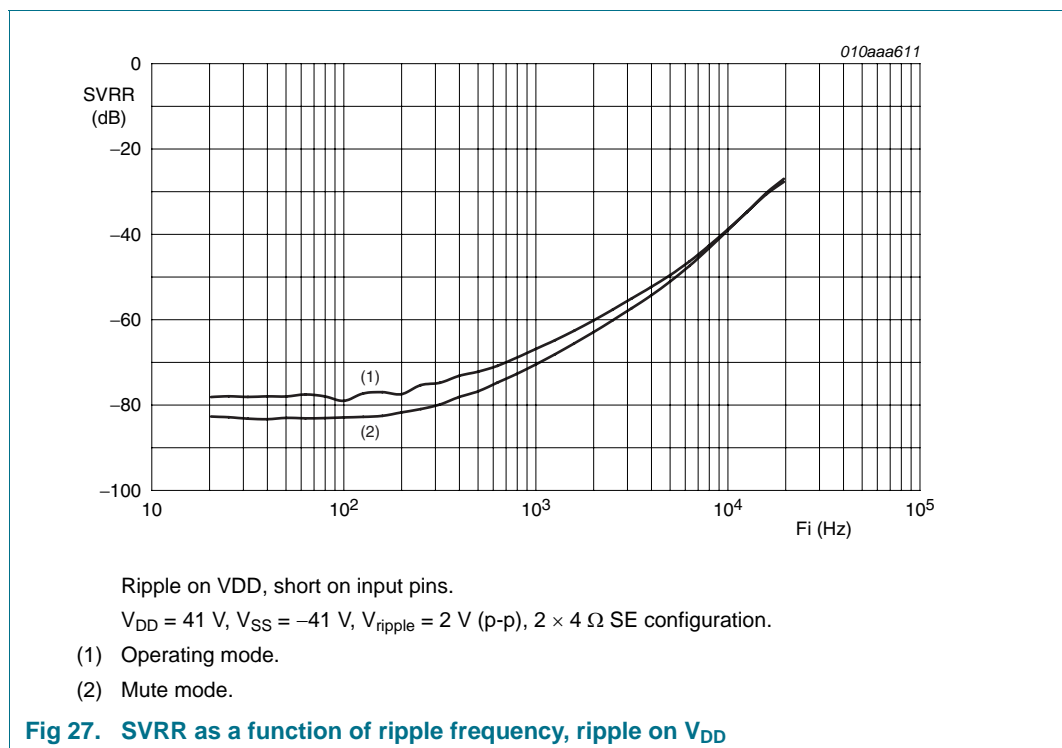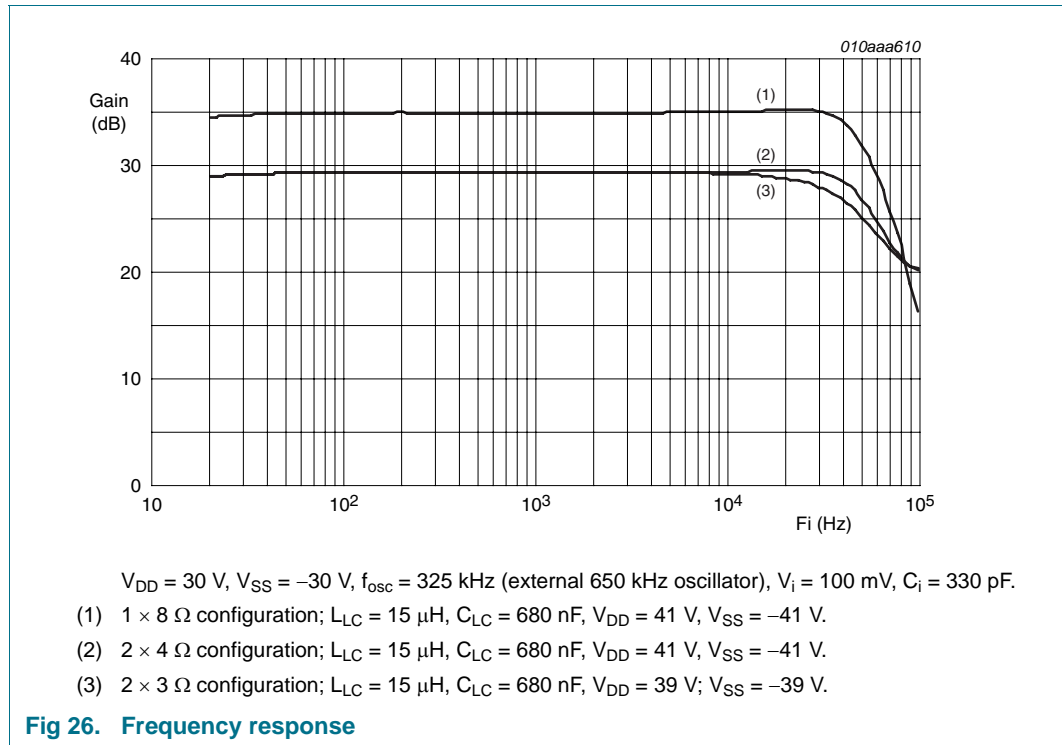

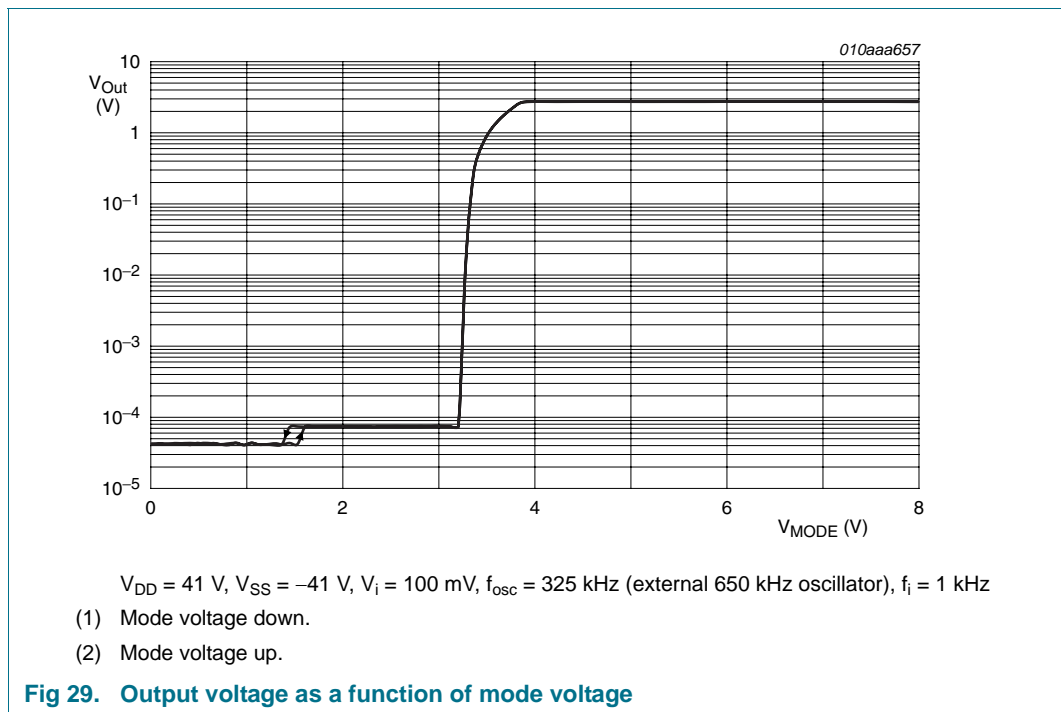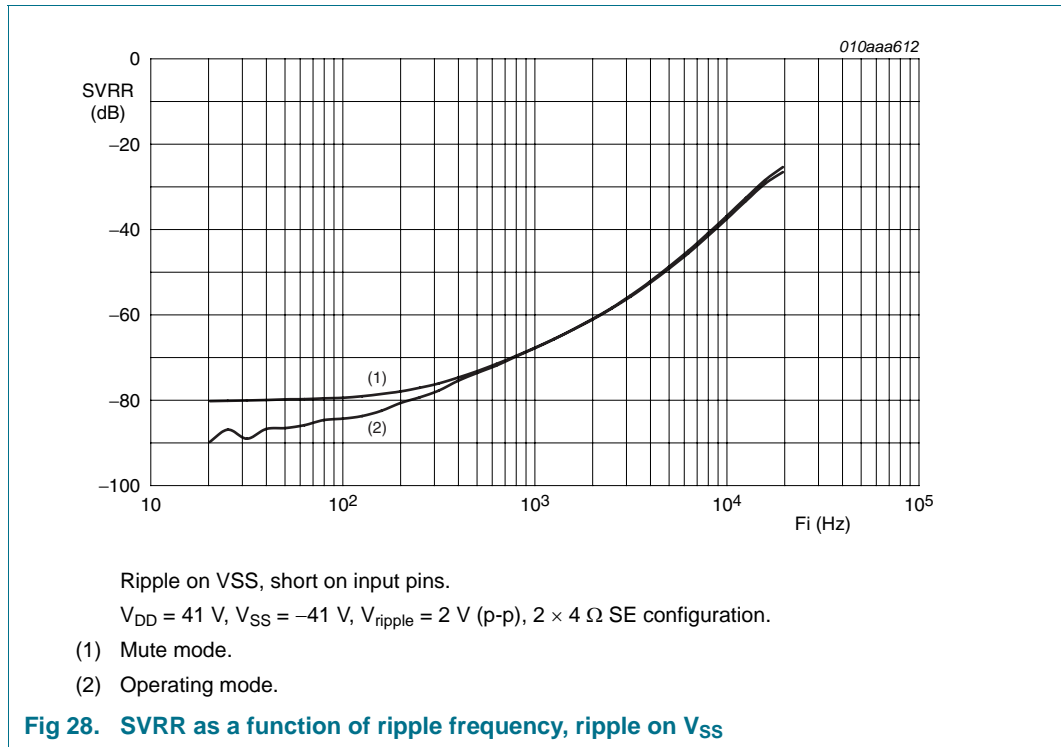

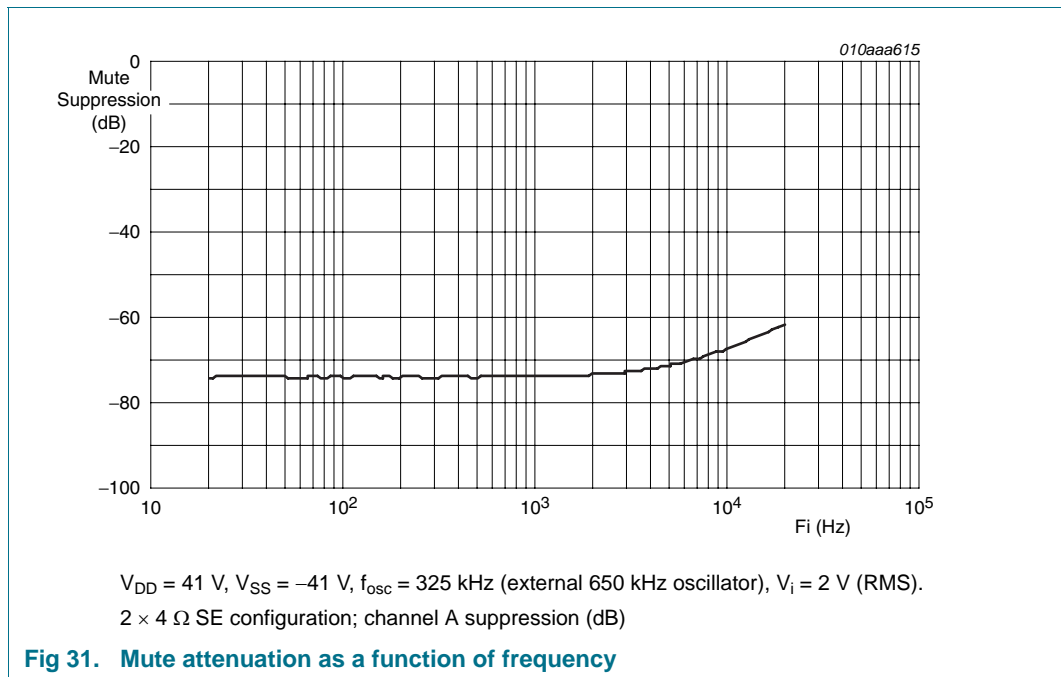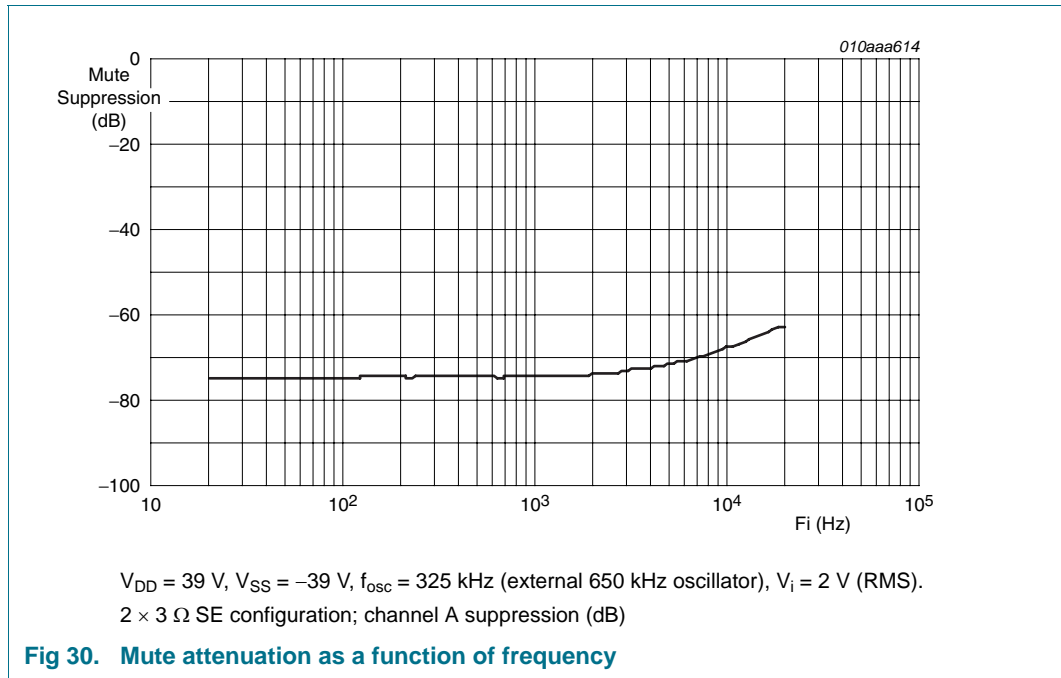

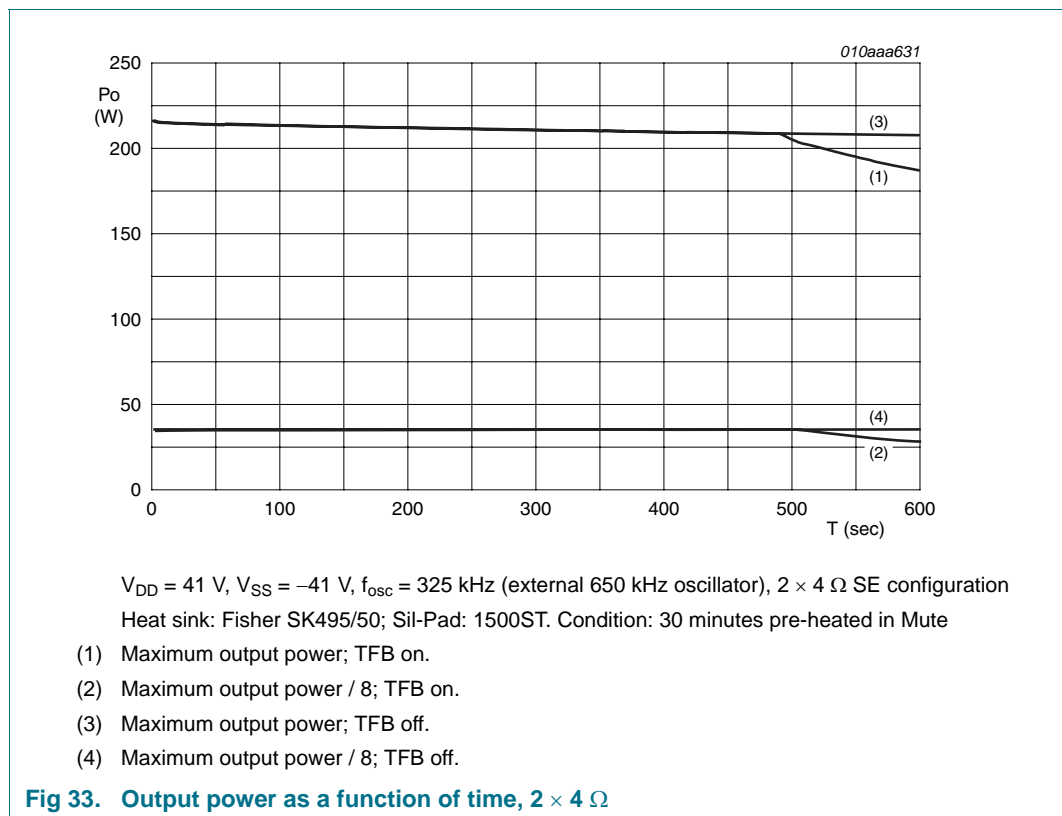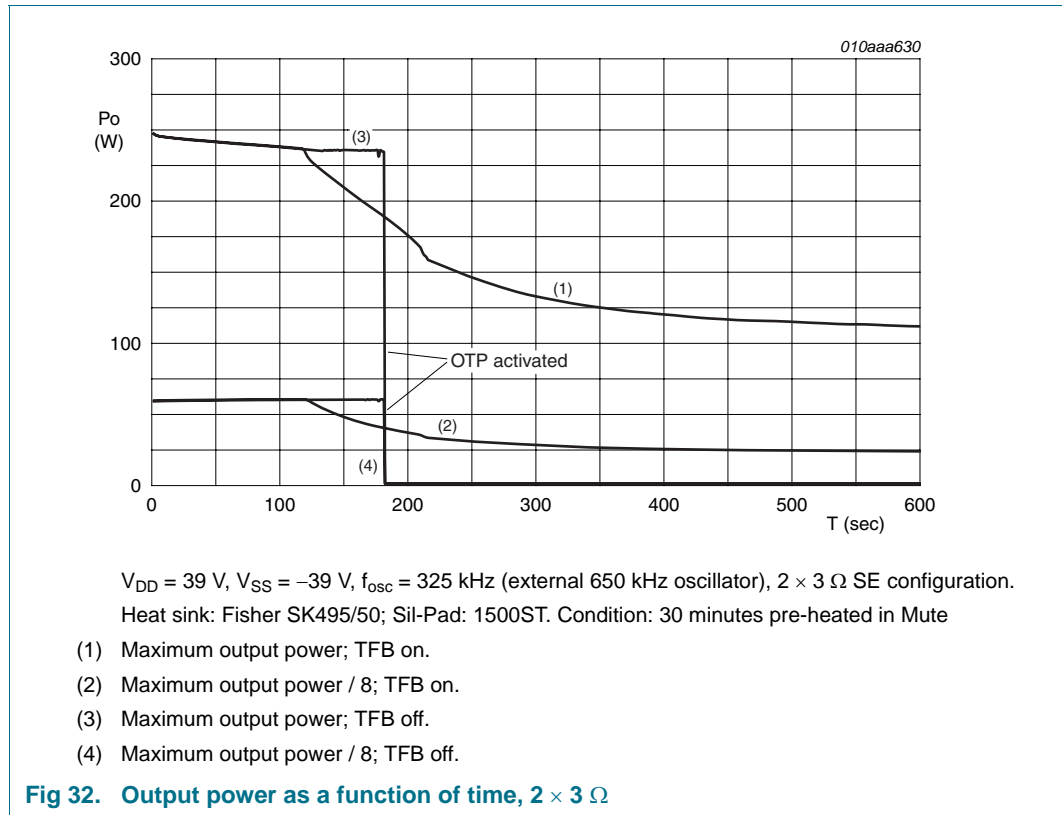

### 15. Package outline

DBS23P: plastic DIL-bent-SIL power package; 23 leads (straight lead length 3.2 mm)

SOT411-1

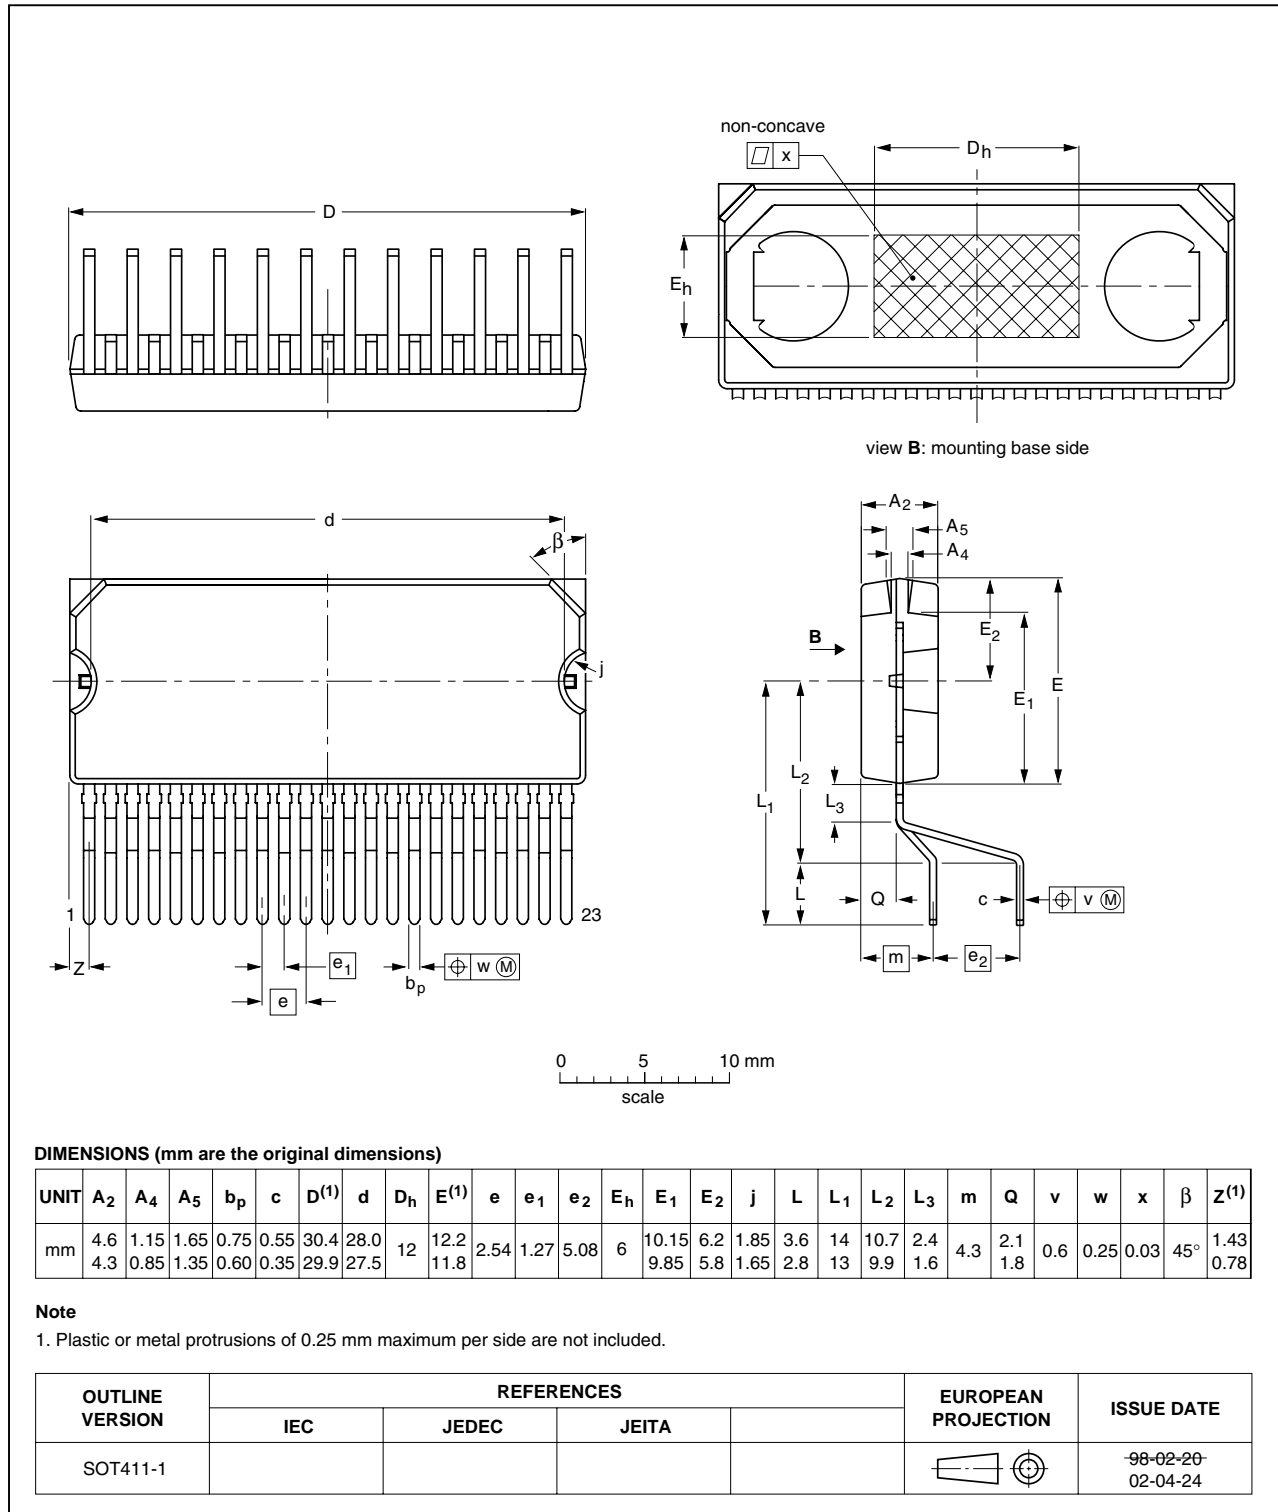


Fig 34. Package outline SOT411-1 (DBS23P)

HSOP24: plastic, heatsink small outline package; 24 leads; low stand-off height

SOT566-3

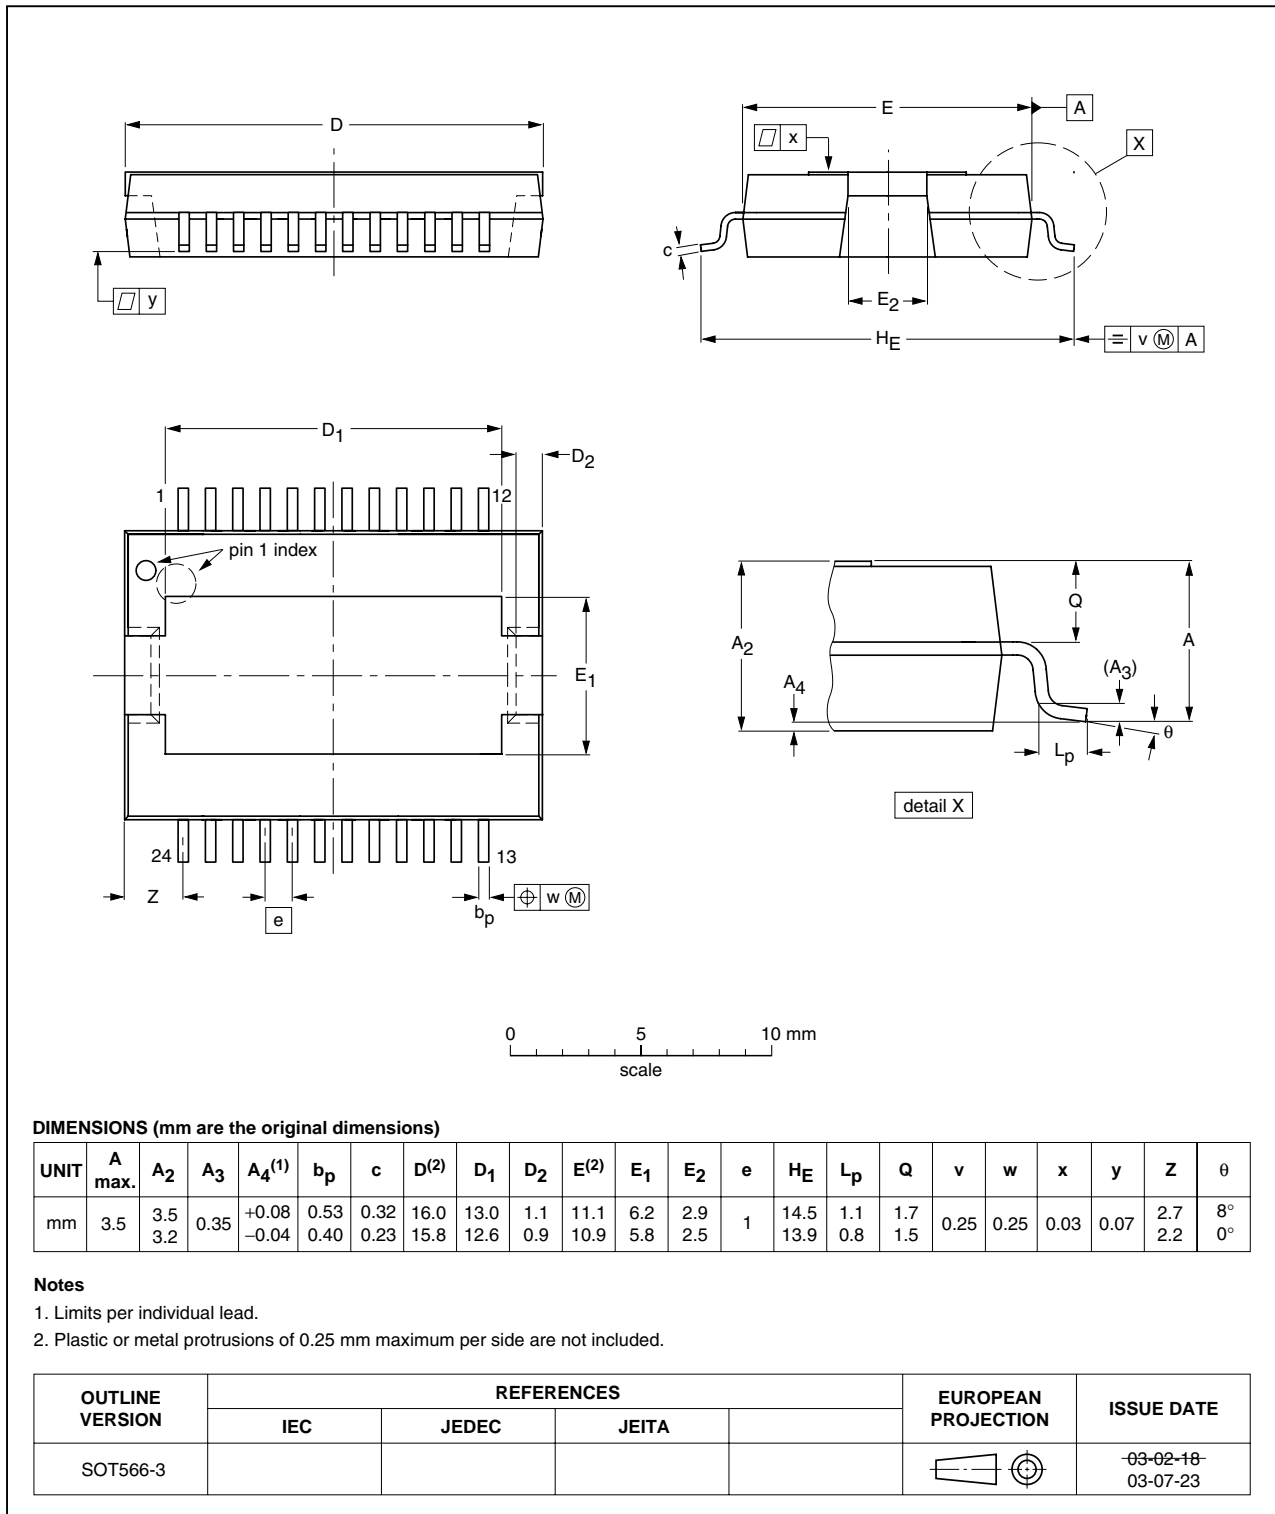


Fig 35. Package outline SOT566-3 (HSOP24)

## 16. Soldering of SMD packages

This text provides a very brief insight into a complex technology. A more in-depth account of soldering ICs can be found in Application Note *AN10365 “Surface mount reflow soldering description”*.

### 16.1 Introduction to soldering

Soldering is one of the most common methods through which packages are attached to Printed Circuit Boards (PCBs), to form electrical circuits. The soldered joint provides both the mechanical and the electrical connection. There is no single soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and Surface Mount Devices (SMDs) are mixed on one printed wiring board; however, it is not suitable for fine pitch SMDs. Reflow soldering is ideal for the small pitches and high densities that come with increased miniaturization.

### 16.2 Wave and reflow soldering

Wave soldering is a joining technology in which the joints are made by solder coming from a standing wave of liquid solder. The wave soldering process is suitable for the following:

- Through-hole components
- Leaded or leadless SMDs, which are glued to the surface of the printed circuit board

Not all SMDs can be wave soldered. Packages with solder balls, and some leadless packages which have solder lands underneath the body, cannot be wave soldered. Also, leaded SMDs with leads having a pitch smaller than ~0.6 mm cannot be wave soldered, due to an increased probability of bridging.

The reflow soldering process involves applying solder paste to a board, followed by component placement and exposure to a temperature profile. Leaded packages, packages with solder balls, and leadless packages are all reflow solderable.

Key characteristics in both wave and reflow soldering are:

- Board specifications, including the board finish, solder masks and vias
- Package footprints, including solder thieves and orientation
- The moisture sensitivity level of the packages
- Package placement
- Inspection and repair
- Lead-free soldering versus SnPb soldering

### 16.3 Wave soldering

Key characteristics in wave soldering are:

- Process issues, such as application of adhesive and flux, clinching of leads, board transport, the solder wave parameters, and the time during which components are exposed to the wave
- Solder bath specifications, including temperature and impurities



## 16.4 Reflow soldering

Key characteristics in reflow soldering are:

- Lead-free versus SnPb soldering; note that a lead-free reflow process usually leads to higher minimum peak temperatures (see [Figure 36](#)) than a SnPb process, thus reducing the process window
- Solder paste printing issues including smearing, release, and adjusting the process window for a mix of large and small components on one board
- Reflow temperature profile; this profile includes preheat, reflow (in which the board is heated to the peak temperature) and cooling down. It is imperative that the peak temperature is high enough for the solder to make reliable solder joints (a solder paste characteristic). In addition, the peak temperature must be low enough that the packages and/or boards are not damaged. The peak temperature of the package depends on package thickness and volume and is classified in accordance with [Table 13](#) and [14](#)

**Table 13. SnPb eutectic process (from J-STD-020C)**


| Package thickness (mm) | Package reflow temperature (°C) |       |
|------------------------|---------------------------------|-------|
|                        | Volume (mm <sup>3</sup> )       |       |
|                        | < 350                           | ≥ 350 |
| < 2.5                  | 235                             | 220   |
| ≥ 2.5                  | 220                             | 220   |

**Table 14. Lead-free process (from J-STD-020C)**

| Package thickness (mm) | Package reflow temperature (°C) |             |        |
|------------------------|---------------------------------|-------------|--------|
|                        | Volume (mm <sup>3</sup> )       |             |        |
|                        | < 350                           | 350 to 2000 | > 2000 |
| < 1.6                  | 260                             | 260         | 260    |
| 1.6 to 2.5             | 260                             | 250         | 245    |
| > 2.5                  | 250                             | 245         | 245    |

Moisture sensitivity precautions, as indicated on the packing, must be respected at all times.

Studies have shown that small packages reach higher temperatures during reflow soldering, see [Figure 36](#).

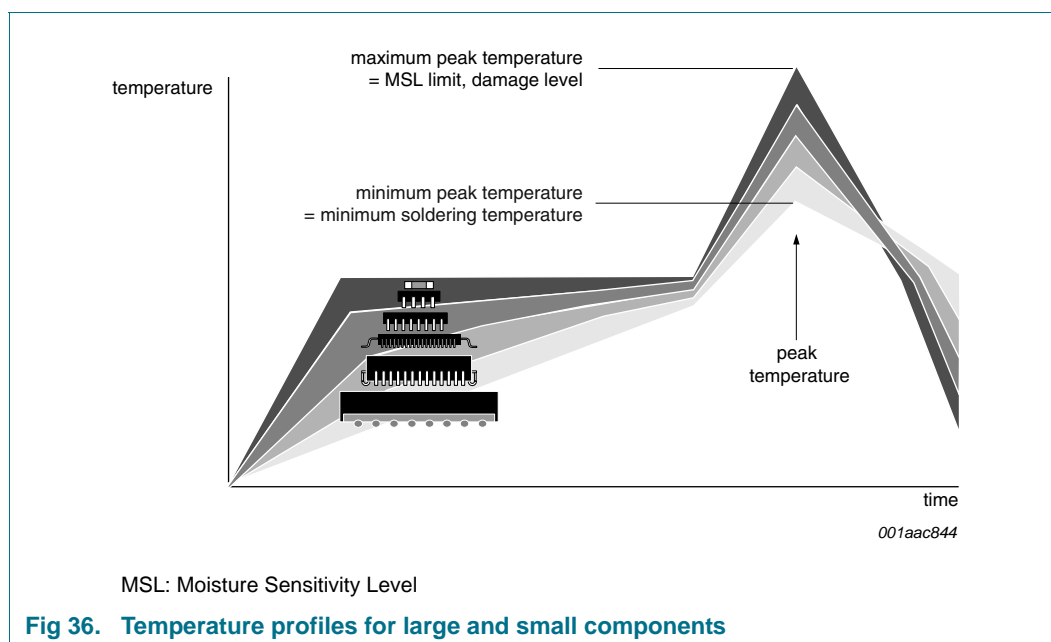

**Fig 36. Temperature profiles for large and small components**

For further information on temperature profiles, refer to Application Note *AN10365* “Surface mount reflow soldering description”.

## 17. Soldering of through-hole mount packages

### 17.1 Introduction to soldering through-hole mount packages

This text gives a very brief insight into wave, dip and manual soldering.

Wave soldering is the preferred method for mounting of through-hole mount IC packages on a printed-circuit board.

### 17.2 Soldering by dipping or by solder wave

Driven by legislation and environmental forces the worldwide use of lead-free solder pastes is increasing. Typical dwell time of the leads in the wave ranges from 3 seconds to 4 seconds at 250 °C or 265 °C, depending on solder material applied, SnPb or Pb-free respectively.

The total contact time of successive solder waves must not exceed 5 seconds.

The device may be mounted up to the seating plane, but the temperature of the plastic body must not exceed the specified maximum storage temperature ( $T_{stg(max)}$ ). If the printed-circuit board has been pre-heated, forced cooling may be necessary immediately after soldering to keep the temperature within the permissible limit.

### 17.3 Manual soldering

Apply the soldering iron (24 V or less) to the lead(s) of the package, either below the seating plane or not more than 2 mm above it. If the temperature of the soldering iron bit is less than 300 °C it may remain in contact for up to 10 seconds. If the bit temperature is between 300 °C and 400 °C, contact may be up to 5 seconds.

## 17.4 Package related soldering information

Table 15. Suitability of through-hole mount IC packages for dipping and wave soldering

| Package                         | Soldering method |                         |
|---------------------------------|------------------|-------------------------|
|                                 | Dipping          | Wave                    |
| CPGA, HCPGA                     | -                | suitable                |
| DBS, DIP, HDIP, RDBS, SDIP, SIL | suitable         | suitable <sup>[1]</sup> |
| PMFP <sup>[2]</sup>             | -                | not suitable            |

[1] For SDIP packages, the longitudinal axis must be parallel to the transport direction of the printed-circuit board.

[2] For PMFP packages hot bar soldering or manual soldering is suitable.

## 18. Revision history

Table 16. Revision history

| Document ID | Release date | Data sheet status  | Change notice | Supersedes |
|-------------|--------------|--------------------|---------------|------------|
| TDA8954_1   | 20091224     | Product data sheet | -             | -          |

## 19. Legal information

### 19.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 19.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 19.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental

damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Terms and conditions of sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

### 19.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 20. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 21. Contents

|           |   |           |           |   |           |
|-----------|---|-----------|-----------|---|-----------|
| <b>1</b>  | <b>General description</b> . . . . .                                | <b>1</b>  | 16.1      | Introduction to soldering                             | 40        |
| <b>2</b>  | <b>Features</b> . . . . .   | <b>1</b>  | 16.2      | Wave and reflow soldering                             | 40        |
| <b>3</b>  | <b>Applications</b> . . . . .                                       | <b>2</b>  | 16.3      | Wave soldering  | 40        |
| <b>4</b>  | <b>Quick reference data</b> . . . . .                               | <b>2</b>  | 16.4      | Reflow soldering                                      | 41        |
| <b>5</b>  | <b>Ordering information</b> . . . . .                               | <b>2</b>  | <b>17</b> | <b>Soldering of through-hole mount packages</b>       | <b>42</b> |
| <b>6</b>  | <b>Block diagram</b> . . . . .                                      | <b>3</b>  | 17.1      | Introduction to soldering through-hole mount packages | 42        |
| <b>7</b>  | <b>Pinning information</b> . . . . .                                | <b>4</b>  | 17.2      | Soldering by dipping or by solder wave                | 42        |
| 7.1       | Pinning . . . . .   | 4         | 17.3      | Manual soldering                                      | 42        |
| 7.2       | Pin description . . . . .   | 5         | 17.4      | Package related soldering information                 | 43        |
| <b>8</b>  | <b>Functional description</b> . . . . .                             | <b>5</b>  | <b>18</b> | <b>Revision history</b> . . . . .                     | <b>44</b> |
| 8.1       | General . . . . .   | 5         | <b>19</b> | <b>Legal information</b> . . . . .                    | <b>45</b> |
| 8.2       | Diagnostics . . . . .   | 8         | 19.1      | Data sheet status . . . . .                           | 45        |
| 8.3       | Pulse-width modulation frequency . . . . .                          | 8         | 19.2      | Definitions . . . . .                                 | 45        |
| 8.4       | Protection . . . . .  | 9         | 19.3      | Disclaimers . . . . .                                 | 45        |
| 8.4.1     | Thermal protection . . . . .  | 9         | 19.4      | Trademarks . . . . .                                  | 45        |
| 8.4.1.1   | Thermal FoldBack (TFB) . . . . .                                    | 9         | <b>20</b> | <b>Contact information</b> . . . . .                  | <b>45</b> |
| 8.4.1.2   | OverTemperature Protection (OTP) . . . . .                          | 10        | <b>21</b> | <b>Contents</b> . . . . .                             | <b>46</b> |
| 8.4.2     | OverCurrent Protection (OCP) . . . . .                              | 11        |           |   |           |
| 8.4.3     | Window Protection (WP) . . . . .                                    | 13        |           |   |           |
| 8.4.4     | Supply voltage protection . . . . .                                 | 13        |           |   |           |
| 8.4.5     | Clock protection (CP) . . . . .                                     | 14        |           |   |           |
| 8.4.6     | Overview of protection functions . . . . .                          | 14        |           |   |           |
| 8.5       | Differential audio inputs . . . . .                                 | 14        |           |   |           |
| <b>9</b>  | <b>Internal circuitry</b> . . . . .                                 | <b>16</b> |           |   |           |
| <b>10</b> | <b>Limiting values</b> . . . . .                                    | <b>18</b> |           |   |           |
| <b>11</b> | <b>Thermal characteristics</b> . . . . .                            | <b>18</b> |           |   |           |
| <b>12</b> | <b>Static characteristics</b> . . . . .                             | <b>18</b> |           |   |           |
| <b>13</b> | <b>Dynamic characteristics</b> . . . . .                            | <b>20</b> |           |   |           |
| 13.1      | Switching characteristics . . . . .                                 | 20        |           |   |           |
| 13.2      | Stereo SE configuration characteristics . . . . .                   | 21        |           |   |           |
| 13.3      | Mono BTL application characteristics . . . . .                      | 22        |           |   |           |
| <b>14</b> | <b>Application information</b> . . . . .                            | <b>23</b> |           |   |           |
| 14.1      | Mono BTL application . . . . .                                      | 23        |           |   |           |
| 14.2      | Pin MODE . . . . .  | 23        |           |   |           |
| 14.3      | Estimating the output power . . . . .                               | 23        |           |   |           |
| 14.3.1    | Single-Ended (SE) . . . . .   | 23        |           |   |           |
| 14.3.2    | Bridge-Tied Load (BTL) . . . . .                                    | 24        |           |   |           |
| 14.4      | External clock . . . . .  | 24        |           |   |           |
| 14.5      | Heatsink requirements . . . . .                                     | 24        |           |   |           |
| 14.6      | Pumping effects . . . . .   | 26        |           |   |           |
| 14.7      | Application schematic . . . . .                                     | 26        |           |   |           |
| 14.8      | Curves measured in reference design (demo board TDA8954J) . . . . . | 28        |           |   |           |
| <b>15</b> | <b>Package outline</b> . . . . .                                    | <b>38</b> |           |   |           |
| <b>16</b> | <b>Soldering of SMD packages</b> . . . . .                          | <b>40</b> |           |   |           |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

founded by

**PHILIPS**

© NXP B.V. 2009.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 24 December 2009

Document identifier: TDA8954\_1

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.