
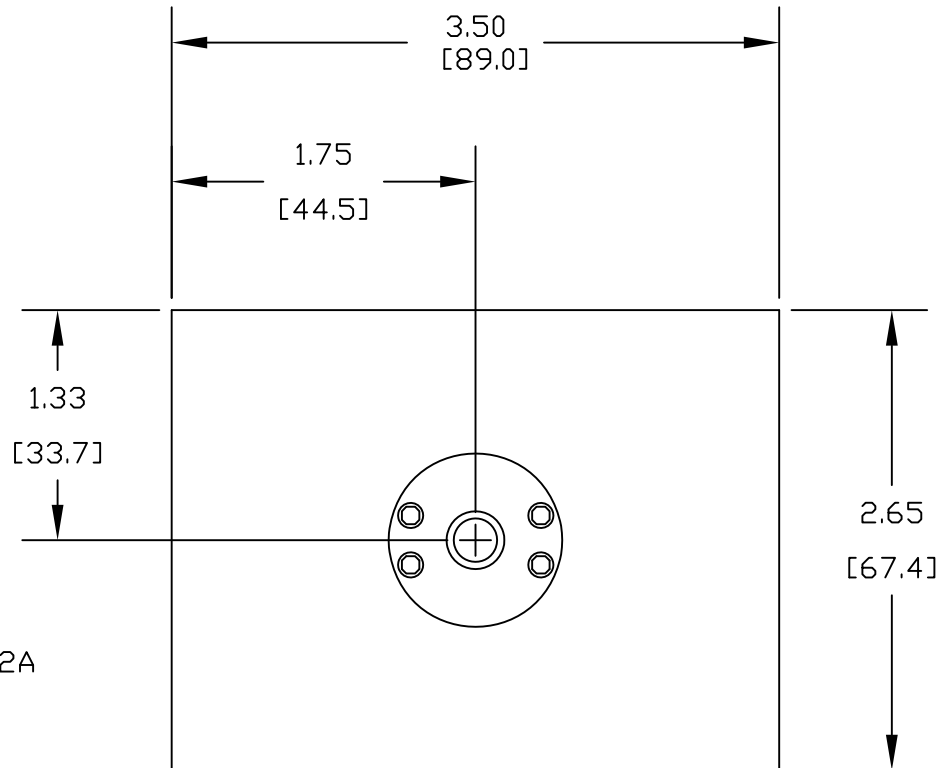


**MATERIALS**

<b>CONNECTOR</b>	<b>PASSIVATED STAINLESS STEEL</b>
<b>CONTACT</b>	<b>GOLD PLATED</b>
<b>INSULATOR</b>	<b>PTFE</b>
<b>HEAT SINK</b>	<b>ANODIZED ALUMINUM</b>

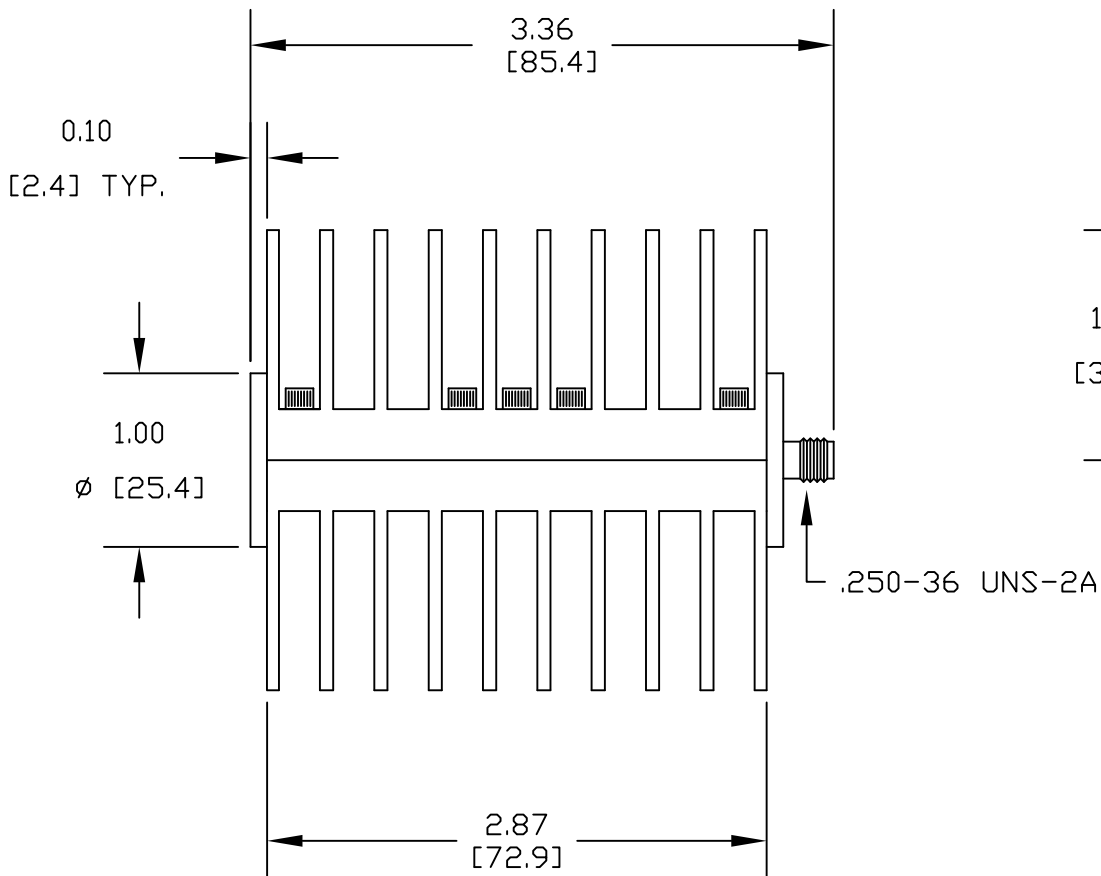

**SPECIFICATIONS**

FREQUENCY RANGE: DC TO 18 GHz  
 POWER HANDLING CAPABILITY: 50 WATTS  
 MAXIMUM VSWR: 1.45



**PASTERNACK ENTERPRISES, INC.**  
 P.O BOX 16759, IRVINE, CA 92623  
 PHONE (949) 261-1920 FAX (949) 261-7451  
 WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
 E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
**COAXIAL & FIBER OPTICS**

DWG TITLE

**PE6040**

DES.

SMA FEMALE HIGH POWER TERMINATION  
 FREQUENCY RANGE: DC TO 18 GHz

REV. A

FSCM NO. 53919

CAD FILE 031411

SCALE N/A

SIZE A

127

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).