



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/20/07	~~~~	LJC 04/20/07
B	整理图面	YCH 05/14/07	~~~~	LJC 05/14/07
C	整理图面	YCH 10/17/07	~~~~	LJC 05/14/07
II	ADD P/N CODE	JL7 06/25/15'	~~~~	

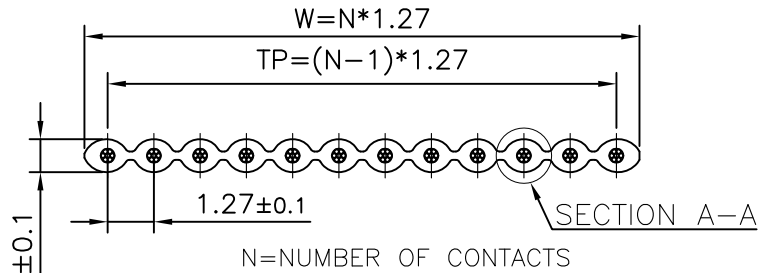


NOTES:

- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

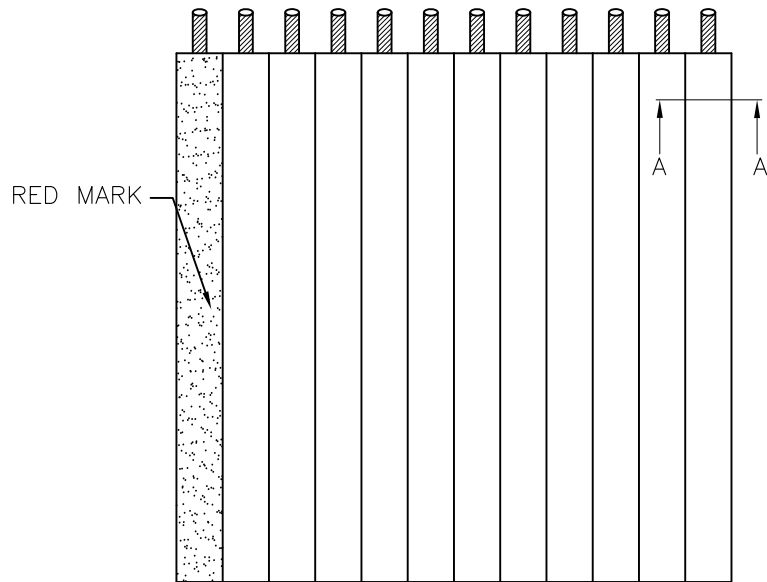

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
10	11.43	12.70	±0.30	∅0.100<0.397
14	16.51	17.78	±0.30	
16	19.05	20.32	±0.30	
20	24.13	25.40	±0.30	
24	29.21	30.48	±0.30	
26	31.75	33.02	±0.30	
30	36.83	38.10	±0.30	∅0.127<0.237
34	41.91	43.18	±0.40	
40	49.53	50.80	±0.40	
50	62.23	63.50	±0.40	
60	74.93	76.20	±0.40	
64	80.01	81.28	±0.40	

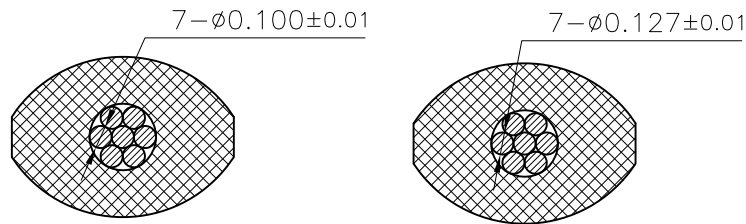

SECTION A-A (4:1)

SECTION A-A (4:1)