
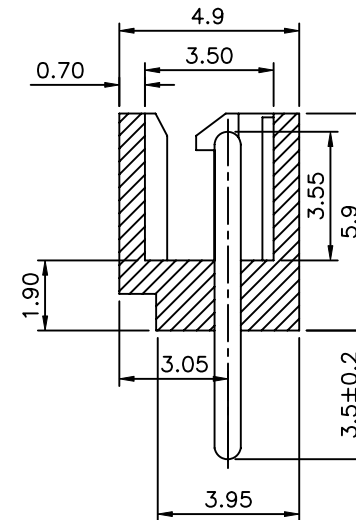
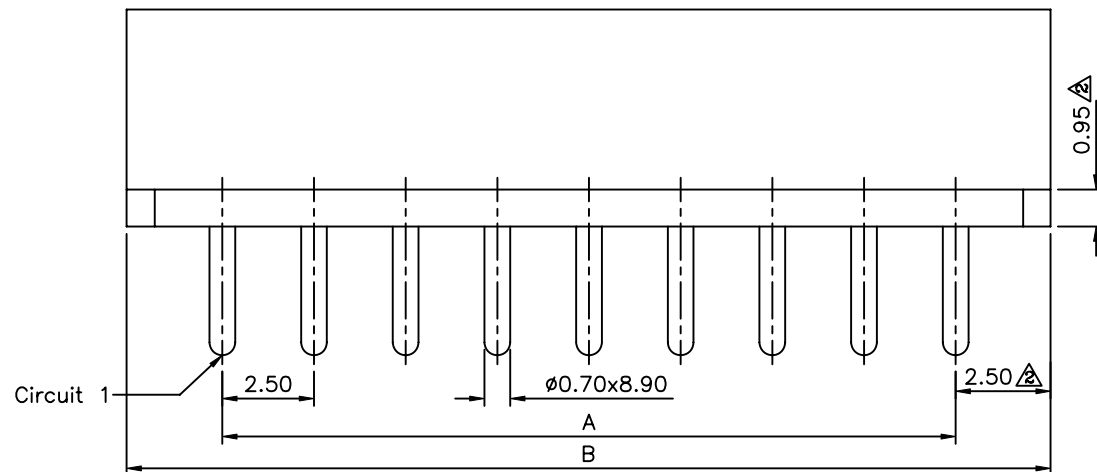


Recommended P.C.B. Layout

SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact:Brass,Tin Plated
⚠ Base:PA66(UL94V-2),Natural
RoHS Compliant

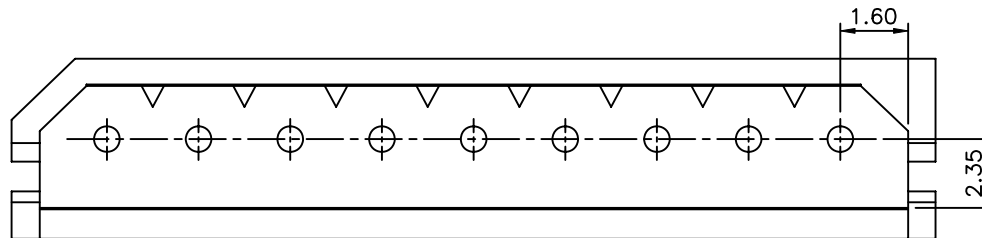

Pin	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50

DRAWING No.

01677

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

SCALE


NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.50
.XX ±0.25
.XXX ±0.10
ANG. ±2°

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A2

Modify Data

HZF

11/22/2010

A1

Add P/N Code & Color

HZF

11/11/2010

A0

NEW RELEASE

HZF

11/07/2009