

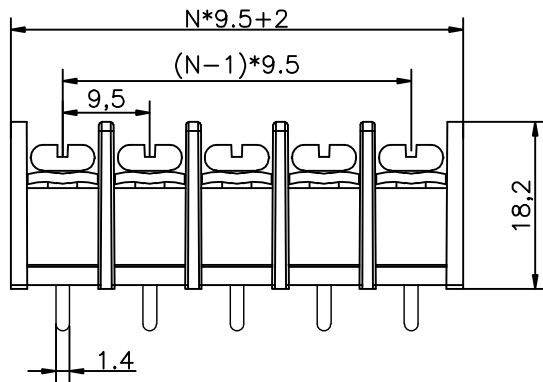


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

- 材质及电镀(Material)
 塑件(Housing): PA66, UL94V-0
 端子(Terminal): 黄铜, 0.8t 镀锡(Brass, Tin plated)
 螺丝(Screw): M4, 钢, 镀锌(Steel, Ni-Plated)
- 电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 25A
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V
 耐电压(Withstanding Voltage): AC2000V/Min
- 机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~ +105℃
 适用线径(Wire Range): 22-14AWG
 最大扭矩值(Max.Torque Value): 0.5N.m 4.4Lb.in

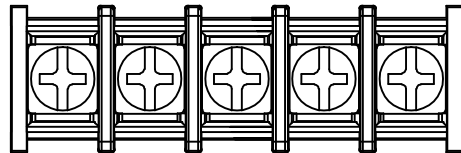

订购方式/HOW TO ORDER

P

型号 Series NO. 极数 NO.of Pole 间距 Pitch 颜色 Color

1	单间距	1	灰色
	Single Pitch	2	蓝色
2	双间距	3	黑色
	Double Pitch	4	绿色

客户需求 Customer Request

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表				宁波迈科思电子科技有限公司 NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
TOLERANCE UNLESS OTHERWISE				单位	制图	审核	产品名称		
X.	±0.25	X*	±5°	UNITS	mm	陈冬梅	MX45C-9.50		
.X	±0.20	.X*	±2°	角法		顾兴伟	MX45C-9.50		
.XX	±0.15	.XX*	±1°	VIEW	DESIGN		MX45C-9.50		
.XXX	±0.02	.XXX*	±0.5°	比例	1:1		MX45C-9.50		
日期	2012.07.10	版本	A0	DATE	YER	核准	图号	MX45C-9.50-0A	
						APPD	DRW NO.		