


RoHS Compliant


Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

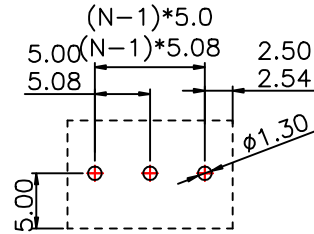

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)



SPECIFICATION

MATERIAL


Housing:PA66,UL94V-0
 Screw:M2.5 Steel ,Zinc Plated
 Terminal:Brass,Tin Plated
 Clamp:Brass,Ni Plated

ELECTRICAL


Rated voltage:300V
 Rated current: 15A
 Wire Range(AWG/MM²):26-14AWG/0.14-2.5MM²
 Withstanding voltage: AC2500V/ 1Min

MECHANICAL

Torque:0.4Nm(3.5Lb-In.)
 Strip Length:7mm
 Operating Temperature:-40°C~+105°C

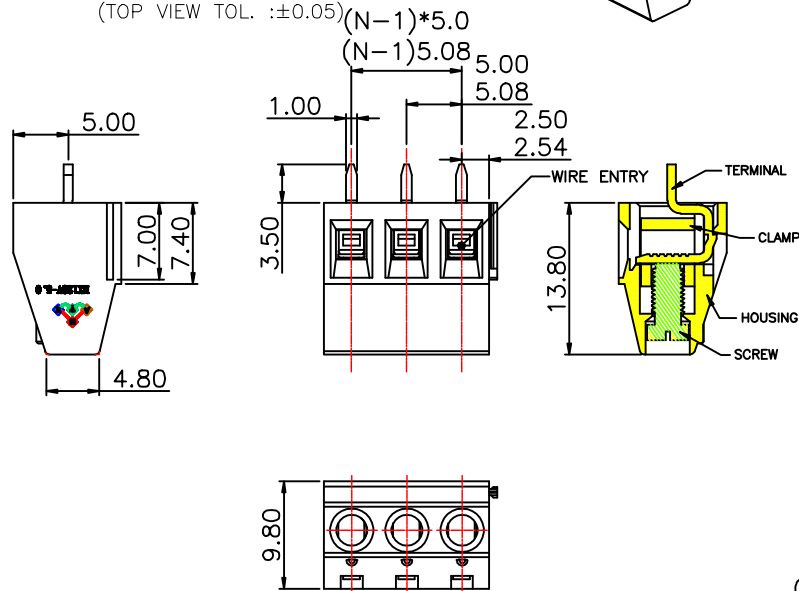

订购方式/HOW TO ORDER

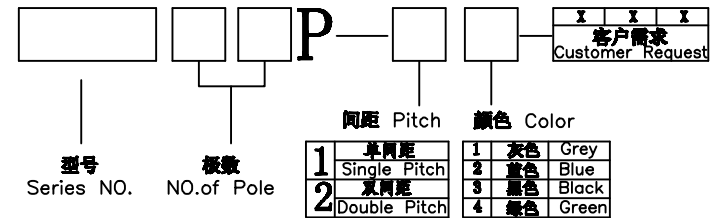

CONTACT WITH US:

TEL:+86-574-63505128 FAX:+86-574-63532183

E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE				 宁波迈科思电子科技有限公司 NINGBO MIK ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X*	±5*	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE	MX128V-5.0/5.08
.X	±0.20	.X*	±2*	角法 VIEW		设计 DESIGN	顾兴伟		
.XX	±0.15	.XX*	±1*	比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	MX128V-5.0/5.08
.XXX	±0.02	.XXX*	±0.5*	日期 DATE	2012. 07. 10	版本 VER	A0	图号 DRAW NO.	MX128V-5.0-A0