RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

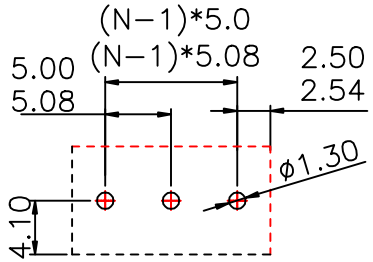

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)



SPECIFICATION

MATERIAL

- Housing:PA66,UL94V-0
- Screw:M2.5 Steel ,Zinc Plated
- Terminal:Brass,Tin Plated
- Clamp:Brass,Ni Plated

ELECTRICAL

- Rated voltage:300V
- Rated current: 12A
- Wire Range(AWG/MM²):26-16AWG/0.14-1.5MM²
- Withstanding voltage: AC2000V/ 1Min

MECHANICAL

- Torque:0.4Nm(3.5Lb-In.)
- Strip Length:6mm
- Operating Temperature:-40℃~+105℃



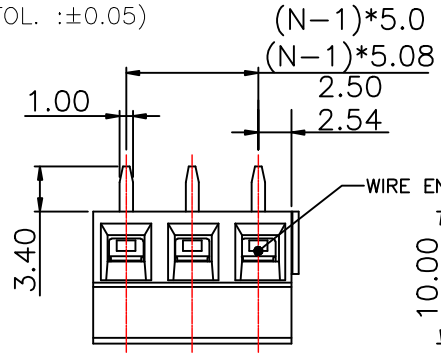



订购方式/HOW TO ORDER

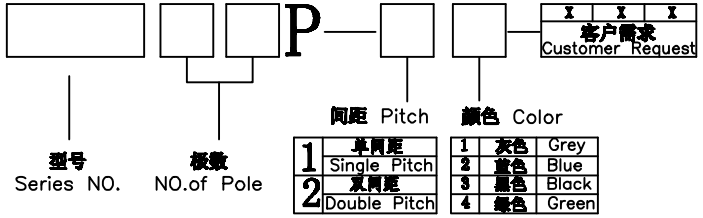



N=No.of contacts

CONTACT WITH US:

TEL:+86-574-63505128 FAX:+86-574-63532183

E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

公差一览表 TOLERANCE UNLESS OTHERWISE				宁波迈科思电子科技有限公司 NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE	MX127-5.0/5.08
.X	±0.20	.X°	±2°	角法 VIEW		设计 DESIGN	顾兴伟		
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	MX127-5.0/5.08
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 VER	A0	核准 APPD		图号 DRAW NO.	MX127-5.0-0A