RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

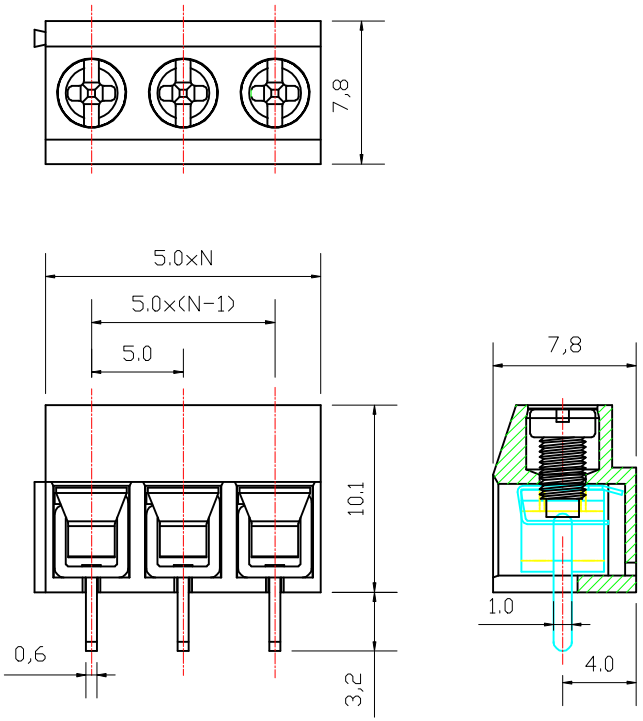

N=No.of contacts

·材质及电镀(Material)
螺丝(Screw):M2.5,钢,镀锌(steel, zinc Plated)
弹片(WireProtector):磷青铜,镀镍或不锈钢
(Phosphor bronze, Ni plated or stainless steel)
焊针(Pin header):黄铜,镀锡(Brass,Tin plated)
塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)
额定电压(Rated Voltage): 300V
额定电流(Rated Current): 10A
接触电阻(Contact Resistance): 20mΩ
绝缘电阻(Insulation Resistance): 5000MΩ/1000V
耐电压(Withstanding Voltage): AC1500V/1Min
使用线径(Wire Range): 26-14AWG 2.5mm²

·机械性能(Mechanical)
温度范围(Temperature Range): -40℃～ +105℃
瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)
扭矩(Torque): 0.3Nm(2.7lb.in)
剥线长度(Strip length): 6-7mm

订购方式/HOW TO ORDER

[ ] [ ][ ] P — [ ] [ ] — [X][X][X] 客户需求 Customer Request

型号 Series NO.

极数 NO.of Pole

间距 Pitch

1	单间距 Single Pitch
2	双间距 Double Pitch

颜色 Color

1	灰色	Grey
2	蓝色	Blue
3	黑色	Black
4	绿色	Green
5	橙色	Orange
6	红色	Red
7	透明	Transparent
8	黄色	Yellow
9	白色	White

CONTACT WITH US:
TEL:+86-574-63505128 FAX:+86-574-63532183
E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 DATE	2012.07.10		

宁波迈科思电子科技有限公司
NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD

单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE	MX126V-5.0
角法 VIEW		设计 DESIGN	顾兴伟		
比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	MX126V-5.0
版本 VER	A0	核准 APPD		图号 DRAW NO.	MX126V-5.0-0A