

SHINDENGEN

HVX-2 Series Power MOSFET

N-Channel Enhancement type

2SK2674
(F7W90HVX2)

900V 7A


FEATURES

- Input capacitance (Ciss) is small. Especially, input capacitance at 0 bias is small.
- The static Rds(on) is small.
- The switching time is fast.
- Avalanche resistance guaranteed.

APPLICATION

- Switching power supply of AC 240V input
- High voltage power supply
- Inverter

OUTLINE DIMENSIONS

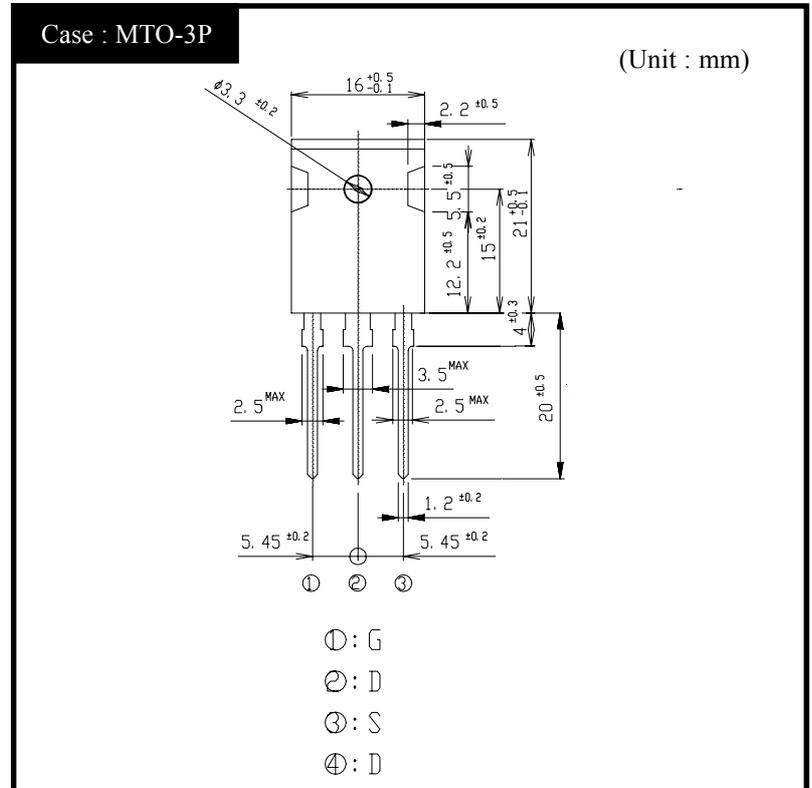

RATINGS

● Absolute Maximum Ratings (Tc = 25°C)


| Item | Symbol | Conditions | Ratings | Unit |
|---------------------------------|------------------|---|---------|------|
| Storage Temperature | T _{stg} | | -55~150 | °C |
| Channel Temperature | T _{ch} | | 150 | |
| Drain-Source Voltage | V _{DSS} | | 900 | V |
| Gate-Source Voltage | V _{GSS} | | ±30 | |
| Continuous Drain Current (DC) | I _D | | 7 | A |
| Continuous Drain Current (Peak) | I _{DP} | Pulse width ≤ 10 μs, Duty cycle ≤ 1/100 | 14 | |
| Continuous Source Current (DC) | I _S | | 7 | |
| Total Power Dissipation | P _T | | 100 | W |
| Repetitive Avalanche Current | I _{AR} | T _{ch} = 150°C | 7 | A |
| Single Avalanche Energy | E _{AS} | T _{ch} = 25°C | 160 | mJ |
| Repetitive Avalanche Energy | E _{AR} | T _{ch} = 25°C | 16 | |
| Mounting Torque | TOR | (Recommended torque : 0.5 N·m) | 0.8 | N·m |

● Electrical Characteristics $T_c = 25^\circ\text{C}$


| Item | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|---------------|--|------|------|-----------|---------------------------|
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | $I_D = 1\text{mA}, V_{GS} = 0\text{V}$ | 900 | | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = 900\text{V}, V_{GS} = 0\text{V}$ | | | 250 | μA |
| Gate-Source Leakage Current | I_{GSS} | $V_{GS} = \pm 30\text{V}, V_{DS} = 0\text{V}$ | | | ± 0.1 | |
| Forward Transconductance | g_{fs} | $I_D = 3.5\text{A}, V_{DS} = 10\text{V}$ | 3.6 | 6.0 | | S |
| Static Drain-Source On-state Resistance | $R_{DS(ON)}$ | $I_D = 3.5\text{A}, V_{GS} = 10\text{V}$ | | 1.5 | 2.0 | Ω |
| Gate Threshold Voltage | V_{TH} | $I_D = 1\text{mA}, V_{DS} = 10\text{V}$ | 2.5 | 3.0 | 3.5 | V |
| Source-Drain Diode Forward Voltage | V_{SD} | $I_S = 3.5\text{A}, V_{GS} = 0\text{V}$ | | | 1.5 | |
| Thermal Resistance | θ_{jc} | junction to case | | | 1.25 | $^\circ\text{C}/\text{W}$ |
| Total Gate Charge | Q_g | $V_{DD} = 400\text{V}, V_{GS} = 10\text{V}, I_D = 7\text{A}$ | | 63 | | nC |
| Input Capacitance | C_{iss} | | | 1450 | | |
| Reverse Transfer Capacitance | C_{rss} | $V_{DS} = 25\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$ | | 37 | | pF |
| Output Capacitance | C_{oss} | | | 150 | | |
| Turn-On Time | t_{on} | $I_D = 3.5\text{A}, R_L = 43\Omega, V_{GS} = 10\text{V}$ | | 95 | 170 | ns |
| Turn-Off Time | t_{off} | | | 330 | 560 | |

2SK2674


Transfer Characteristics

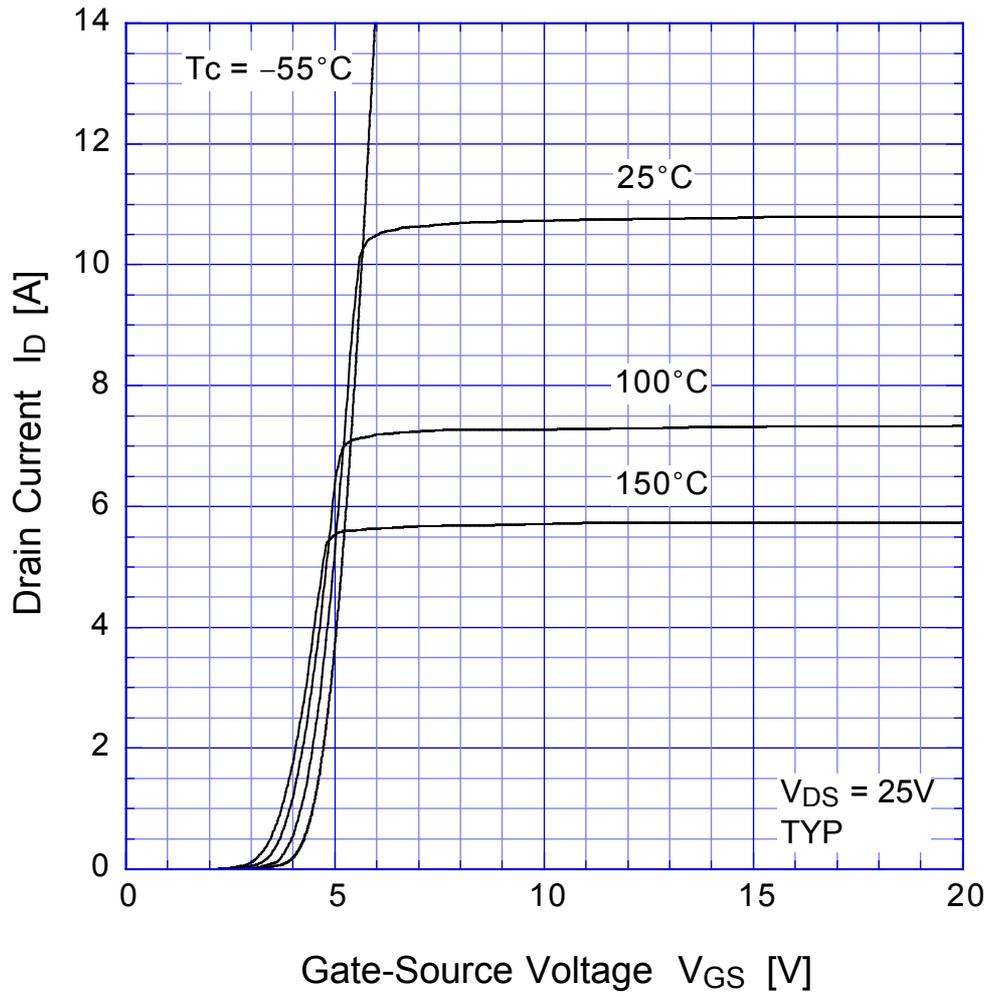


2SK2674 Static Drain-Source On-state Resistance

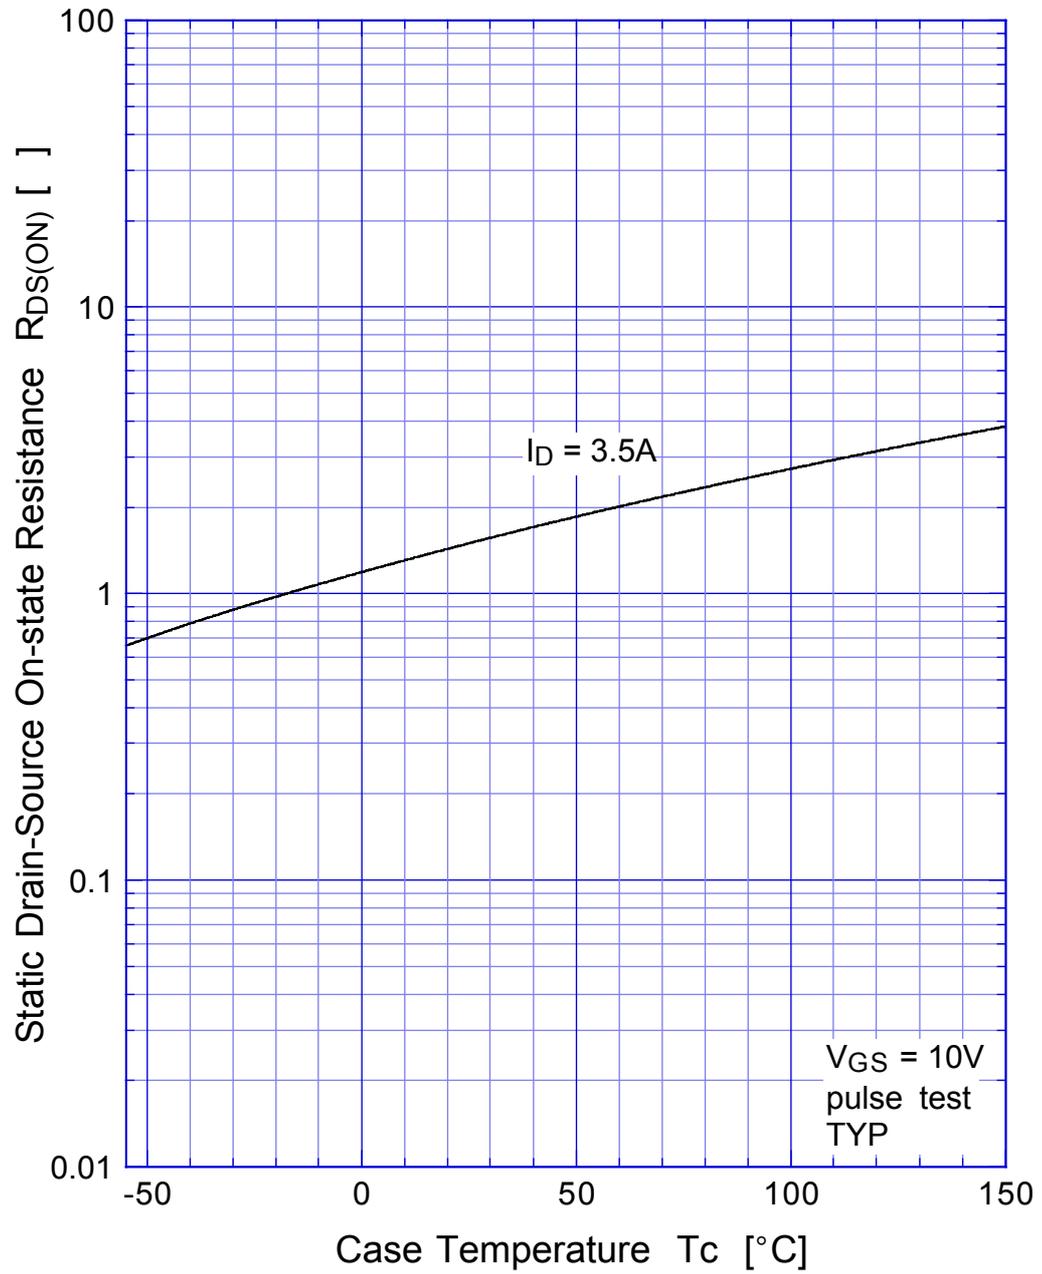


2SK2674 Gate Threshold Voltage

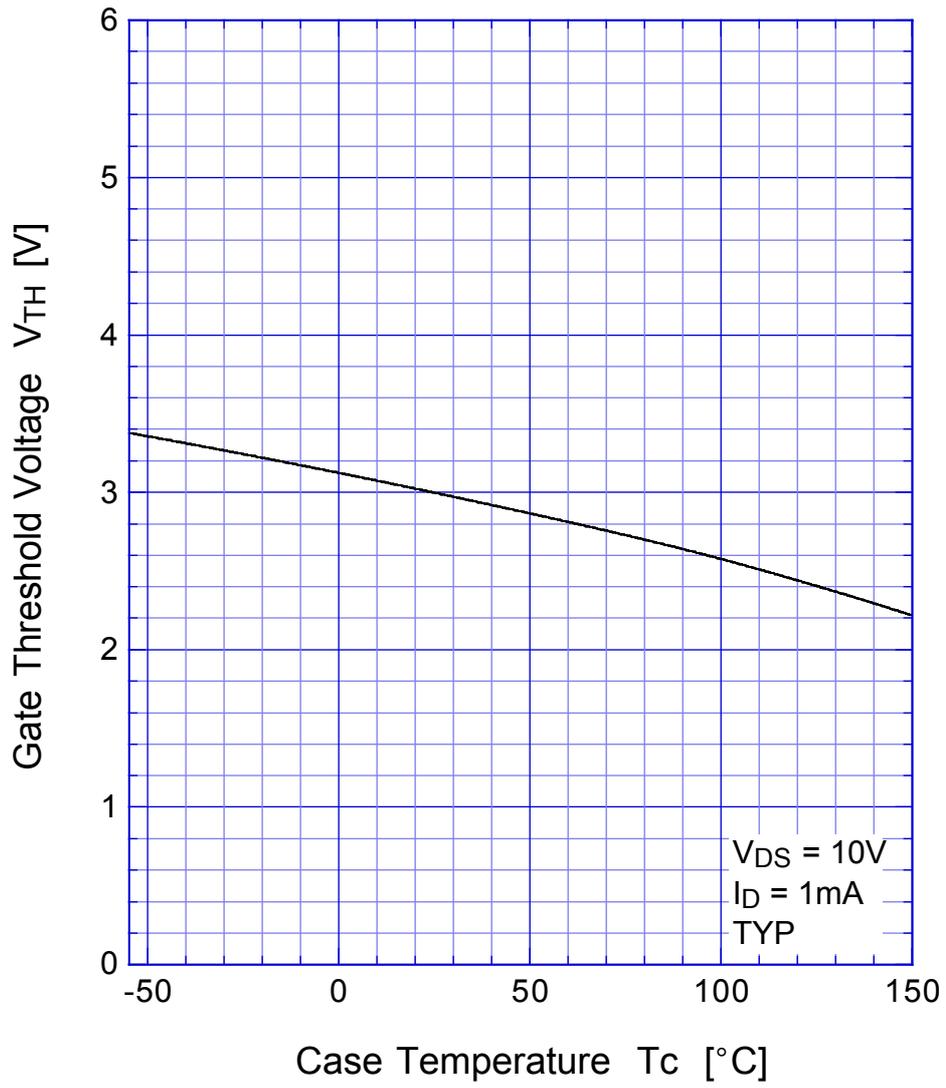


2SK2674 Safe Operating Area

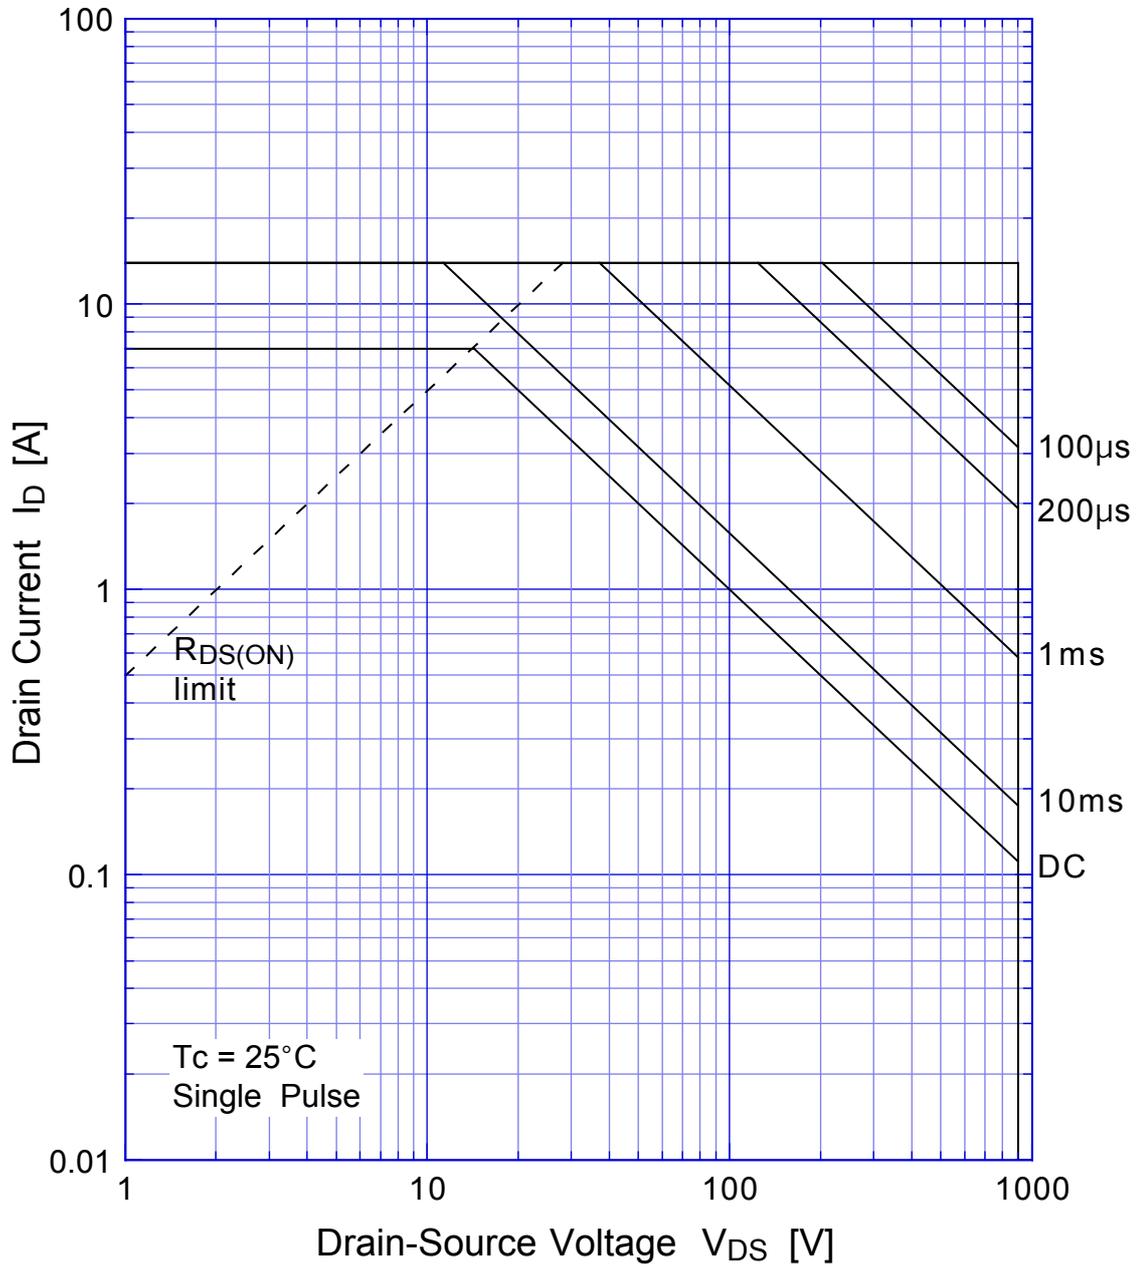


2SK2674 Transient Thermal Impedance

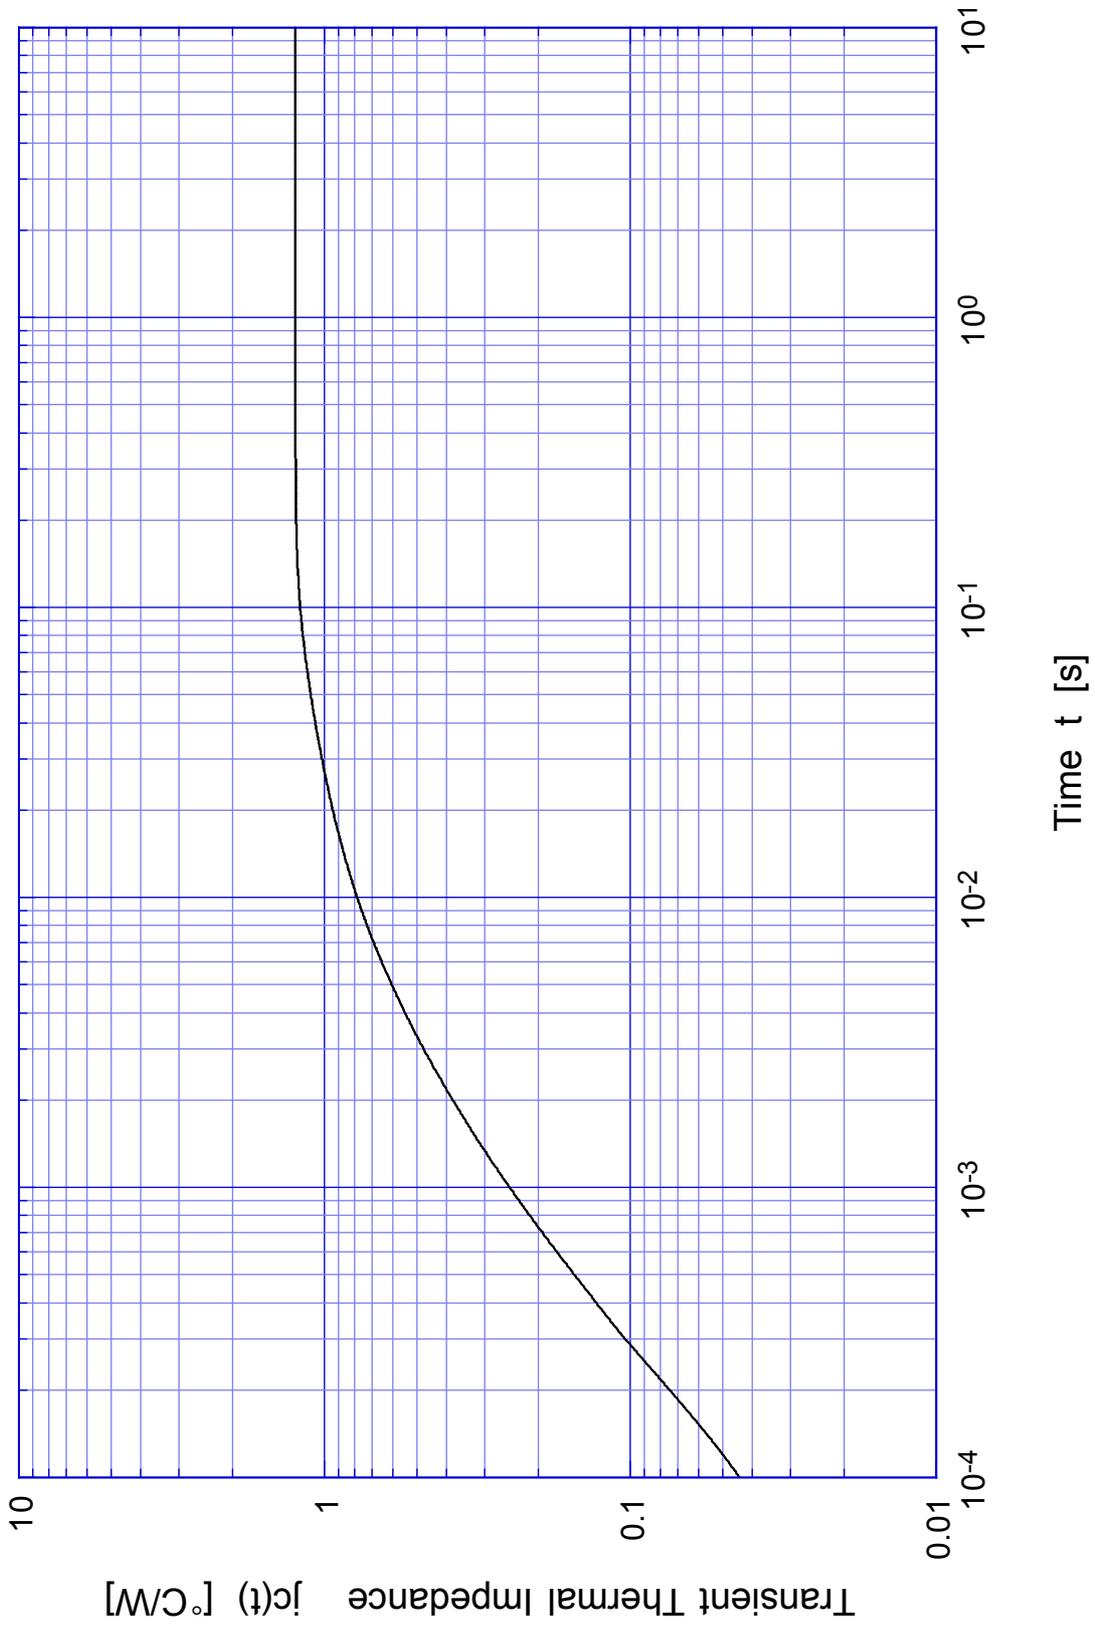


2SK2674 Single Avalanche Energy Derating

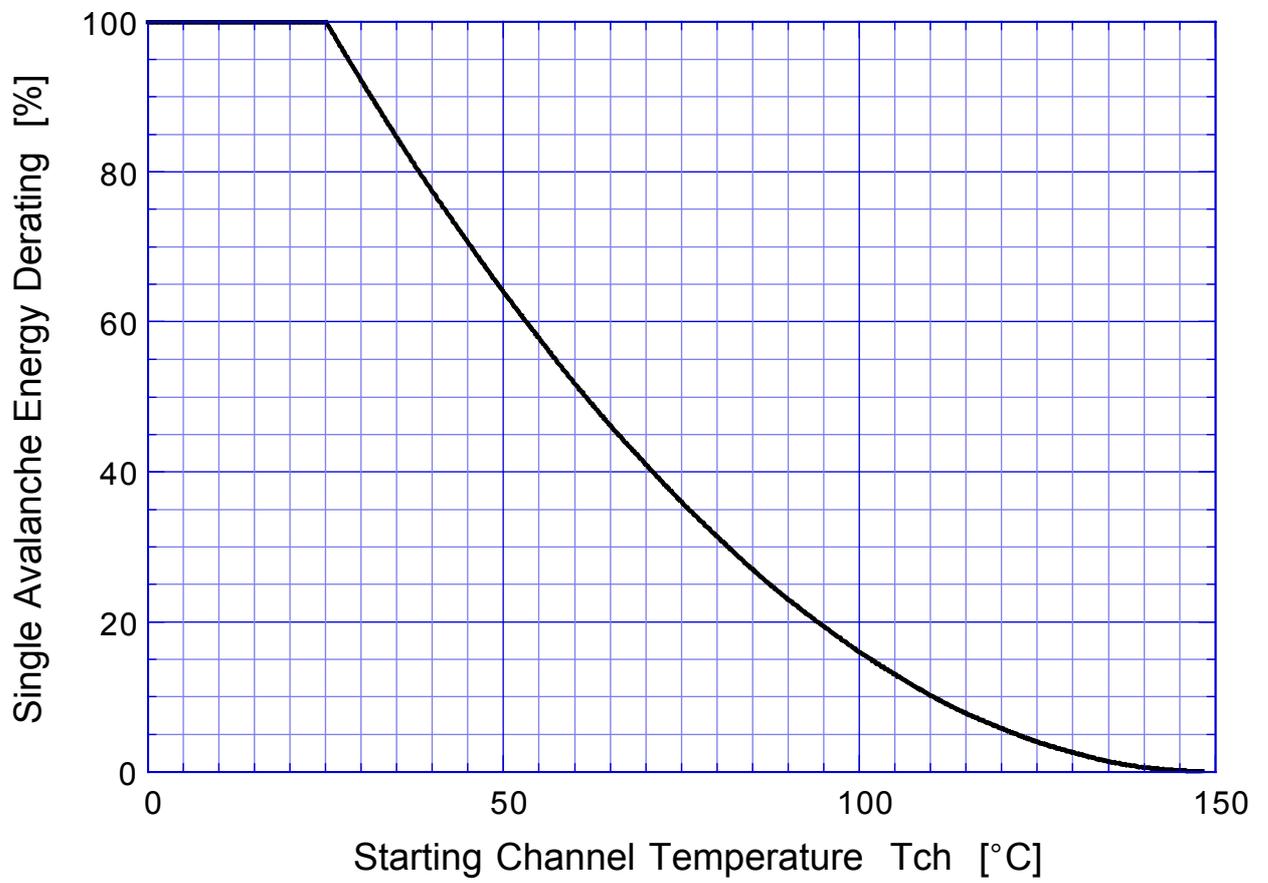

2SK2674 Capacitance

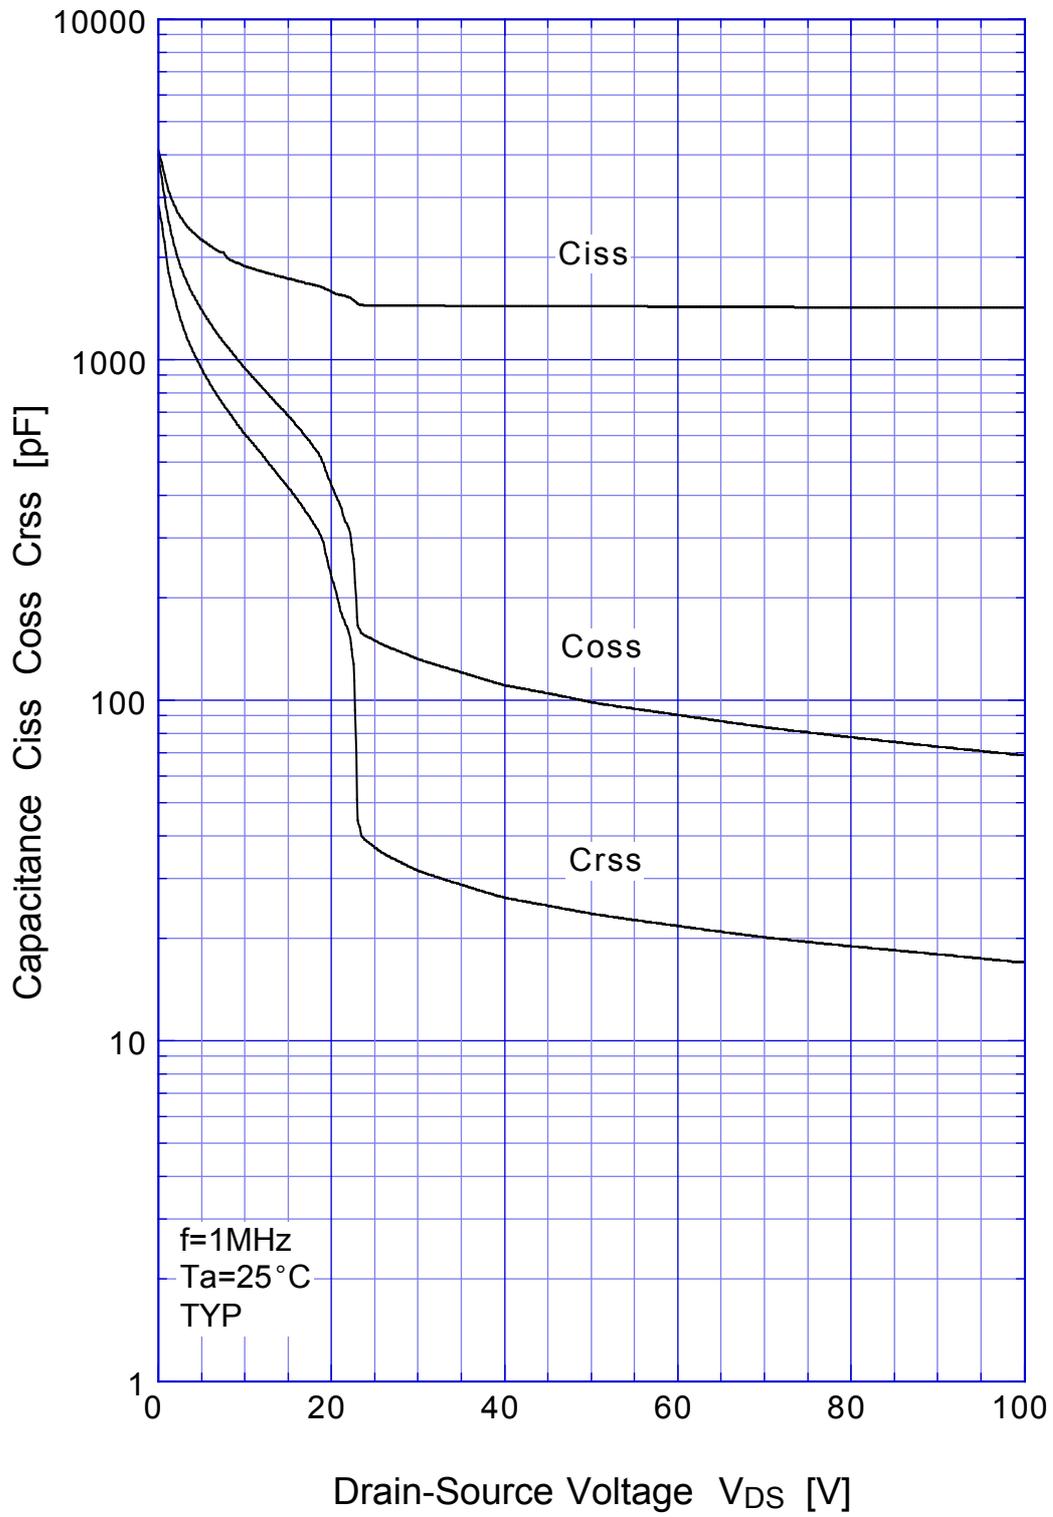


2SK2674 Single Avalanche Current - Inductive Load

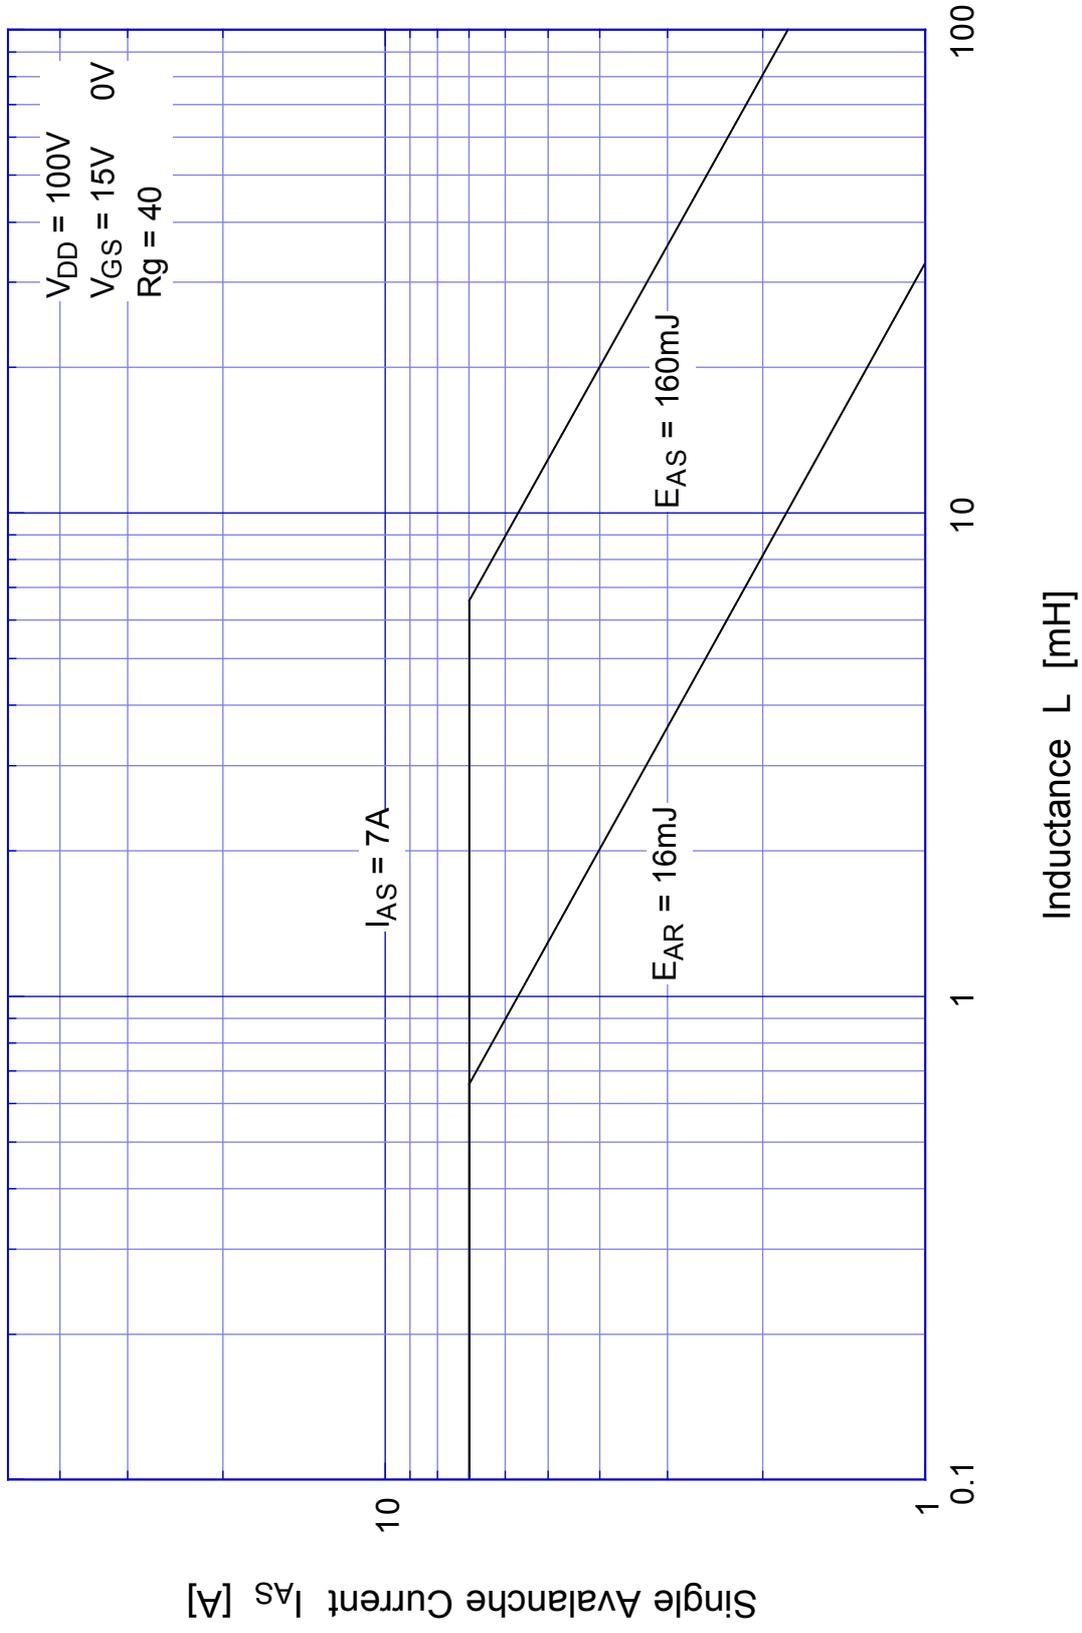


2SK2674

Power Derating

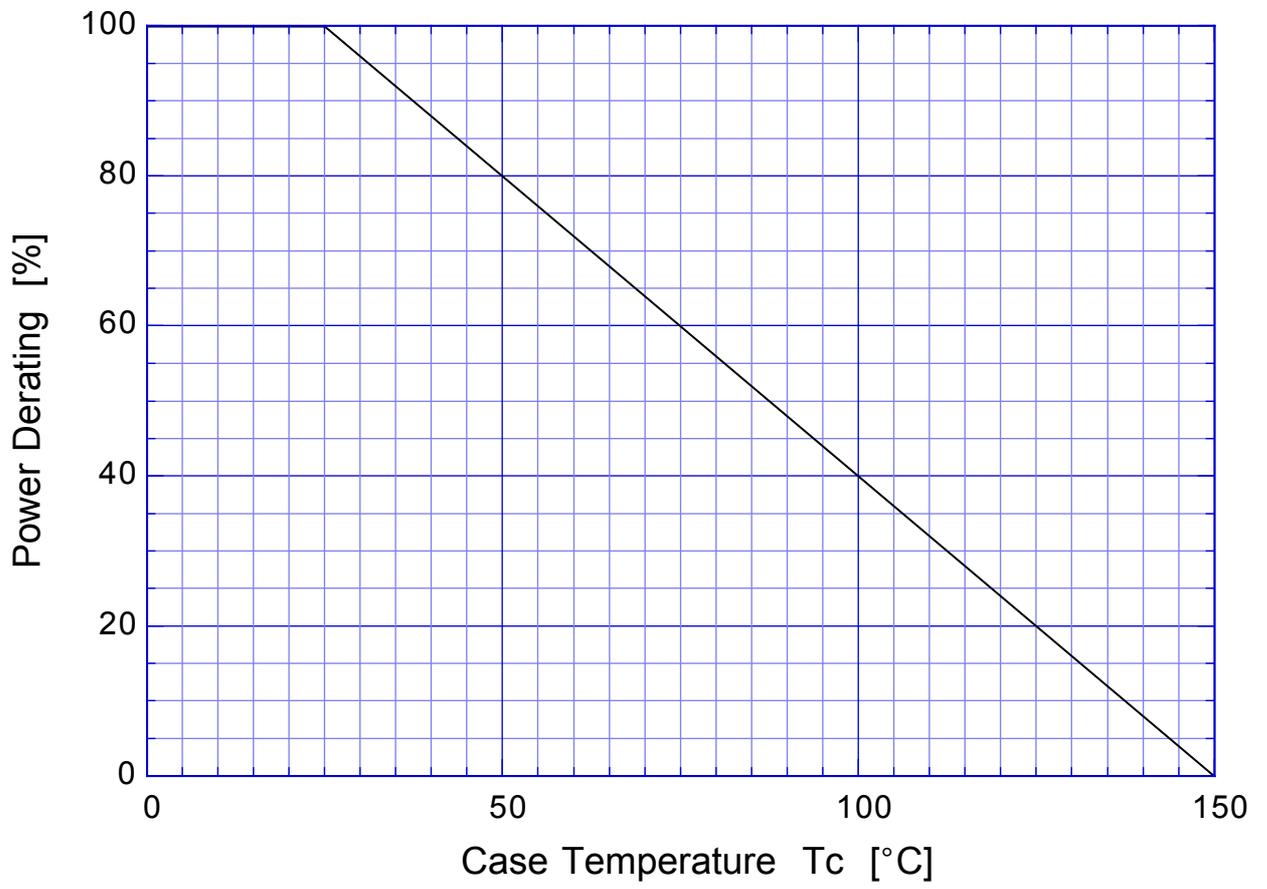

2SK2674 Gate Charge Characteristics

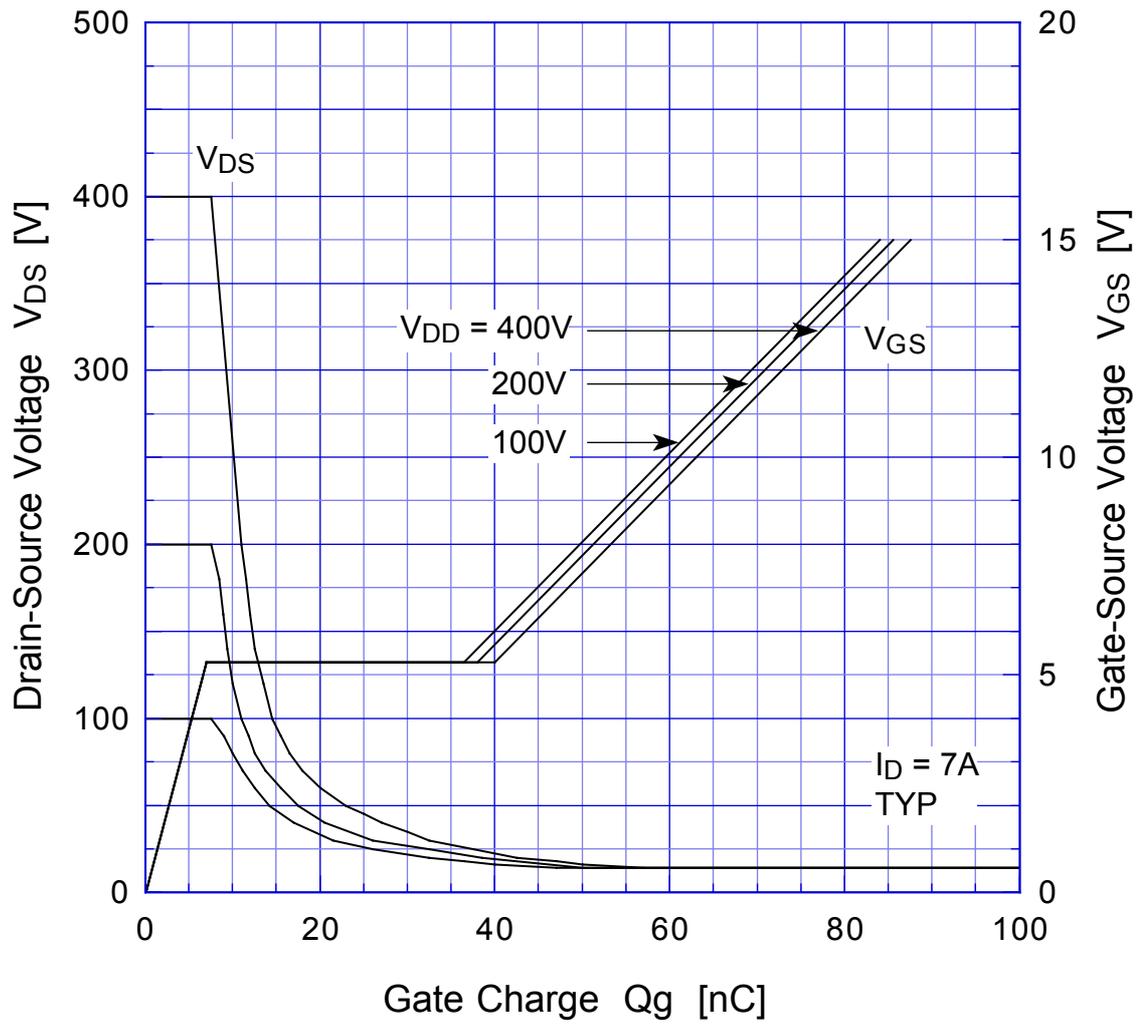

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn