


## **1A Rectifier Diodes**

### **1N4001-1N4007**

#### ■ Features

- Diffused Junction
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 30A Peak
- Low Reverse Leakage Current

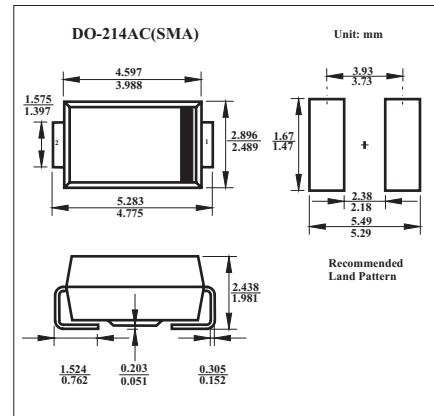

#### ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	1N4001	1N4002	1N4003	1N4004	1N4005	1N4006	1N4007	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	50							
Working Peak Reverse Voltage	V <sub>RWMW</sub>		100	200	400	600	800	1000	V
DC Blocking Voltage	V <sub>R</sub>								
RMS Reverse Voltage	V <sub>R(RMS)</sub>	35	70	140	280	420	560	700	V
Average Rectified Output Current	I <sub>O</sub>				1.0				A
Non-Repetitive Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>				30				A
DC Blocking Voltage Ta = 25°C Ta = 100°C	I <sub>RM</sub>				5				µ A
					50				
Forward Voltage @ If = 1.0A	V <sub>FM</sub>				1.0				V
Typical Junction Capacitance	C <sub>J</sub>		15			8			pF
Typical Thermal Resistance Junction to Ambient	R <sub>θ JA</sub>			100					K/W
Maximum DC Blocking Voltage Temperature	T <sub>A</sub>			+150					°C
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>		-65	to	175				°C

#### ■ Marking

Part NO.	1N4001	1N4002	1N4003	1N4004	1N4005	1N4006	1N4007
Marking	M1	M2	M3	M4	M5	M6	M7