

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC



**TA79005S, TA79006S, TA79007S, TA79008S, TA79009S, TA79010S  
TA79012S, TA79015S, TA79018S, TA79020S, TA79024S**

**1A THREE TERMINAL NEGATIVE VOLTAGE REGULATORS**

**-5V, -6V, -7V, -8V, -9V, -10V, -12V, -15V, -18V, -20V,  
-24V**

**FEATURES**

- Suitable for CMOS, TTL, and the other Digital IC Power Supply
- Internal Thermal Overload Protecting
- Internal Short Circuit Current Limiting
- Output Current in Excess of 1.0A
- Metal Fin (Tab) is fully covered with Mold Resin.  
(TO-220 NIS package)

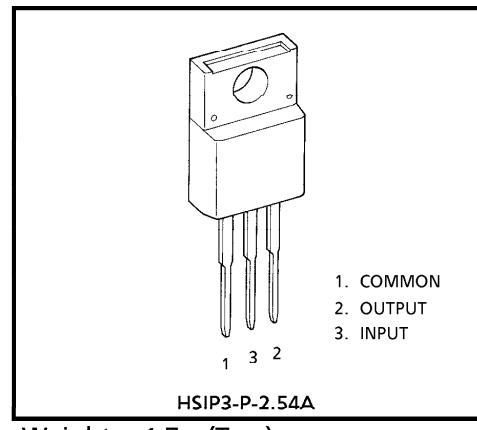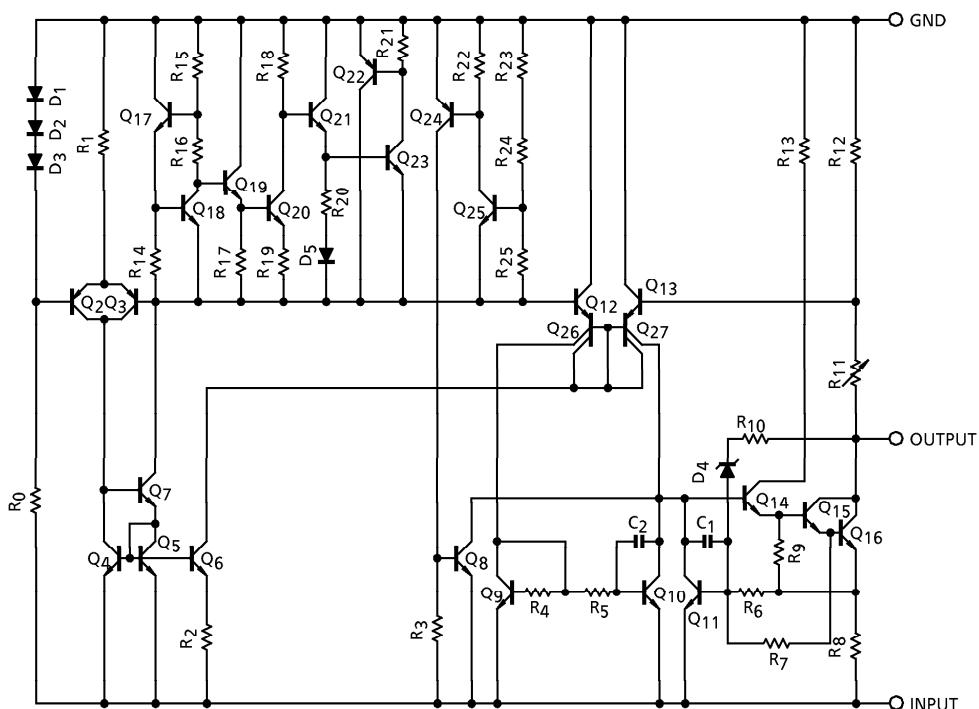**EQUIVALENT CIRCUIT**

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTIC		SYMBOL	RATING	UNIT	
Input Voltage	TA79005S	$V_{IN}$	−35	V	
	TA79006S				
	TA79007S				
	TA79008S				
	TA79009S				
	TA79010S		−40		
	TA79012S				
	TA79015S				
	TA79018S				
	TA79020S				
Power Dissipation	( $T_a = 25^\circ\text{C}$ )	PD	2	W	
	( $T_c = 25^\circ\text{C}$ )		20		
Operating Temperature		$T_{opr}$	−30~75	°C	
Storage Temperature		$T_{stg}$	−55~150	°C	
Operating Junction Temperature		$T_j$	−30~150	°C	
Thermal Resistance		$R_{th(j-c)}$	6.25	°C/W	
		$R_{th(j-a)}$	62.5		

961001EBA2'

- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

TA79005S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -10V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		-5.2	-5.0	-4.8	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-12V \leq V_{IN} \leq -8V$	—	7	50	mV
				$-25V \leq V_{IN} \leq -7V$	—	35	100	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	11	100	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	4	50	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-20V \leq V_{IN} \leq -7V$	-5.25	—	-4.75	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.3	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-25V \leq V_{IN} \leq -7V$	—	—	1.3	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	40	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		63	70	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	0.6	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$		—	2.0	—	V

TA79006S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -11V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		- 6.25	- 6.0	- 5.75	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-13V \leq V_{IN} \leq -9V$	—	9	60	mV
				$-25V \leq V_{IN} \leq -8V$	—	43	120	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	13	120	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	5	60	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-21V \leq V_{IN} \leq -8V$	- 6.3	—	- 5.7	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.3	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-25V \leq V_{IN} \leq -8V$	—	—	1.3	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	45	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		61	68	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	0.7	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$		—	2.0	—	V

TA79007S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -12V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		-7.28	-7.0	-6.72	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-15V \leq V_{IN} \leq -10V$	—	10	70	mV
				$-25V \leq V_{IN} \leq -9V$	—	45	140	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	20	140	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	7	70	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-22V \leq V_{IN} \leq -9V$	-7.35	—	-6.65	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.3	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-25V \leq V_{IN} \leq -9V$	—	—	1.0	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	49	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		60	67	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	0.9	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0 A$		—	2.0	—	V

TA79008S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -14V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		-8.3	-8.0	-7.7	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-17V \leq V_{IN} \leq -11V$	—	11	80	mV
				$-25V \leq V_{IN} \leq -10.5V$	—	47	160	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	26	160	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	9	80	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-23V \leq V_{IN} \leq -10.5V$	-8.4	—	-7.6	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.3	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-25V \leq V_{IN} \leq -10.5V$	—	—	1.0	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	52	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		59	66	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	1.0	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$		—	2.0	—	V

TA79009S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -15V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		-9.3	-9.0	-8.7	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-19V \leq V_{IN} \leq -13V$	—	11	82	mV
				$-26V \leq V_{IN} \leq -11.5V$	—	48	162	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	33	162	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	11	82	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-24V \leq V_{IN} \leq -11.5V$	-9.4	—	-8.6	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.3	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-26.5V \leq V_{IN} \leq -13V$	—	—	1.0	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	60	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		57	64	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	1.1	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$		—	2.0	—	V

TA79010S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -16V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		-10.4	-10	-9.6	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-20V \leq V_{IN} \leq -14V$	—	12	90	mV
				$-27V \leq V_{IN} \leq -12.5V$	—	50	180	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	40	180	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	13	90	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-25V \leq V_{IN} \leq -12.5V$	-10.5	—	-9.5	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.4	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-27.5V \leq V_{IN} \leq -14V$	—	—	1.0	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	65	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		57	63	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	1.3	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$		—	2.0	—	V

TA79012S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -19V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		-12.5	-12	-11.5	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-22V \leq V_{IN} \leq -16V$	—	13	120	mV
				$-30V \leq V_{IN} \leq -14.5V$	—	55	240	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	46	240	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	17	120	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-27V \leq V_{IN} \leq -14.5V$	-12.6	—	-11.4	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.4	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-30V \leq V_{IN} \leq -14.5V$	—	—	1.0	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	75	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		54	61	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	1.6	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$		—	2.0	—	V

TA79015S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -23V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	-15.6	-15	-14.4	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-26V \leq V_{IN} \leq -20V$	—	14	150
				$-30V \leq V_{IN} \leq -17.5V$	—	57	300
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	68	300
				$250mA \leq I_{OUT} \leq 750mA$	—	25	150
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-30V \leq V_{IN} \leq -17.5V$	-15.75	—	-14.25
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$	—	4.4	8.0	mA
Quiescent Current Change	Line Load	1	$T_j = 25^\circ C$	$-30V \leq V_{IN} \leq -17.5V$	—	—	1.0
				$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$	—	90	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$	53	60	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$	—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$	—	2.0	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$	—	2.0	—	V

TA79018S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -27V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	-18.7	-18	-17.3	V	
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-30V \leq V_{IN} \leq -24V$	—	25	180	
				$-33V \leq V_{IN} \leq -21V$	—	80	360	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	110	360	
				$250mA \leq I_{OUT} \leq 750mA$	—	55	180	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-33V \leq V_{IN} \leq -21V$ $5mA \leq I_{OUT} \leq 1.0A$	-18.85	—	-17.15	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$	—	4.5	8.0	mA	
Quiescent Current Change	Line	$\Delta I_{BL}$	1	$-33V \leq V_{IN} \leq -21V$	—	—	1.0	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$	—	110	—	$\mu V_{rms}$	
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$	52	59	—	dB	
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$	—	1.9	—	A	
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$	—	2.5	—	$mV / ^\circ C$	
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$	—	2.0	—	V	

TA79020S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -30V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		-20.8	-20	-19.2	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-32V \leq V_{IN} \leq -26V$	—	28	180	mV
				$-35V \leq V_{IN} \leq -24V$	—	104	360	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	130	360	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	70	180	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-35V \leq V_{IN} \leq -24V$	-21.0	—	-19.0	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.6	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-36.5V \leq V_{IN} \leq -25V$	—	—	1.0	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	140	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		50	57	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	3.0	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$		—	2.0	—	V


TA79024S

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{IN} = -33V$ ,  $I_{OUT} = 500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ )


CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$		-25.0	-24	-23.0	V
Line Regulation	Reg.Line	1	$T_j = 25^\circ C$	$-36V \leq V_{IN} \leq -30V$	—	31	240	mV
				$-38V \leq V_{IN} \leq -27V$	—	118	480	
Load Regulation	Reg.Load	1	$T_j = 25^\circ C$	$5mA \leq I_{OUT} \leq 1.5A$	—	150	480	mV
				$250mA \leq I_{OUT} \leq 750mA$	—	85	240	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ C$	$-38V \leq V_{IN} \leq -27V$	-25.2	—	-22.8	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ C$		—	4.6	8.0	mA
Quiescent Current Change	Line	$\Delta I_{BI}$	1	$-38V \leq V_{IN} \leq -27V$	—	—	1.0	mA
	Load	$\Delta I_{BO}$	1	$5mA \leq I_{OUT} \leq 1.0A$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ C$ , $10Hz \leq f \leq 100kHz$		—	170	—	$\mu V_{rms}$
Ripple Rejection	R.R.	3	$f = 120Hz$ , $I_{OUT} = 20mA$		49	56	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ C$		—	1.9	—	A
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0mA$		—	3.5	—	$mV / ^\circ C$
Dropout Voltage	$V_D$	1	$T_j = 25^\circ C$ , $I_{OUT} = 1.0A$		—	2.0	—	V

## TEST CIRCUIT


1.  $V_{OUT}$ , Reg.line, Reg.load,  $I_B$ ,  $\Delta I_B$ ,  $V_D$ ,  $T_{CVO}$






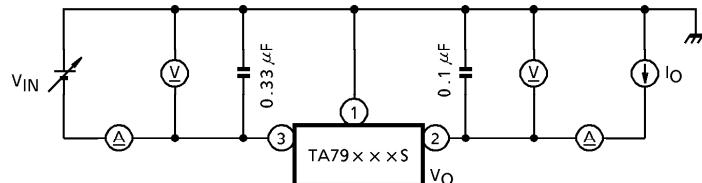


2.  $V_{NO}$

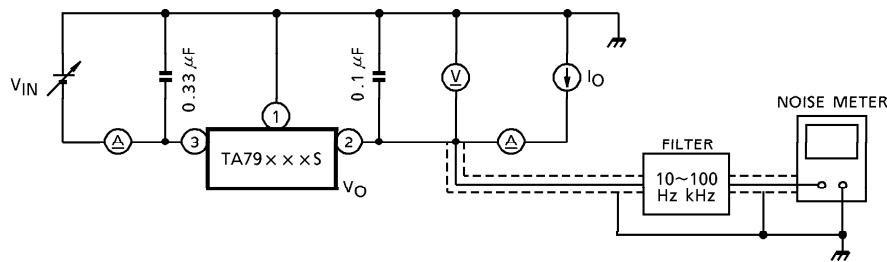

3. R.R.

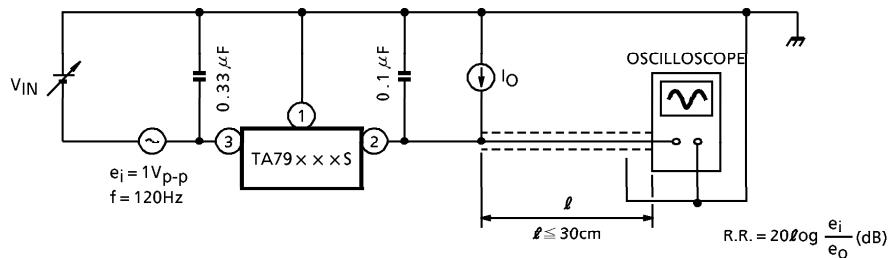


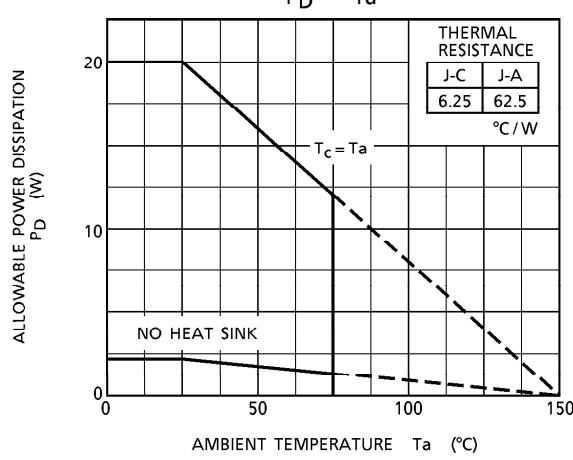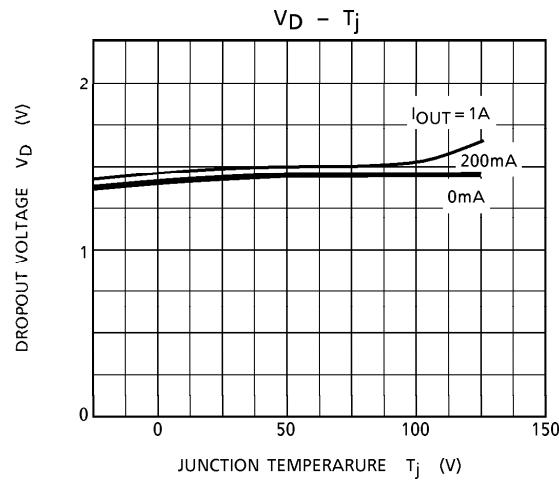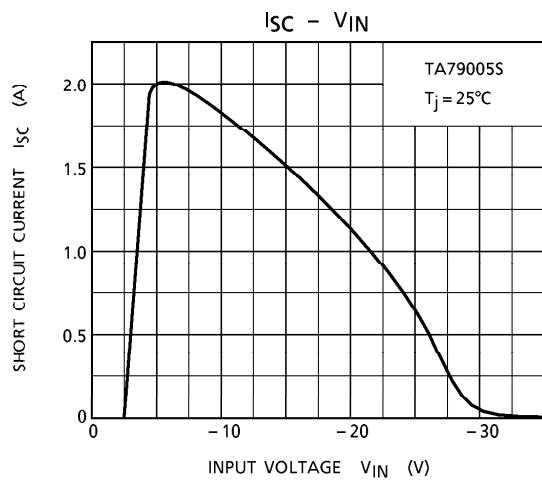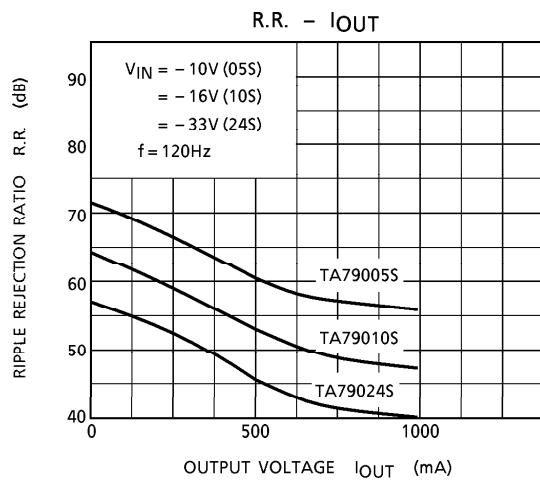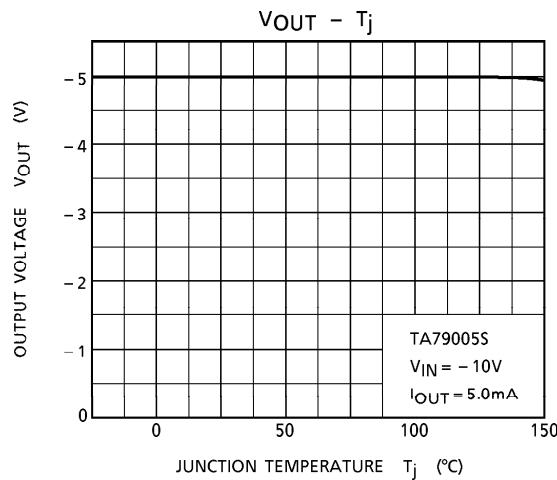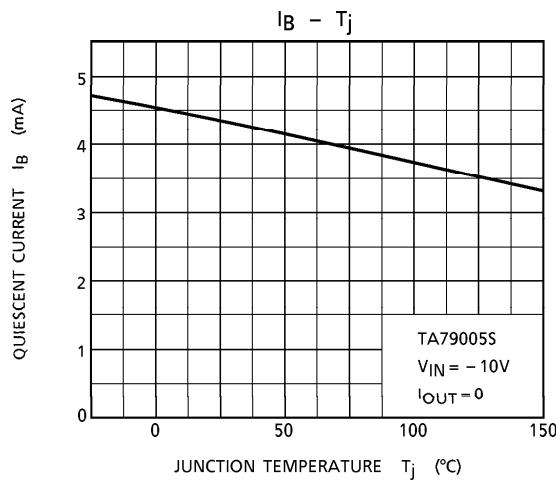

## OUTLINE DRAWING

HSIP3-P-2.54A

Unit : mm

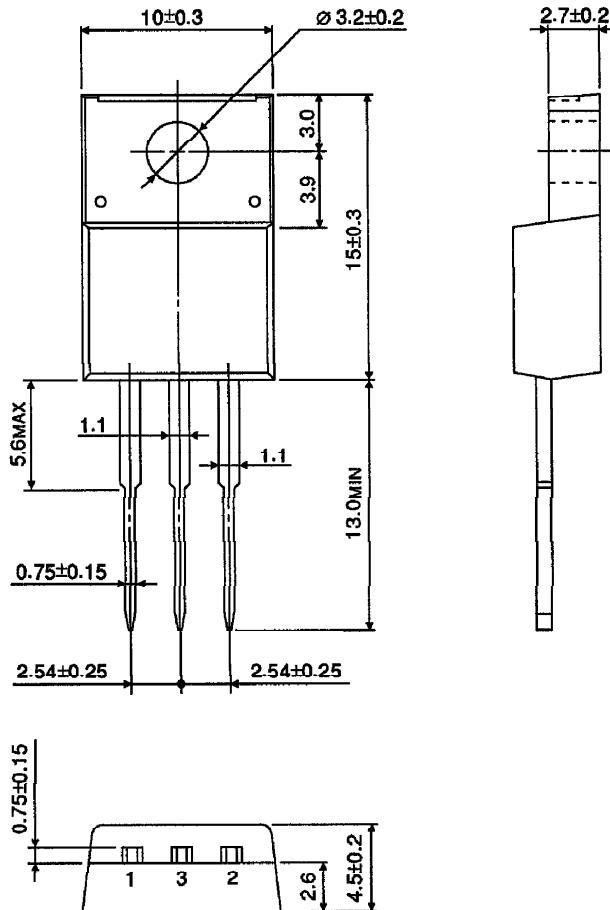

Weight : 1.7g (Typ.)