

Datasheet



AJM-24 Series

AC/DC Power Module 24W, Industrial & Medical Safety



The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

FEATURES

- ▶ Fully Encapsulated Plastic Case for PCB, Chassis and DIN-Rail Mounting Version
- ▶ Universal Input 85~264VAC, 47~440Hz
- ▶ Protection Class II as per IEC/EN 60536
- ▶ I/O Isolation 4000VAC with Reinforced Insulation
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ Designed-in EMI Emission meets EN 55011/32 Class B & FCC Level B
- ▶ Designed-in EMC Immunity meets EN61000-4-2,3,4,5,6,8,11
- ▶ Medical EMC Standard meets 4th Edition of EMI EN 55011 and EMS EN 60601-1-2
- ▶ Medical Safety meets 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1
- ▶ UL508 Safety Approval Specifically for Industrial Application
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval & CE Marking



PRODUCT OVERVIEW

The new MINMAX AJM-24 series is a range of fully encapsulated AC/DC power modules. These high performance products feature an extended operating temperature range of -40°C to +80°C. Universal input voltage 85-264VAC and UL/IEC/EN safety approvals including medical safety and UL508 listing qualify these power supplies modules for applications in products with worldwide markets. EMI-filter meets EN 55011/32, class B and FCC, part 15, class B. The AJM-24 series power modules provide an economical solution for many space critical applications in commercial, medical and industrial electronic equipment.

Model Selection Guide

Model Number	Output Voltage	Output Current Max.	Input Current		Max. capacitive Load	Efficiency (typ.) @ Max. Load, 115VAC
			115VAC, 60Hz	230VAC, 50Hz		
			@ Max. Load			
	VDC	mA	mA(typ.)		μF	%
AJM-24S05	5	3000	282	169	2200	77
AJM-24S09	9	2666	424	255	1000	82
AJM-24S12	12	2000	419	252	1000	83
AJM-24S15	15	1600	424	255	680	82
AJM-24S24	24	1000	409	246	470	85
AJM-24D12	±12	±1000	414	249	470#	84
AJM-24D15	±15	±800	414	249	330#	84

For each output

Input Specifications

Parameter	Conditions / Model		Min.	Typ.	Max.	Unit
AC Voltage Input Range	All Models		85	---	264	VAC
Input Frequency Range			47	---	440	Hz
DC Voltage Input Range			120	---	370	VDC
No-Load Power Consumption			---	---	0.3	W
Inrush Current	115VAC	Cold Start at 25°C	---	---	20	A
	230VAC		---	---	40	A

Output Specifications						
Parameter	Conditions / Model		Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy			---	±2.0	---	%Vnom.
Line Regulation	Vin=Min. to Max. @Full Load		---	±0.5	---	%
Load Regulation	Io=0% to 100%	Single Output Model	---	±0.5	---	%
		Dual Output Models	---	±2.5	---	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	5V Output Models	---	1.5	1.8	%V _{PP} of Vo
		Other Output Models	---	1.0	1.3	%V _{PP} of Vo
Over Voltage Protection	Zener diode clamp			120		% of Vo
Temperature Coefficient			---	±0.02	---	%/°C
Overshoot			---	---	5	%
Over Load Protection	85VAC, Hiccup Mode, auto-recovery (long term overload condition may cause damage)		105	---	---	%Inom.
Short Circuit Protection	Hiccup mode, Automatic Recovery					

General Specifications						
Parameter	Conditions		Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Reinforced Insulation, Rated For 60 Seconds		4000	---	---	VACrms
Leakage Current			---	80	---	μA
I/O Isolation Resistance	500 VDC		1000	---	---	MΩ
Switching Frequency			---	132	---	KHz
Hold-up Time	115VAC, 60Hz		---	20	---	ms
	230VAC, 50Hz		---	80	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign		400,000			Hours
Protection Class II	According IEC/EN 60536					
Safety Standards	UL/cUL 60950-1, CSA C22.2 No 60950-1					
	ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1					
	IEC/EN 60950-1, IEC/EN 60601-1 3 rd Edition 2xMOPP					
Safety Approvals	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)					
	ANSI/AAMI ES60601-1 2xMOPP recognition (UL certificate), IEC/EN 60601-1 3 rd Edition (CB-report)					

Environmental Specifications						
Parameter	Conditions / Model		Min.	Typ.	Max.	Unit
Operating Ambient Temperature Range	Natural Convection		-40	---	+80	°C
Storage Temperature Range			-40	---	+95	°C
Power Derating	Above +65°C	5V Output Models	---	---	0.75	W / °C
		Other Models	---	---	1.2	W / °C
Thermal Shutdown	Shutdown, Internal IC Junction Temperature		---	142	---	°C
	Automatic Recovery, Internal IC Junction Temperature		---	67	---	°C
Humidity (non condensing)			---	---	95	% rel. H
Cooling	Natural Convection					
Lead Temperature (1.5mm from case for 10Sec.)			---	---	260	°C

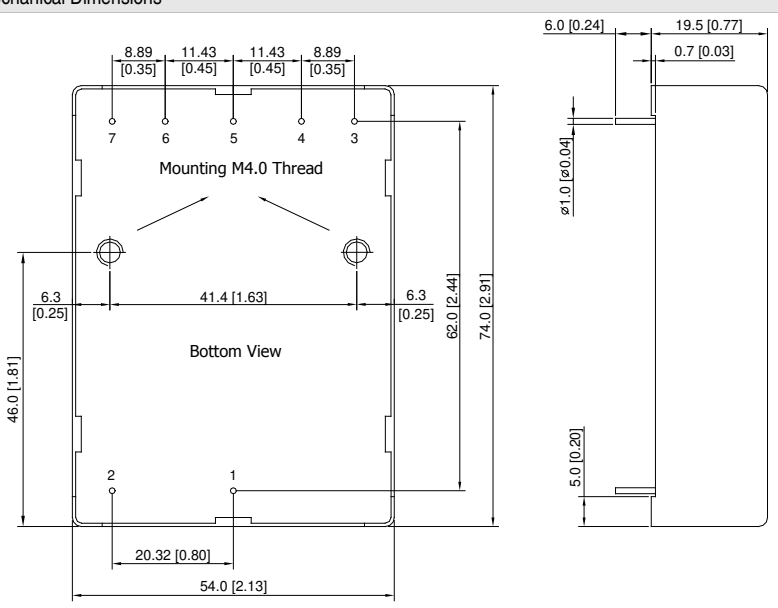
EMC Specifications

Parameter	Standards & Level			Performance
EMI	Conduction and Radiation	EN 55011, EN 55032, EN 61000-6-4, EN 61000-6-3, FCC part 15		Class B
EMS	EN 60601-1-2 4 th , EN 55024, EN 61000-6-2, EN 61000-6-1			
	ESD	EN 61000-4-2 Air \pm 15kV, Contact \pm 8kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 \pm 2kV		A
	Surge	EN 61000-4-5 \pm 1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 30A/m		A
	Dips & Interruptions	EN 61000-4-11	0% of 230VAC	0.5 cycle
		0% of 230VAC	1 cycle	A
		70% of 230VAC	25/30 cycle	A
		0% of 230VAC	250/300 cycle	B

Notes

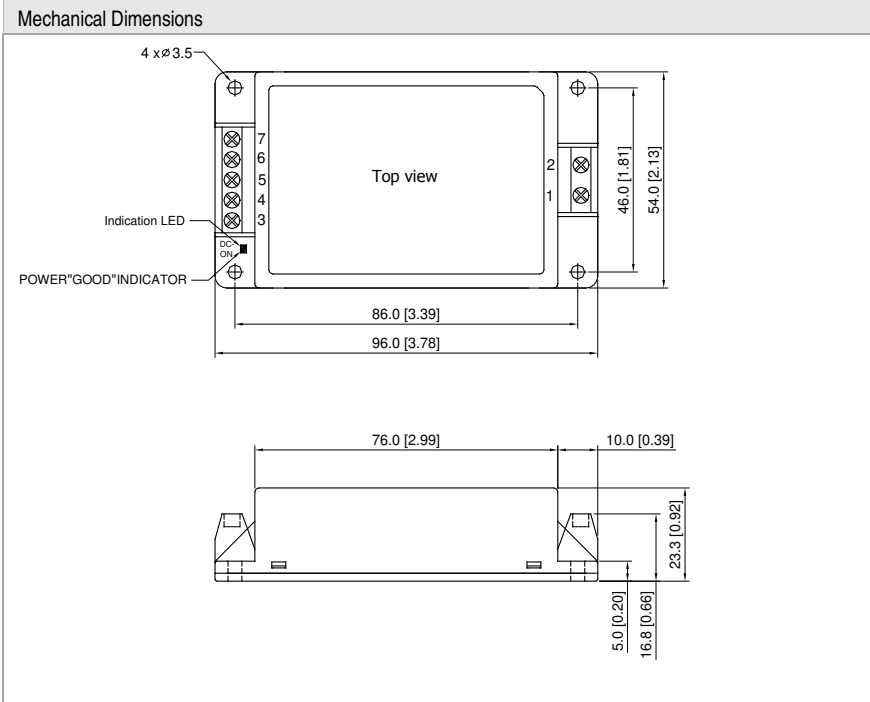
- This product is not designed for use in critical life support systems, equipment used in hazardous environment, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet.
- Specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage, after warm-up time rated output current unless otherwise noted.
- Safety approvals cover frequency 47-63 Hz.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact factory.
- That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- Specifications are subject to change without notice.

Package Specifications PCB Mounting

Mechanical Dimensions		Pin Connections																									
 <p>Bottom View</p> <p>Mounting M4.0 Thread</p> <p>Dimensions: 8.89 [0.35], 11.43 [0.45], 11.43 [0.45], 8.89 [0.35], 6.3 [0.25], 41.4 [1.63], 6.3 [0.25], 74.0 [2.91], 20.32 [0.80], 54.0 [2.13], 6.0 [0.24], 19.5 [0.77], 0.7 [0.03], ϕ1.0 [\pm0.04], 5.0 [0.20]</p>		<table border="1"> <thead> <tr> <th>Pin</th> <th>Single Output</th> <th>Dual Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AC (N)</td> <td>AC (N)</td> </tr> <tr> <td>2</td> <td>AC (L)</td> <td>AC (L)</td> </tr> <tr> <td>3</td> <td>No Pin</td> <td>No Pin</td> </tr> <tr> <td>4</td> <td>-Vout</td> <td>-Vout</td> </tr> <tr> <td>5</td> <td>No Pin</td> <td>Common</td> </tr> <tr> <td>6</td> <td>+Vout</td> <td>+Vout</td> </tr> <tr> <td>7</td> <td>No Pin</td> <td>No Pin</td> </tr> </tbody> </table>		Pin	Single Output	Dual Output	1	AC (N)	AC (N)	2	AC (L)	AC (L)	3	No Pin	No Pin	4	-Vout	-Vout	5	No Pin	Common	6	+Vout	+Vout	7	No Pin	No Pin
Pin	Single Output	Dual Output																									
1	AC (N)	AC (N)																									
2	AC (L)	AC (L)																									
3	No Pin	No Pin																									
4	-Vout	-Vout																									
5	No Pin	Common																									
6	+Vout	+Vout																									
7	No Pin	No Pin																									
<p>► All dimensions in mm (inches)</p> <p>► Tolerance: \pm0.5 (\pm0.02)</p> <p>► Pin diameter ϕ 1.0 \pm0.1 (0.04\pm0.004)</p>																											

Physical Characteristics

Case Size	: 74.0x54.0x19.5mm (2.91x2.13x0.77 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: 137g

Package Specifications Chassis Mounting (order code suffix C)


Connections

Pin	Single Output	Dual Output
1	AC (N)	AC (N)
2	AC (L)	AC (L)
3	NC	NC
4	-Vout	-Vout
5	NC	Common
6	+Vout	+Vout
7	NC	NC

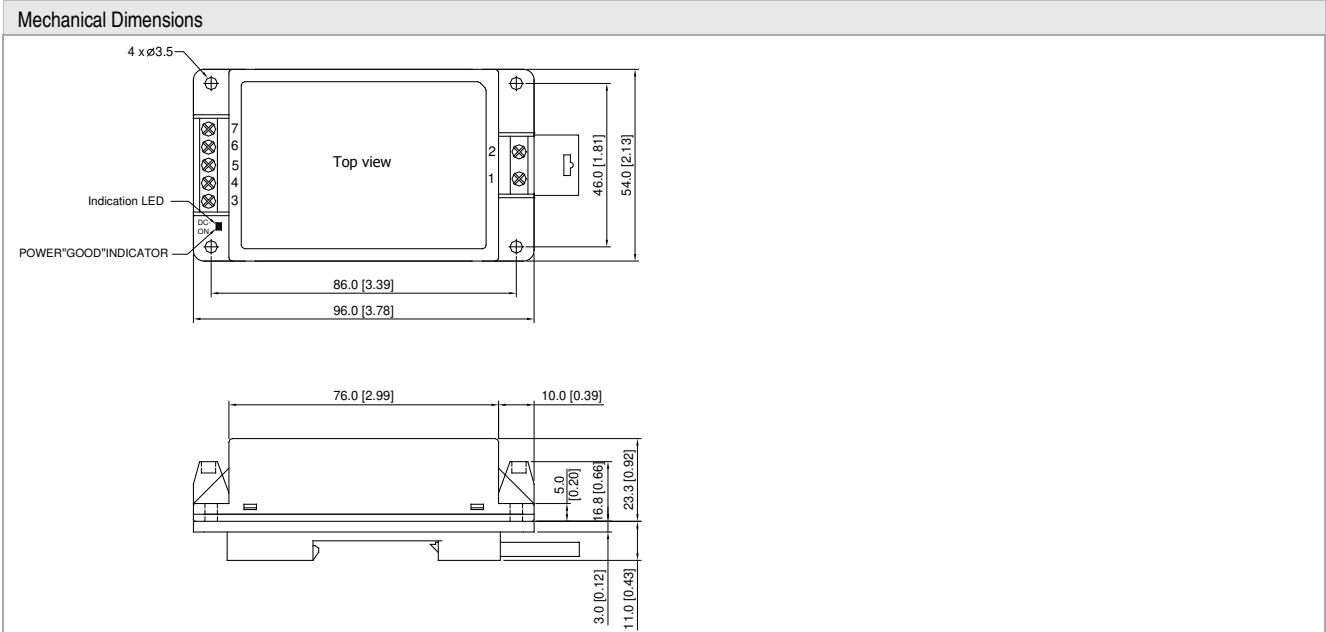
NC: No Connection

▶ All dimensions in mm (inches)

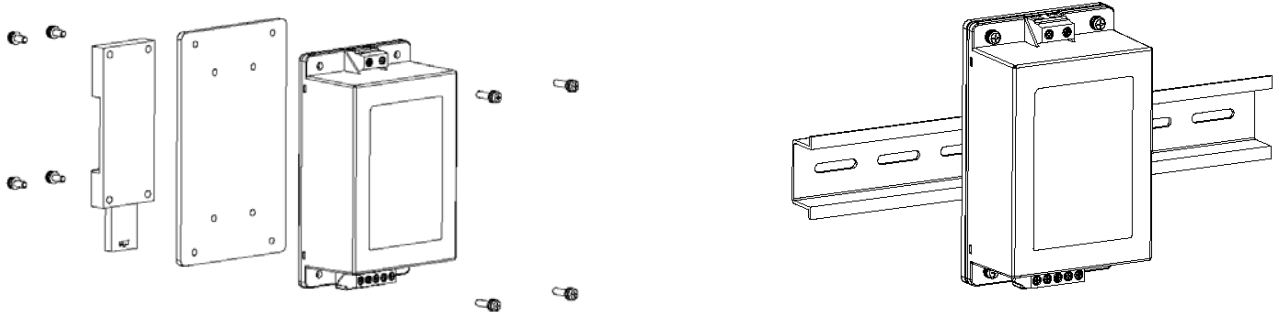
 ▶ Tolerance: ± 0.5 (± 0.02)

Physical Characteristics

Case Size	: 96.0x54.0x23.3mm (3.78x2.13x0.92 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 147g

Package Specifications with DIN Rail Mounting Bracket

Physical Characteristics

Case Size	: 96.0x54.0x23.3mm (3.78x2.13x0.92 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 201g

DIN-Rail Mounting Bracket (Order code for Kit : AC-DIN-01)


Order Code Table			
PCB Mounting	Chassis Mounting	With DIN Rail Mounting by two Order Code	
AJM-24S05	AJM-24S05C	AJM-24S05C	AC-DIN-01
AJM-24S09	AJM-24S09C	AJM-24S09C	AC-DIN-01
AJM-24S12	AJM-24S12C	AJM-24S12C	AC-DIN-01
AJM-24S15	AJM-24S15C	AJM-24S15C	AC-DIN-01
AJM-24S24	AJM-24S24C	AJM-24S24C	AC-DIN-01
AJM-24D12	AJM-24D12C	AJM-24D12C	AC-DIN-01
AJM-24D15	AJM-24D15C	AJM-24D15C	AC-DIN-01

FORTEC

ELEKTRONIK AG

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:



FORTEC Elektronik AG

Hauptniederlassung
Lechwiesenstr. 9
86899 Landsberg am Lech

Telefon: +49 (0) 8191 91172-0

Telefax: +49 (0) 8191 21770

E-Mail: sales@fortecag.de

Internet: www.fortecag.de

FORTEC Elektronik AG

Büro Nord
Am Hasenkamp 36
22457 Hamburg

Telefon: +49 (0) 40 54 80 56 11

Telefax: +49 (0) 40 54 80 56 13

E-Mail: nord@fortecag.de

Internet: www.fortecag.de

FORTEC Elektronik AG

Büro West
Hohenstaufenring 55
50674 Köln

Telefon: +49 (0) 221 272 273-0

Telefax: +49 (0) 221 272 273-10

E-Mail: west@fortecag.de

Internet: www.fortecag.de



FORTEC Elektronik AG

Büro Wien
Nuschinggasse 12
A-1230 Wien

Telefon: +43 1 8673492-0

Telefax: +43 1 8673492-26

E-Mail: office@fortec.at

Internet: www.fortec.at

ALTRAC AG

(Tochter der Fortec AG):
Bahnhofstraße 3
CH-5436 Würenlos

Telefon: +41 (0) 44 7446111

Telefax: +41 (0) 44 7446161

E-Mail: info@altrac.ch

Internet: www.altrac.ch



Members of the FORTEC Group:

ALTRAC

Autronic

EMTRON

DISTEC
A FORTEC GROUP MEMBER

**DISPLAY
TECHNOLOGY**
A FORTEC GROUP MEMBER

**APOLLO DISPLAY
TECHNOLOGIES**
A FORTEC GROUP MEMBER