


Ceramic Resonator Bandpass Filter

CSBP-B1300-75+

75Ω 1210 to 1390 MHz



CASE STYLE: KR1508

The Big Deal

- Excellent Rejection
1080 MHz, 1530 MHz: 32 dB typ.
1020 MHz, 1630 MHz: 53 dB typ.
- Low Passband Insertion Loss, 0.7 dB typ.
- Stable IL vs. Temperature: ±0.35 dB typ.

Product Overview

The Mini-Circuits CSBP-B1300-75+ is a ceramic-coaxial-resonator based bandpass offering outstanding close-in rejection, low insertion loss and high power handling for use in CATV applications.

Key Features

Feature	Advantages
High Selectivity	The CSBP-B1300-75+ filter incorporates High-Q custom ceramic resonators that enable sharp rejection near the passband while maintaining 14% passband bandwidth.
Low Passband VSWR: 1.2:1 typ.	The CSBP-B1300-75+ filter maintains typical VSWR over a wide passband frequency range making this filter easier to integrate into receiver and transmitter RF chains with less concerns for in-band frequency ripple.
RF Power Handling: 14.5W	Tested at high level RF powers, the CSBP-B1300-75+ can withstand high power CW signals within the passband making this filter ideal for higher power transmit.
Temperature Stability: ±0.35dB	The use of highly stable materials enables the CSBP-B1300-75+ to maintain minimal insertion loss variation over a wide temperature range over the passband and stopband.
Rugged construction	The CSBP-B1300-75+ has been qualified over a wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles.
Small size: 1.505" x 0.67 x 0.285"	The use of high dielectric constant resonators enables the CSBP-B1300-75+ to support a large number of poles in a small footprint enabling high selectivity in a small surface mount design.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IFIRF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Bandpass Filter

CSBP-B1300-75+

75Ω 1210 to 1390 MHz



CASE STYLE: KR1508
PRICE: \$29.95 ea. QTY (1-9)

Features

- Low Insertion Loss, 0.7 dB typ.
- Minimal Insertion loss variation over operating temperature, ±0.35 dB
- High power handling, 14.5 W
- Wide pass band (14%), high selectivity


Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	1300	—	MHz	
	Insertion Loss	F1-F2	1210 - 1390	—	1.0	2.0	dB
	VSWR	F1-F2	1210 - 1390	—	1.5	1.75	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 1080	20	33	—	dB
	VSWR	DC-F3	DC - 1080	—	35	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	1545 - 2500	20	30	—	dB
	VSWR	F4-F5	1545 - 2500	—	30	—	:1

Applications

- Sub harmonic filtering
- Image Rejection
- Receivers/Transmitters
- Cable TV

Functional Schematic




Maximum Ratings	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	14.5W max. at 25°C

*Derate linearly to 10W at 85°C
Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C




Frequency (MHz)	Insertion Loss (dB)	VSWR-In (:1)	VSWR-Out (:1)
0.5	92.75	8795.04	1737.18
500	78.04	102.58	105.58
1020	54.44	69.39	70.42
1080	33.59	42.78	41.69
1120	17.10	19.11	17.32
1140	8.78	8.25	7.85
1155	4.21	3.86	3.87
1170	2.01	2.24	2.30
1210	0.93	1.14	1.18
1300	0.80	1.12	1.13
1390	1.03	1.17	1.20
1440	10.19	13.39	13.92
1470	18.75	30.92	31.71
1545	36.47	53.53	53.45
1630	53.63	62.02	71.45
2500	61.83	29.12	15.25
2660	53.45	27.60	38.34

Typical Frequency Response

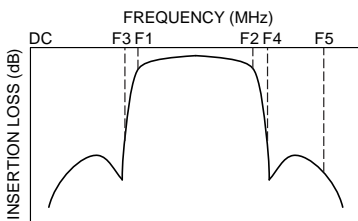

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

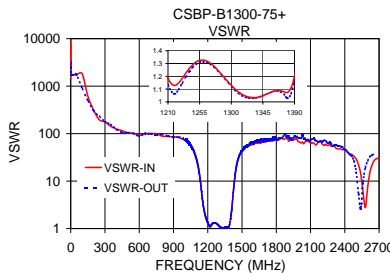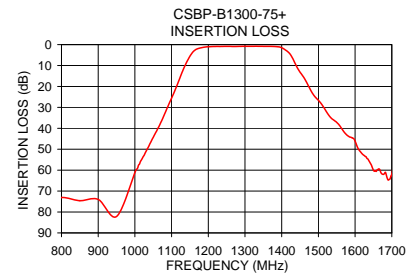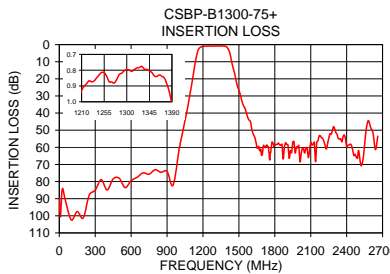

For detailed performance specs & shopping online see web site


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Pad Connections


INPUT	1
OUTPUT	9
GROUND	2 to 8, 10 to 16

Demo Board MCL P/N: TB-576+ Suggested PCB Layout (PL-333)

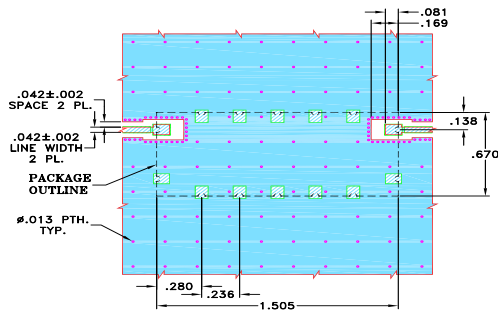

- NOTES:**
- TRACE WIDTH IS SHOWN FOR OAK 602 WITH DIELECTRIC THICKNESS .031"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

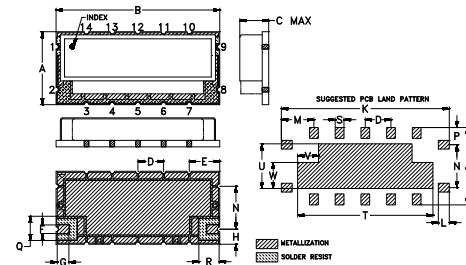

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	J	K	L
.670	1.505	.285	.236	.280	.079	.108	0.138	0.71	1.545	0.1
17.02	38.23	7.24	5.99	7.11	2.01	2.74	3.51	18.03	39.24	2.54
M	N	P	Q	R	S	T	U	V	W	wt
0.3	.394	.158	.222	.187	.080	1.245	0.41	.192	.238	grams
7.62	10.01	4.01	5.64	4.75	2.03	31.62	10.41	4.88	6.05	9.80