

Olitech Electronics Co. Ltd

Email: info@olitech-elec.com Website: www.olitech-elec.com

SILICON BRIDGE RECTIFIERS

KBPC35005 THRU KBPC3510 AND MB3505 THRU MB3510

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 35.0 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory
- Flammability Classification 94V-0
- Ideal for printed circuit boards
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 seconds, at 5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case: Metal case
- Terminals : Plated 0.25 " (6.35mm) lug.
- Polarity : Polarity symbols marked on case
- Mounting : Thru hole for #8 screw, 20in.-lbs. torque max.
- Weight: 1.02 ounce, 29 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase half-wave 60Hz, resistive or inductive load, for current capacitive load current derate by 20%.

	SYMBOLS	KBPC 35005 MB3505	KBPC 3501 MB351	KBPC 3502 MB352	KBPC 3504 MB354	KBPC 3506 MB356	KBPC 3508 MB358	KBPC 3510 MB3510	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward output rectified current at $T_c=50^\circ\text{C}$ (Note 1,2)	$I_{(AV)}$	35							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	400.0							Amps
Rating for Fusing ($t < 8.3\text{ms}$)	I^2t	664							A^2s
Maximum instantaneous forward voltage drop per bridge element at 17.5A	V_F	1.1							Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	10							μA
		1.0							mA
Isolation voltage from case to leads	V_{ISO}	2500							V_{AC}
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	2.0							$^\circ\text{C/W}$
Operating junction temperature range	T_J	-65 to +150							$^\circ\text{C}$
storage temperature range	T_{STG}	-65 to +150							$^\circ\text{C}$

NOTES:

1. Unit mounted on 9" x 3.5" x 4.6" thick (23cm x 9cm x 11.8cm) Al. plate.
2. Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #8 screw.

KBPC25 (MB-35)

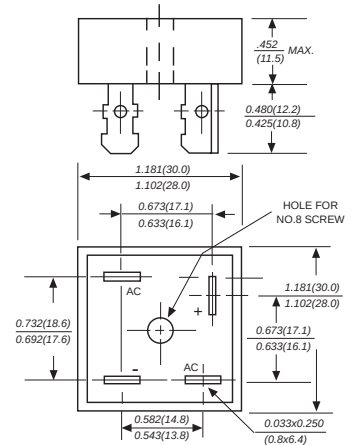

Dimensions in inches and (millimeters)

Olitech Electronics Co. Ltd

Email: info@olitech-elec.com

Website: www.olitech-elec.com

KBPC35005 THRU KBPC3510
AND MB3505 THRU MB3510


SILICON BRIDGE RECTIFIERS

VOLTAGE RANGE 50 to 1000 Volts

CURRENT 35.0 Ampere

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

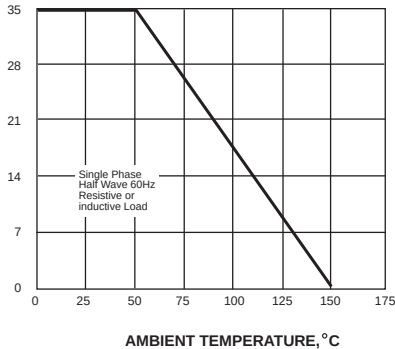

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


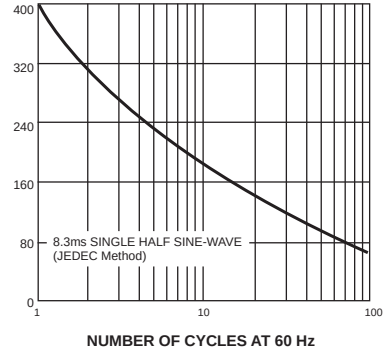


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

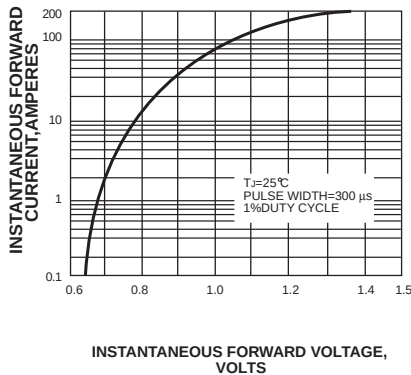

INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS


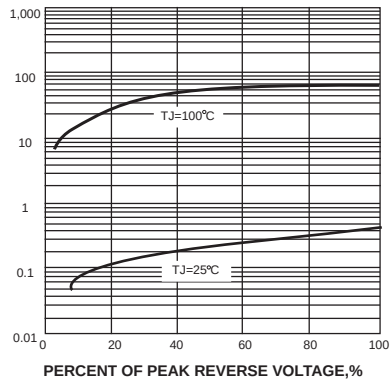


FIG. 5-TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

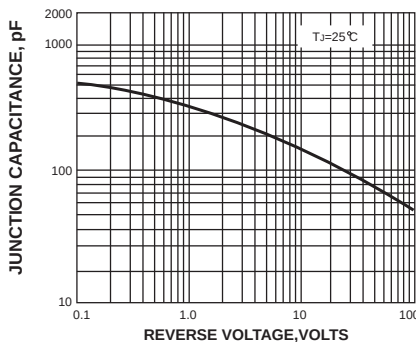