- Package Options Include Plastic and Ceramic DIPs and Ceramic Flat Packages
- Dependable Texas Instruments Quality and Reliability

#### description

The '76 contains two independent J-K flip-flops with individual J-K, clock, preset, and clear inputs. The '76 is a positive-edge-triggered flipflop. J-K input is loaded into the master while the clock is high and transferred to the slave on the high-to-low transition. For these devices the J and K inputs must be stable while the clock is high.

The 'LS76A contain two independent negativeedge-triggered flip-flops. The J and K inputs must be stable one setup time prior to the highto-low clock transition for predicatble operation. The preset and clear are asynchronous active low inputs. When low they override the clock and data inputs forcing the outputs to the steady state levels as shown in the function table.

The SN5476 and the SN54LS76A are characterized for operation over the full military temperature range of -55 °C to 125 °C. The SN7476 and the SN74LS76A are characterized for operation from 0 °C to 70 °C.

SN5476, SN54LS76A . . . J PACKAGE SN7476 . . . N PACKAGE SN74LS76A . . . D OR N PACKAGE (TOP VIEW)

1 CLK 1 16 1K   1 PRE 2 15 10   1 CLR 3 14 10   1 J 4 13 GND   VCC 5 12 2K   2CLK 6 11 20   2 PRE 7 10 20   2 CLR 8 9 2J		•••••	,	
	1 PRE 1 CLR 1 J VCC 2 CLK 2 PRE	- 3 4 5	15 14 13	] 10 ] 10 ] GND ] 2K ] 20 ] 20
	2 0 1 1 1	<u> </u>		1

	76 FUNCTION TABLE											
INPUTS OUTPUTS												
PRE	CLR	CLK	J	к	Q	ā						
L	н	×	х	х	н	L						
н	L	×	х	х	L L	н						
L	L	х	х	х	нt	HT						
н	н	л	L	L	0 <sub>0</sub>	ā <sub>0</sub>						
н	н	л	н	Ł	н	L						
н	н	л	L	н	L	н						
н	н	л	н	н	TOG	GLE						

LS76A


FUNCTION TABLE											
	IN	OUTPUTS									
PRE	CLR	CLK	J	к	Q	ā					
L	н	х	х	Х	н	L					
н	L	х	х	х	L	н					
L	L	×	х	х	н†	нţ					
н	н	÷.	L	L	Q0	$\overline{\alpha}_0$					
н	н	ţ	н	L	н	Ļ					
н	н	Ļ	L	н	L	н					
н	н	Ļ	н	н	TOGGLE						
н	н	н	х	х	0 <sub>0</sub>	$\overline{\Omega}_0$					

<sup>†</sup> This configuration is nonstable; that is, it will not persist when either preset or clear returns to its inactive (high) level.




# SN5476, SN54LS76A SN7476, SN74LS76A DUAL J-K FLIP-FLOPS WITH PRESET AND CLEAR SDLS121 – DECEMBER 1983 – REVISED MARCH 1988

# logic diagrams (positive logic)

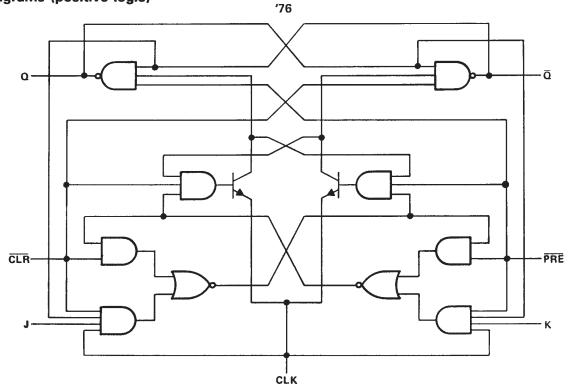



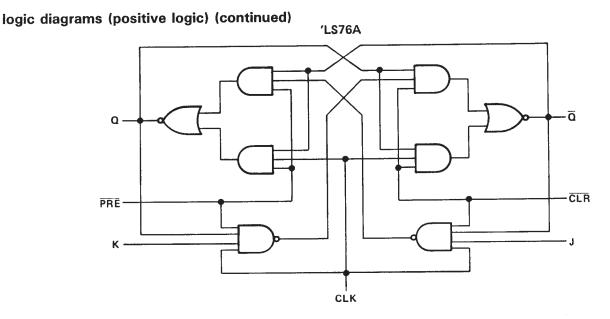



### logic symbols<sup>†</sup>



<sup>†</sup>These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

#### schematics of inputs and outputs









# SN5476, SN54LS76A SN7476, SN74LS76A DUAL J-K FLIP-FLOPS WITH PRESET AND CLEAR SDLS121 – DECEMBER 1983 – REVISED MARCH 1988

## schematics of inputs and outputs (continued)





#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

'LS76A

Supply voltage, V <sub>CC</sub> (see Note 1)	7 V
Input voltage: '76	
'LS76A	7 V
Operating free-air temperature range: SN54' 55 °C to 12	5°C
SN74' 0°C to 7	0°C
Storage temperature range	0°C

NOTE 1: Voltage values are with respect to network ground terminal.



#### recommended operating conditions

				SN5476	5		SN7476	6	
			MIN	NOM	MAX	MIN	NOM	MAX	UNIT
Vcc	Supply voltage		4.5	5	5.5	4.75	5	5.25	V
VIH	High-level input voltage		2			2			V
VIL	Low-level input voltage	······································			0.8			0.8	V
ЮН	High-level output current				0.4			- 0.4	mA
IOL	Low-level output current				16			16	mA
		CLK high	20		-	20			Ţ
tw	Pulse duration	CLK low	47			47			ns
		PRE or CLR low	25			25			
t <sub>su</sub>	Input setup time before CLK †		0			0			ns
th	Input hold time-data after CLK ↓		0			0			ns
TA	Operating free-air temperature		- 55		125	0		70	°C

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

				evet		SN5476			SN7476		UNIT
PAR	AMETER		TEST CONDITIO	ONS	MIN	TYP‡	MAX	MIN	TYP‡	MAX	UNIT
VIK		V <sub>CC</sub> = MIN,	lj = − 12 mA				- 1.5			- 1.5	V
Vон		V <sub>CC</sub> = MIN, I <sub>OH</sub> = - 0.4 mA	V <sub>IH</sub> = 2 V,	V <sub>1L</sub> = 0.8 V,	2.4	3.4		2.4	3.4		v
VOL		V <sub>CC</sub> = MIN, I <sub>OL</sub> = 16 mA	V <sub>IH</sub> = 2 V,	V <sub>IL</sub> = 0.8 V,		0.2	0.4		0.2	0.4	v
ξį.		V <sub>CC</sub> = MAX,	V <sub>I</sub> = 5.5 V				1			1	mA
	J or K		N - 0 4 M				40			40	μA
ЧН	All other	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 2.4 V				80			80	<u><u></u></u>
	J or K						- 1.6			- 1.6	mA
ηr	All other	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 0.4 V				- 3.2			- 3.2	- IIIA
los§		V <sub>CC</sub> = MAX			- 20		- 57	- 18		- 57	mA
ICC#	THE PARTY OF THE P	V <sub>CC</sub> = MAX,	See Note 2			10	20		10	20	mA

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

<sup>‡</sup>All typical values are at  $V_{CC} = 5 V$ ,  $T_A = 25 °C$ .

§ Not more than one output should be shorted at a time.

¶Clear is tested with preset high and preset is tested with clear high.

#Average per flip-flop.

NOTE 2: With all outputs open, I<sub>CC</sub> is measured with the Q and Q outputs high in turn. At the time of measurement, the clock input is grounded.

switching characteristics,	, VCC = 5 \	V, T <u>A</u> = 25°C	(see note 3)
----------------------------	-------------	----------------------	--------------

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	түр	MAX	UNIT
fmax				15	20		MHz
tPLH	PRE or CLR	$Q$ or $\overline{Q}$			16	25	ns
<sup>t</sup> PHL	FRE OF CER	2012	$R_{L} = 400 \Omega$ , $C_{L} = 15 pF$		25	40	ns
tPLH	CLK	Q or Q	]		16	25	ns
<sup>t</sup> PHL	ULK				25	40	ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



#### SN5476, SN54LS76A SN7476, SN74LS76A DUAL J-K FLIP-FLOPS WITH PRESET AND CLEAR SDLS121 – DECEMBER 1983 – REVISED MARCH 1988

SDLS121 - DECEMBER 1983 - REVISED MARCH 198

#### recommended operating conditions

			S	N54LS7	6A	SI	V74LS7	6A	UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	UNIT
Vcc	Supply voltage		4.5	5	5.5	4.75	5	5.75	V
VIH	High-level input voltage		2			2			V
VIL	Low-level input voltage				0.7			0.8	V
ЮН	High-level output current				- 0.4			- 0.4	mA
IOL	Low-level output current		Î		4			8	mA
fclock	Clock frequency		0		30	0		30	MHz
		CLK high	20			20			ns
tw	Pulse duration	PRE or CLR low	25	·		25			115
		data high or low	20			20			
t <sub>su</sub>	Setup time before CLK↓	CLR inactive	20			20			ns
		PRE inactive	25			25			
t <sub>h</sub>	Hold time-data after CLK		0		-	0			ns
TA	Operating free-air temperature		- 55		125	0		70	°C

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

					S	N54LS7	6A	S	N74LS7	6A	UNIT
	PARAMETER		TEST CONDITIO	DNS	MIN	түр‡	MAX	MIN	түр‡	MAX	UNIT
VIK		V <sub>CC</sub> = MIN,	lı = — 18 mA				- 1.5	<u> </u>		- 1.5	V
vон		V <sub>CC</sub> = MIN, I <sub>OH</sub> = − 0.4 mA	V <sub>IH</sub> = 2 V,	VIL = MAX,	2.5	3.4		2.7	3.4		v
		V <sub>CC</sub> = MIN, I <sub>OL</sub> = 4 mA	VIL = MAX,	V <sub>IH</sub> = 2 V,		0.25	0.4		0.25	0.4	v
VOL		V <sub>CC</sub> = MIN, i <sub>OL</sub> = 8 mA	V <sub>IL</sub> = MAX,	V <sub>IH</sub> = 2 V,					0.35	0.5	
	J or K						0.1			0.1	<u> </u>
I <sub>E</sub>	CLR or PRE	V <sub>CC</sub> = MAX,	V <sub>1</sub> = 7 V				0.3			0.3	mA
	CLK						0.4			0.4	
	J or K						20			20	
ЧΗ	CLR or PRE	V <sub>CC</sub> = MAX,	V <sub>1</sub> = 2.7 V				60			60	μA
••••	CLK						80			80	
	J or K						- 0.4			- 0.4	mA
μL	All other	$-V_{CC} = MAX,$	∨ <sub>1</sub> = 0.4 ∨				- 0.8			- 0.8	A
los§	<u> </u>	V <sub>CC</sub> = MAX,	See Note 4		- 20		- 100	- 20		- 100	mA
	Total)	V <sub>CC</sub> = MAX,	See Note 2			4	6		4	6	mA

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at  $V_{CC} = 5 V$ ,  $T_A = 25^{\circ}C$ .

§Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

NOTE 2: With all outputs open, I<sub>CC</sub> is measured with the Q and Q outputs high in turn. At the time of measurement, the clock input is grounded.

NOTE 4: For certain devices where state commutation can be caused by shorting an output to ground, an equivalent test may be performed with V<sub>O</sub> = 2.25 V and 2.125 V for the 54 family and the 74 family, respectively, with the minimum and maximum limits reduced to one half of their stated values.

# switching characteristics, $V_{CC}$ = 5 V, $T_A$ = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	түр	МАХ	UNIT
fmax				30	45		MHz
tPLH			$R_L = 2 k\Omega$ , $C_L = 15 pF$		15	20	ns
<sup>t</sup> PHL	PRE, CLR or CLK	Q or Q	-		15	20	ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.





15-Apr-2017

# **PACKAGING INFORMATION**

Orderable Device	Status	Package Type		Pins	•	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
5962-9557501QEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-9557501QE A SNJ5476J	Samples
5962-9557501QFA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-9557501QF A SNJ5476W	Samples
5962-9557501QFA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-9557501QF A SNJ5476W	Samples
7601301EA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	7601301EA SNJ54LS76AJ	Samples
7601301EA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	7601301EA SNJ54LS76AJ	Samples
JM38510/00204BEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	JM38510/ 00204BEA	Samples
JM38510/00204BEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	JM38510/ 00204BEA	Samples
M38510/00204BEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	JM38510/ 00204BEA	Samples
M38510/00204BEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	JM38510/ 00204BEA	Samples
SN5476J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	SN5476J	Samples
SN5476J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	SN5476J	Samples
SN54LS76AJ	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	SN54LS76AJ	Samples
SN54LS76AJ	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	SN54LS76AJ	Samples
SNJ5476J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-9557501QE A SNJ5476J	Samples
SNJ5476J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-9557501QE A SNJ5476J	Samples
SNJ5476W	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-9557501QF	Samples



15-Apr-2017

Orderable Device	Status	Package Type	Package	Pins	Package	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
										A SNJ5476W	
SNJ5476W	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-9557501QF	Samples
										A SNJ5476W	
SNJ54LS76AJ	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	7601301EA SNJ54LS76AJ	Samples
SNJ54LS76AJ	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	7601301EA SNJ54LS76AJ	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW**: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between

the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.



www.ti.com

15-Apr-2017

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

W (R-GDFP-F16)

CERAMIC DUAL FLATPACK



- NOTES: A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only.
  - E. Falls within MIL STD 1835 GDFP2-F16



J (R-GDIP-T\*\*) 14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2019, Texas Instruments Incorporated